

# **Bed Management Solution (BMS)**

## **Technical Manual**



**January 2020**

## Revision History

<b>Creation Date</b>	<b>Version No.</b>	<b>Description/Comments</b>	<b>Author(s)</b>	<b>Reviewer(s)</b>	<b>Review Type</b>	<b>Issue Date</b>
01/13/2020	0.12	Updated for Version 2.4: Minor editing changes to format. Updated release dates on title page and footer.	D. Horn/ D. Tran			
4/23/2019 – 07/24/2019	0.11	Updated document for BMS v2.3.1: Updates to Figure Diagrams to reflect current BMS is using VIA not MDWS, updated parameter tables to include VIA parameters, updated, new service account user to reflect new service account for new server migration.	H. Gau			07/24/2019
12/19/2016	0.10	Updated for BMS 2.1 merge of VAE MDWS–VIA migration	L. Epuri	F. Kleinfelt		
11/29/2016	0.9	Updated for December 2016 Release, added section “CA SiteMinder Web Agent” installation	D.Horn			
11/2/2016	0.8	Updated document for Public VDA Portal, 508 compliance and removed real servernames and url addresses.	D.Horn			
8/5/2016	0.7	Updated document for BMS v2.0: Updates to Figure 1 Diagram, SQL Server version, ASP.NET, MVC.	D.Horn			8/12/2016

<b>Creation Date</b>	<b>Version No.</b>	<b>Description/Comments</b>	<b>Author(s)</b>	<b>Reviewer(s)</b>	<b>Review Type</b>	<b>Issue Date</b>
3/4/2016	0.6	Removed real URL and server addresses and replaced them with generic address names throughout the document	H. Gau			3/4/2016
7/15/2015	0.5	Final team review	P. O'Reilly, N. Morrison, H. Gau, A. Ray, B. Welkder, L. Harth			7/15/15
06/05/2015	0.5	Technical edit. Fix issues with table of tables and table of figures.	R. Wilder			06/30/2015
6/05/2015	0.5	Updated the following sections:  2.2 System Requirements  2.3 Configuration Parameters  2.4 Scheduled Windows and SQL Jobs Configuration  2.4.1 BMS Reports Full  2.4.2 BMS Incremental  2.4.3 BMS Reports WMI  2.5 Ward Whiteboard Kiosk Setup  2.6 Whiteboard Snapshot Configuration  2.7 EMS Mobile Device Configuration  2.9 NUMI Integration	P. O'Reilly, N. Morrison, H. Gau, A. Ray, B. Welkder, L. Harth			6/30/2015

<b>Creation Date</b>	<b>Version No.</b>	<b>Description/Comments</b>	<b>Author(s)</b>	<b>Reviewer(s)</b>	<b>Review Type</b>	<b>Issue Date</b>
		3.3 Database Architecture 3.4 Component Files 7 Software Security				
07/17/2013	0.4	Updated section 2.3 Configuration Parameters, updated section 2.5 Whiteboard Kiosk Mode, updated section 2.7 EMS Mobile Device Configuration, added Appendix 9.5,	S. Greenacre			07/19/2013
07/29/2013	0.3	Updated section 2.8.1.1 to include the MDWS Endpoint.	S. Greenacre			08/06/2013
10/07/2013	0.2	Updated section 2.2 with service account information, Renamed and Updated section 2.6.3, Added a note to section 2.6.4, added log files to section 8.	S. Greenacre			10/15/2013
06/12/2013	0.1	Initial baseline.	S. Greenacre			07/09/2013

## Table of Contents

<b>1</b>	<b>Introduction .....</b>	<b>11</b>
1.1	Purpose .....	11
1.2	BMS Overview.....	11
1.3	References .....	11
<b>2</b>	<b>Implementation and Maintenance.....</b>	<b>12</b>
2.1	BMS Infrastructure Diagram .....	12
2.2	System Requirements (Hardware and Software).....	13
2.3	Configuration Parameters.....	15
2.4	Scheduled Windows and SQL Jobs Configuration.....	116
2.4.1	BMS Reports Full.....	116
2.4.2	BMS Incremental .....	137
2.4.3	BMS Reports Windows Management Instrumentation (WMI).....	144
2.5	Ward Whiteboard Kiosk Mode Display Configuration (BMS Whiteboard Kiosk Setup) .....	145
2.5.1	Create the Ward Whiteboard Kiosk URL .....	147
2.5.2	Set up a default user for the BMS Kiosk .....	148
2.5.3	Set up the Workstation / Kiosk Machine .....	150
2.6	Whiteboard Snapshot Configuration .....	160
2.6.1	Create Snapshot Folder.....	160
2.6.2	Define Network Share.....	161
2.6.3	Assign Rights to Master BMS Service Account User .....	163
2.6.4	Assign Snapshot Folder Path to Ward Group .....	168
2.6.5	Associate Scheduler with Whiteboard Report .....	168
2.7	EMS Mobile Device Configuration .....	169
2.7.1	Configure EMS Mobile Device Default Login User.....	169
2.7.2	Configure EMS Mobile Device URL .....	171
2.8	VistA Integration .....	172
2.8.1	Choose VistA Site .....	172
2.8.2	Define Schedulers .....	173
2.8.3	Run Scheduler .....	174
2.8.4	View Audit Results .....	175
2.9	NUMI Integration .....	177
	Integration Settings.....	177
2.9.1	Choose VistA Site .....	178
2.9.2	Define Schedulers .....	178
2.9.3	Select Scheduler.....	178
<b>3</b>	<b>Application structure .....</b>	<b>179</b>
3.1	Application Components.....	179

3.2	Application Directory Structure .....	179
3.3	Database Architecture .....	180
3.4	Component Files .....	181
<b>4</b>	<b>Archiving.....</b>	<b>206</b>
<b>5</b>	<b>External Relationships .....</b>	<b>206</b>
<b>6</b>	<b>External Interfaces .....</b>	<b>207</b>
<b>7</b>	<b>Software Security.....</b>	<b>208</b>
7.1	Policy Manager.....	210
7.2	Operation Definitions .....	210
7.3	Task Definitions .....	221
7.4	Role Definitions .....	231
7.5	Assigning a Role to a User .....	233
7.6	Adding a New Role.....	234
7.7	Adding a New Task.....	236
7.8	Adding a New Operation .....	238
7.9	Business scenarios and use cases .....	239
<b>8</b>	<b>Detailed Functional Model on Each Interface.....</b>	<b>241</b>
8.1	Service contracts .....	241
	Data contracts .....	245
8.2	BMS Roles .....	245
<b>9</b>	<b>Troubleshooting .....</b>	<b>246</b>
<b>10</b>	<b>Appendix A – BMS Diagrams .....</b>	<b>250</b>
10.1	Business Process Diagrams.....	250
10.2	Activity Diagram .....	254
10.3	Functional Flow Diagram.....	256
<b>11</b>	<b>Appendix B - Terms, Acronyms, and Abbreviations.....</b>	<b>258</b>

## List of Tables

Table 1-Server for Web Applications .....	13
Table 2-Application Server.....	13
Table 3-Database Server .....	14
Table 4-BMS ServiceHost Configuration Parameters .....	15
Table 5-EIS Service Configuration Parameters .....	94
Table 6-EVS Service Configuration Parameters .....	97
Table 7-PAP Service Configuration Parameters.....	101
Table 8-PDP Service Configuration Parameters.....	104
Table 9-RS Service Configuration Parameters .....	105
Table 10-STS Service Configuration Parameters .....	106
Table 11-Win ServiceHost Configuration Parameters.....	109
Table 12-WMI User Group Configuration Parameters.....	110
Table 13-Policy Manager Configuration Parameters.....	110
Table 14-BMS Web Configuration Parameters .....	111
Table 15-Ward Whiteboard URL Configuration Parameters .....	147
Table 16-Facility Settings Page Parameters.....	170
Table 17-BMS Admin Page Parameters .....	171
Table 18-Description and Configuration for EMS Mobile Device URL Parameters .....	171
Table 19-New VistA Site Parameters .....	173
Table 20-New Scheduler Parameters.....	174
Table 21-View Aduit Results Columns Report .....	177
Table 22-BMS Database Files .....	181
Table 23-BMS Service Files .....	183
Table 24-WIN Service Host Files.....	187
Table 25-BMS Website Files.....	196
Table 26-Policy Manager Files .....	205
Table 27-BMS Operations .....	211
Table 28- BMS Tasks.....	223
Table 29-Terms, Acronyms, and Abbreviations .....	258

## List of Figures

Figure 1-BMS Infrastructure Diagram.....	12
Figure 2-BMS-Report Full Job.....	116
Figure 3-BMS-Start Full Job .....	117
Figure 4-BMS-Check State Job Incremental .....	118
Figure 5-BMS-Waits 1 Min for Incremental Job to stop .....	119
Figure 6-BMS-Check State Job Incremental .....	120
Figure 7-BMS-Job Step Properties .....	121
Figure 8- BMS- Job Step Properties-Call Stored Procedure.....	122
Figure 9- BMS-Job Step Properties-Call Stored Procedure_SP_Infoworld .....	123
Figure 10-BMS-Job Step Properties_BMS EVS .....	124
Figure 11-BMS- Job Step Procedures-VOCAB .....	125
Figure 12-BMS-Job Step Procedurs-ETL_Processfull_Facts.....	126
Figure 13- BMS- Copy User in history database .....	127
Figure 14- Clear DS data .....	128
Figure 15-BMS-Re-enable Incremental.....	129
Figure 16-On Fail Re-enable Incremental .....	130
Figure 17-BMS-Shrink .....	131
Figure 18-BMS-Clear Data.....	132
Figure 19- BMS-Call Procedure Full.....	133
Figure 20- Copy Users in History Database .....	134
Figure 21-BMS Reports Full Path File Log.....	135
Figure 22- Clear Data from DS.....	136
Figure 23-BMS Start Job and Send Email .....	137
Figure 24- BMS- Report Incremental Job.....	138
Figure 25-BMS-STart Job Incremental.....	139
Figure 26-BMS-Check State Job Full .....	140
Figure 27-BMS-Call Procedure Properties .....	141
Figure 28-BMS-Call Procedure Incremental_DW.....	142
Figure 29- BMS Incremental Path File Log.....	143
Figure 30- BMS-Call Procedure Recalculate Statistics .....	144
Figure 31- BMS Ward Whiteboard Screen.....	145
Figure 33-Facility Settings.....	149
Figure 33- Whiteboard Kiosk User Role Assignment .....	150
Figure 34- Screen Saver Option.....	151
Figure 35- Screen Saver Settings Window .....	152
Figure 36- Power Options .....	153
Figure 37- Change Plan Settings Option.....	153
Figure 38- Power Options Settings .....	154
Figure 39- Run Window .....	154
Figure 40- Run Window with Comman Entered .....	155
Figure 41- User Accounts Window .....	155
Figure 42- User Accounts .....	156
Figure 43- Tools Menu of Internet Explorer.....	157
Figure 44- General Tab of Internet Options.....	157
Figure 45- Open Option .....	158
Figure 46- Internet Explorer Shortcut.....	159

Figure 47-Windows Registry Editor .....	159
Figure 48- Whiteboard Snapshot Folder .....	161
Figure 49- Whiteboard Snapshot Folder Properties.....	161
Figure 50- Advanced Sharing Option .....	162
Figure 51- Share this Folder Option .....	162
Figure 52- Permissions for Whiteboard Snapshot .....	163
Figure 53-Select Users or Groups Window .....	163
Figure 54- Advanced Section of Select Users or Group Window .....	164
Figure 55- Search Result Section.....	165
Figure 56- Object Names Section .....	165
Figure 57- Permissions Window.....	166
Figure 58- User Permissions .....	167
Figure 59- Advanced Sharing Window .....	167
Figure 60- WardGroup1-PC Path .....	168
Figure 61-Contingency Settings Page.....	168
Figure 62- Whiteboard Report Scheduler Association .....	169
Figure 63- EMS Fields Filled on the Facility Settings Page .....	170
Figure 64-EMS Fields Filled on the BMS Admin Page .....	171
Figure 65-EMS Staff Page for Mobile Devices .....	172
Figure 66-Adding a Vista Site .....	173
Figure 67-Schedulers Tab .....	174
Figure 68-VistA Integration Tab .....	175
Figure 69- Aduit Tab .....	176
Figure 70- View Aduit Results .....	176
Figure 71-NUMI Tab.....	178
Figure 72- Selecting the VistA Site for NUMI data .....	179
Figure 73-Database Architecture .....	181
Figure 74-Backup Maintenance Plan.....	206
Figure 75-BMS Exnternal Interfaces .....	207
Figure 76-Security Services Architecture .....	209
Figure 77-Policy Manager Main Window .....	210
Figure 78-Operation Definition .....	211
Figure 79-Task Definition.....	222
Figure 80-Operations Defining a Task.....	223
Figure 81-Role Definition.....	232
Figure 82-Assigning Roles to Users .....	233
Figure 83-New Role Definition .....	234
Figure 84-Adding Tasks and Operations to a Role.....	235
Figure 85-Add Role to Role Assignments List.....	236
Figure 86-New Task Definition .....	237
Figure 87-Adding Operations to a Task.....	238
Figure 88-New Operation Definition .....	238
Figure 89-Authentication Use Cases.....	239
Figure 90-Authorization Use Cases .....	239
Figure 91- Authorization Administration Use Cases .....	240
Figure 92-Class Diagram for Data Contracts in PAP and PDP .....	245
Figure 93-500 Server Error.....	246
Figure 94-No Facilities Error.....	247

Figure 95-Unhandled Exception .....	247
Figure 96-Login Unsuccessful .....	248
Figure 97- EMS Bed Status Report is Missing .....	249
Figure 98- Report Cannot be Found .....	249
Figure 99-Admit Patient to PPBP Business Proces .....	250
Figure 100-Transfer Patients to PPBP Business Process .....	251
Figure 101-Display and Update PPBP Business Process .....	251
Figure 102-Display and Update Bed Status Business Process.....	252
Figure 103-Manage Bed Cleaning Business Process.....	252
Figure 104-Create Notification Business Process.....	253
Figure 105-Create Facility Diversion Business Process .....	253
Figure 106-Manage Whiteboard Business Process.....	254
Figure 107-Reports Business Process .....	254
Figure 108-BMS Overview Activity Diagram.....	255
Figure 109-BMS Overview Functional Flow Diagram .....	256
Figure 110-BMS Overview Data Flow Diagram .....	257
Figure 111-Application Flow map from APPDYNAMICS.....	258

# **1 Introduction**

## **1.1 Purpose**

This document is designed to provide sufficient technical information about the Bed Management Solution (BMS) application to the developers and Information Resources Management (IRM) technical personnel to operate and maintain the software.

## **1.2 BMS Overview**

BMS is a real-time, user-friendly Web-based Veterans Health Information Systems and Technology Architecture (VistA) interface for tracking patient movement, bed status and bed availability. It provides performance information that can be used to improve patient flow within, and between, VA Medical Centers (VAMCs).

BMS allows administrative and clinical staff to record, manage and report on the planning, patient-movement, patient occupancy, and other activities related to management of beds. All patient admission, discharge, and transfer movements are sent directly from VistA to BMS.

BMS offers the following features:

- Tracks patient movement through the system;
- Displays patient and bed occupancy status for all beds in the facility and/or Veterans Integrated Service Networks (VISN);
- Provides visibility of bed availability within VAMC's to support emergency management;
- Automates request and assignment of beds;
- Displays and facilitates timely discharge appointments;
- Supports and facilitates efficient flow operations and is a catalyst to process improvement and best practices;
- Provides reports on performance measures associated with bed management and patient flow.

BMS provides answers to the following questions:

- How many beds do we have?
- How many empty beds do we have?
- How many available female beds do we have?
- How many beds are out of service and why?
- How long does it take to clean a bed?
- How many patients are waiting for beds in community hospitals?
- How many admissions, transfers, and discharges did my unit have yesterday?
- How many discharges will we have tomorrow?
- How many scheduled admissions do we have for today?

## **1.3 References**


Requirements Specification Document (CLIN: 0002AA; title: Requirements Specification Document; file: Bed Management Solution (BMS)  
Technical Manual

## 2 Implementation and Maintenance

### 2.1 BMS Infrastructure Diagram

The BMS application has a list of physical components that can be divided on more physical servers according with their roles.

The following diagram represents a possible schema of physical deployment.

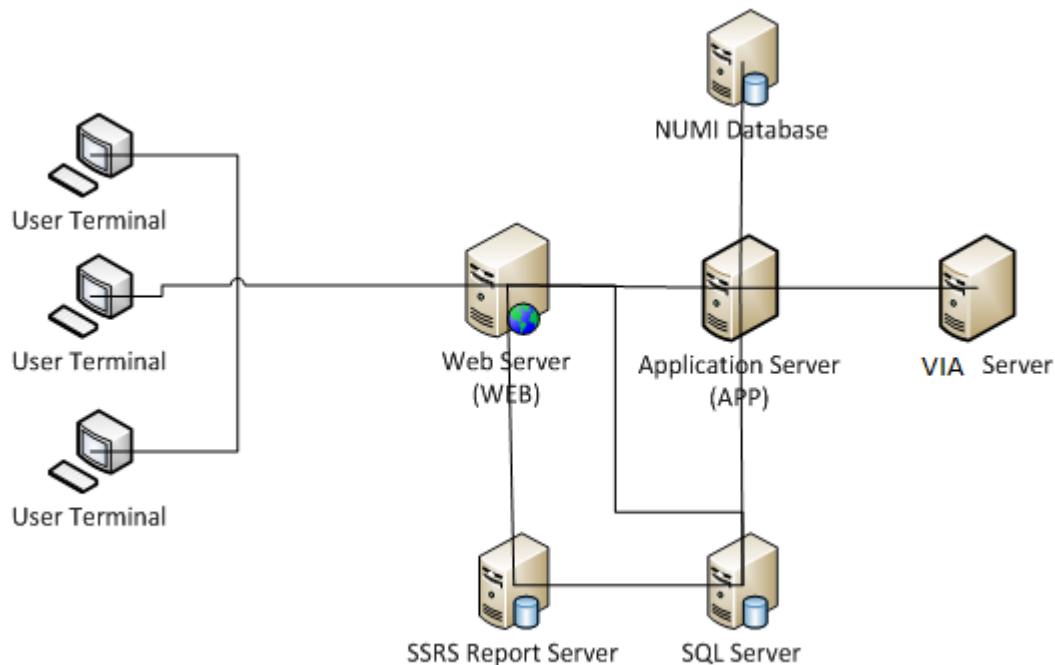

**Figure 1-BMS Infrastructure Diagram**

BMS is divided into specific components:

1. Persistence layer: SQL Server 2016 Enterprise database
2. Application server layer: Windows Communication Foundation (WCF) Web Services installed as Windows Services
3. Web server layer: Active Server Pages (ASP) .NET Model-View-Controller (MVC) Web application hosted in Internet Information Services (IIS)
4. Data Exchange Servers:
  - a. National Utilization Management Integration (NUMI) SQL Server Database
  - b. VistA integration servers (servers that have access to VistA)

5. Client Layer: Web Application client launched from browsers

## 2.2 System Requirements (Hardware and Software)

BMS requires the creation of a Master Windows Service Account User and numerous facility/Site Service Account Users for execution and operations.

All the BMS Application Services run under a service account.

- AITC has created the Windows User (acc\VAAACBMSPrd) as the master service account that the four BMS Services runs under. This can be referred to as the Master BMS Service Account.
- The <SERVERADDRESS>210 server hosts the three application services:
  - BMS.BedManagerService
  - BMS.SecurityHost
  - BMS.ServiceHost
- The <ServerAddress>211 server hosts the two application services:
  - BMS.VI.ServiceHost.
  - BMS.ServiceHost

All BMS Facilities/Sites require at least one service account for certain site functionality.

- This service account will run the EMS Mobile Page and Whiteboard Kiosk Page functions.
- Under BMS version 1.xx a single service account can be used for both functions.
- The service account that runs the EMS Mobile Page and Whiteboard Kiosk Page functions must not have any Policies assigned that restrict its use to specific computers.

BMS minimum hardware and software requirements are presented below:

**Table 1-Server for Web Applications**

Basic software:	Microsoft Windows Server 2012 64 bit R2 Standard Microsoft Clustering Services 2008 IIS 7.5 ASP.NET MVC5 .NET Framework 4.6.1
Application software:	Dashboards web application
Processor(s):	16 x Intel Xeon E5520 or equivalent
Memory:	32 GB
Hard disks:	190 GB
Network controller:	Broadcom NetXtreme Gigabit Ethernet, or equivalent

**Table 2-Application Server**

Server 1	
<b>Basic software:</b>	Microsoft Windows Server 2012 64 bit R2 Standard .NET Framework 4.6.1
<b>Application software:</b>	EIS, EVS, DS, BMS InFlow

<b>Processor(s):</b>	14 x Intel Xeon E5520 or equivalent
<b>Memory:</b>	65 GB
<b>Hard disks:</b>	190 GB
<b>Network controller:</b>	Broadcom NetXtreme Gigabit Ethernet, or equivalent
<b>Server 2</b>	
<b>Basic software:</b>	Microsoft Windows Server 2012 64 bit R2 Standard .NET Framework 4.6.1
<b>Application software:</b>	EIS, EVS, DS, BMS InFlow
<b>Processor(s):</b>	12 x Intel Xeon E5520 or equivalent
<b>Memory:</b>	65 GB
<b>Hard disks:</b>	210 GB
<b>Network controller:</b>	Broadcom NetXtreme Gigabit Ethernet, or equivalent

**Table 3-Database Server**

<b>Basic software:</b>	Microsoft Windows Server 2012 64 bit R2 Standard Microsoft SQL Server 2016 Enterprise .NET Framework 4.6.1
<b>Application software:</b>	Databases used by the services installed on APP
<b>Processor(s):</b>	32 x Intel Xeon E5520 or equivalent
<b>Memory:</b>	136 GB
<b>Hard disks:</b>	1500 GB
<b>Network controller:</b>	Broadcom NetXtreme Gigabit Ethernet, or equivalent

## 2.3 Configuration Parameters

This section describes configuration parameters of the BMS application.

**Table 4-BMS ServiceHost Configuration Parameters**

Section	Configuration Key/Name	Configuration values (ex.)			Descript ion
		Split Service			Combine Service
		BMS.ServiceHost.config	BMS.VI.ServiceHost.exe.config	BMS.ServiceHost.config	
<b>configSections</b>	mtmodules	type="ePractice.MiddleTier.MTModuleSectionHandler, MiddleTier"			
	enterpriselibrary.configurationSettings	type="ePractice.Configuration.ConfigurationManagerSectionHandler, MS.Configuration"			
	pagingSortGroup	type="BMS.Utils.PagingSortSection, BMS.Utils" allowDefinition="Everywhere" allowExeDefinition="MachineToApplication" restartOnExternalChanges="true"			
	log4net	type="log4net.Config.Log4NetConfigurationSectionHandler,log4net"			
<b>connectionStrings</b>	Authorization	connectionString="Data Source=<DatabaseAddress>;Network Library=DBMSSOCN;Initial Catalog=BMS;Persist Security Info=False;Integrated Security=SSPI;Pooling=true;Min Pool Size=0;Max Pool Size=250;"	connectionString="Data Source=<DatabaseAddress>;Network Library=DBMSSOCN;Initial Catalog=BMS;Persist Security Info=False;Integrated Security=SSPI;Pooling=true;Min Pool Size=0;Max Pool Size=250;"	connectionString="Data Source=<DatabaseAddress>;Initial Catalog=BMS;Persist Security Info=False;Integrated Security=SSPI;Pooling=true;Min Pool Size=0;Max Pool Size=100;"	Connec tion strin g for the conn ectio n to the BMS data base .
<b>appSettings</b>	DatasetPath	value="DBRepository"			
	LocalServer	value="yes"			
	UseSecurityContext	value="1"			
	ePractice.MiddleTier.Transaction	value="MiddleTier.dll"			
	ConnectionRef	value="1"			

Section	Configuration Key/Name	Configuration values (ex.)			Description
		Split Service		Combine Service	
		BMS.ServiceHost.config	BMS.VI.ServiceHost.exe.config	BMS.ServiceHost.config	
	TransactionProvider	value="ePractice.MiddleTier.CustomTransactionProvider"			
	VistaWorker.WorkerDelay TimeSpan	value="0:0:0:30"			Delay time from service start to first processing
	VistaWorker.WorkerPeriod TimeSpan	value="0:0:0:15"			Period between worker processing steps
	VistaWorker.BulkSize	value="100"			Maximum number of processed entities in one step
	VistaWorker.Enabled	N/A (No longer used)			Whether vista

Section	Configuration Key/Name	Configuration values (ex.)			Description
		Split Service		Combine Service	
		BMS.ServiceHost.config	BMS.VI.ServiceHost.exe.config	BMS.ServiceHost.config	
					worker is enabled or not (true or false)
	VistaIntegration.Enabled	value="false"	value="true"	value="true"	Whether vista integration is enabled or not (true or false)
	VistaIntegration.SchedulerSecondsLate	value="30"			The time delay of schedulers
	VistaIntegration.UpdateBmsPatients	value="true"			Whether update bms patients is enabled

Section	Configuration Key/Name	Configuration values (ex.)			Description	
		Split Service			Combine Service	
		BMS.ServiceHost.config	BMS.VI.ServiceHost.exe.config	BMS.ServiceHost.config		
	SmtpHost	value="smtp.va.gov"	value="smtp.va.gov"	value="localhost"	smtp host	
	VistaWorker.VistASitesFilePath	value="VistASites.xml"				
	VistasBedHoldSupported	N/A				
	visitorAppPwd	value="UM"				

Section	Configuration Key/Name	Configuration values (ex.)		Description
		Split Service		Combine Service
		BMS.ServiceHost.config	BMS.VI.ServiceHost.exe.config	BMS.ServiceHost.config
	visitorUserSiteCode	value="523"		
	visitorUserName	< visitorUserName >		
	visitorUserDuz	value="<visitorUserDuz >"		

Section	Configuration Key/Name	Configuration values (ex.)		Description
		Split Service		Combine Service
		BMS.ServiceHost.config	BMS.VI.ServiceHost.exe.config	BMS.ServiceHost.config
	visitorUserSsn	value="<visitorUserSsn >"		
	visitorContext	value="<visitorContext >"		
	UsingNewMdwsMethods	value="true"		

Section	Configuration Key/Name	Configuration values (ex.)		Description
		Split Service		Combine Service
		BMS.ServiceHost.config	BMS.VI.ServiceHost.exe.config	BMS.ServiceHost.config
	BMS_EIS_GET_ENTITY_FILTR_PAGE_SIZE	value="1000"		false ) Number of records queried that are brought from EIS in one page .
	BMS_EVS_GET_CONCEPT_PAGE_SIZE	value="1000"		Number of records queried that are brought from EVS in one page .
	Changeset	value="72898"		Changeset of

Section	Configuration Key/Name	Configuration values (ex.)			Description
		Split Service		Combine Service	
		BMS.ServiceHost.config	BMS.VI.ServiceHost.exe.config	BMS.ServiceHost.config	
					the installed build.
	NumiSvcAuthenticationKey	value=<NumiSvcAuthenticationKey > "			NUMI service authentication key.
	NumiMaxNumberOfSitesPerCall	value="5"			Maximum number of sites that NUMI processes in one call.
	Is_IIS_Single_Instance	value="true"			Whether use SSL endpoint from configuration file. (true)

Section	Configuration Key/Name	Configuration values (ex.)			Description
		Split Service			Combine Service
		BMS.ServiceHost.config		BMS.VI.ServiceHost.exe.config	BMS.ServiceHost.config
					or false )
	UseCacheEndpointFromConfigWithSsl	value="true"			Whether use SSL endpoint from configuration file.
	ProxyPoolMaxCount	value="1000"	value="50"	value="1000"	The maximum number of proxies in the pool.
	VistalIntegrationJobFailedMaxCount	value="25"	<add key="MdwsEndpointUrl_DFLT" value="http://vaausbmsweb2:87/QuerySvc.asmx"/><add key="MdwsEndpointUrl_R1" value="http://vaausbmsweb2:88/QuerySvc.asmx"/><add key="MdwsEndpointUrl_R2" value="http://vaausbmsweb2:89/QuerySvc.asmx"/><add key="MdwsEndpointUrl_R3"	value="http://localhost:82/QuerySvc.asmx" value="http://localhost:82/QuerySvc.asmx"	MD WS instance URL address.

Section	Configuration Key/Name	Configuration values (ex.)			Description
		Split Service		Combine Service	
		BMS.ServiceHost.config		BMS.VI.ServiceHost.exe.config	BMS.ServiceHost.config
			<pre> value="http://vaausbmsweb2 6:90/QuerySvc.asmx"/&gt; &lt;add key="MdwsEndpointUrl_R4" value="http://vaausbmsweb2 6:91/QuerySvc.asmx"/&gt; &lt;add key="MdwsEndpointUrl_V1" value="http://vaausbmsweb2 6:92/QuerySvc.asmx"/&gt; &lt;add key="MdwsEndpointUrl_V2" value="http://vaausbmsweb2 6:93/QuerySvc.asmx"/&gt; &lt;add key="MdwsEndpointUrl_V3" value="http://vaausbmsweb2 6:94/QuerySvc.asmx"/&gt; &lt;add key="MdwsEndpointUrl_V4" value="http://vaausbmsweb2 6:95/QuerySvc.asmx"/&gt; &lt;add key="MdwsEndpointUrl_V5" value="http://vaausbmsweb2 6:96/QuerySvc.asmx"/&gt; &lt;add key="MdwsEndpointUrl_V6" value="http://vaausbmsweb2 6:97/QuerySvc.asmx"/&gt; &lt;add key="MdwsEndpointUrl_V7" value="http://vaausbmsweb2 6:98/QuerySvc.asmx"/&gt; &lt;add key="MdwsEndpointUrl_V8" value="http://vaausbmsweb2 6:99/QuerySvc.asmx"/&gt; &lt;add </pre>		

Section	Configuration Key/Name	Configuration values (ex.)			Description
		Split Service		Combine Service	
		BMS.ServiceHost.config	BMS.VI.ServiceHost.exe.config	BMS.ServiceHost.config	
			<pre> key="MdwsEndpointUrl_V9" value="http://vaausbmsweb2 6:100/QuerySvc.asmx"/&gt; &lt;add key="MdwsEndpointUrl_V10" value="http://vaausbmsweb2 6:101/QuerySvc.asmx"/&gt; &lt;add key="MdwsEndpointUrl_V11" value="http://vaausbmsweb2 6:102/QuerySvc.asmx"/&gt; &lt;add key="MdwsEndpointUrl_V12" value="http://vaausbmsweb2 6:103/QuerySvc.asmx"/&gt; &lt;add key="MdwsEndpointUrl_V13" value="http://vaausbmsweb2 6:104/QuerySvc.asmx"/&gt; &lt;add key="MdwsEndpointUrl_V14" value="http://vaausbmsweb2 6:105/QuerySvc.asmx"/&gt; &lt;add key="MdwsEndpointUrl_V15" value="http://vaausbmsweb2 6:106/QuerySvc.asmx"/&gt; &lt;add key="MdwsEndpointUrl_V16" value="http://vaausbmsweb2 6:107/QuerySvc.asmx"/&gt; &lt;add key="MdwsEndpointUrl_V17" value="http://vaausbmsweb2 6:108/QuerySvc.asmx"/&gt; &lt;add key="MdwsEndpointUrl_V18" value="http://vaausbmsweb2 6:109/QuerySvc.asmx"/&gt;</pre>		

Section	Configuration Key/Name	Configuration values (ex.)			Description
		Split Service		Combine Service	
		BMS.ServiceHost.config		BMS.VI.ServiceHost.exe.config	BMS.ServiceHost.config
			<add key="MdwsEndpointUrl_V19" value="http://vaausbmsweb2 6:110/QuerySvc.asmx"/> <add key="MdwsEndpointUrl_V20" value="http://vaausbmsweb2 6:111/QuerySvc.asmx"/> <add key="MdwsEndpointUrl_V21" value="http://vaausbmsweb2 6:112/QuerySvc.asmx"/> <add key="MdwsEndpointUrl_V22" value="http://vaausbmsweb2 6:113/QuerySvc.asmx"/> <add key="MdwsEndpointUrl_V23" value="http://vaausbmsweb2 6:114/QuerySvc.asmx"/> <add key="MdwsEndpointUrl_GLA " value="http://vaausbmsweb2 6:115/QuerySvc.asmx"/> <add key="MdwsEndpointUrl_LAS " value="http://vaausbmsweb2 6:116/QuerySvc.asmx"/> <add key="MdwsEndpointUrl_LOM " value="http://vaausbmsweb2 6:117/QuerySvc.asmx"/> <add key="MdwsEndpointUrl_LON " value="http://vaausbmsweb2		

Section	Configuration Key/Name	Configuration values (ex.)			Description
		Split Service		Combine Service	
		BMS.ServiceHost.config	BMS.VI.ServiceHost.exe.config	BMS.ServiceHost.config	
			<pre> 6:118/QuerySvc.asmx"/&gt; &lt;add key="MdwsEndpointUrl_SDC" " value="http://vaausbmsweb2 6:119/QuerySvc.asmx"/&gt; &lt;add key="MdwsEndpointUrl_KAN" " value="http://vaausbmsweb2 6:120/QuerySvc.asmx"/&gt; &lt;add key="MdwsEndpointUrl_STL" " value="http://vaausbmsweb2 6:121/QuerySvc.asmx"/&gt; &lt;add key="MdwsEndpointUrl_NFL" " value="http://vaausbmsweb2 6:122/QuerySvc.asmx"/&gt; &lt;add key="MdwsEndpointUrl_WP B" value="http://vaausbmsweb2 6:123/QuerySvc.asmx"/&gt; &lt;add key="MdwsEndpointUrl_BAY" " value="http://vaausbmsweb2 6:124/QuerySvc.asmx"/&gt; &lt;add key="MdwsEndpointUrl_MIA" value="http://vaausbmsweb2 6:125/QuerySvc.asmx"/&gt; &lt;add key="MdwsEndpointUrl_ORL" " value="http://vaausbmsweb2 6:126/QuerySvc.asmx"/&gt; </pre>		

Section	Configuration Key/Name	Configuration values (ex.)			Description
		Split Service		Combine Service	
		BMS.ServiceHost.config	BMS.VI.ServiceHost.exe.config	BMS.ServiceHost.config	
			<pre> 6:126/QuerySvc.asmx"/&gt; &lt;add key="MdwsEndpointUrl_SAJ" value="http://vaausbmsweb2 6:127/QuerySvc.asmx"/&gt; &lt;add key="MdwsEndpointUrl_TAM" value="http://vaausbmsweb2 6:128/QuerySvc.asmx"/&gt; &lt;add key="MdwsEndpointUrl_RSV1" value="http://vaausbmsweb2 7:87/QuerySvc.asmx"/&gt; &lt;add key="MdwsEndpointUrl_RSV2" value="http://vaausbmsweb2 7:88/QuerySvc.asmx"/&gt; &lt;add key="MdwsEndpointUrl_RSV3" value="http://vaausbmsweb2 7:89/QuerySvc.asmx"/&gt; &lt;add key="MdwsEndpointUrl_RSV4" value="http://vaausbmsweb2 7:90/QuerySvc.asmx"/&gt; &lt;add key="MdwsEndpointUrl_RSV5" value="http://vaausbmsweb2 7:91/QuerySvc.asmx"/&gt; &lt;add key="MdwsEndpointUrl_RSV6" </pre>		



Section	Configuration Key/Name	Configuration values (ex.)			Description
		Split Service		Combine Service	
		BMS.ServiceHost.config	BMS.VI.ServiceHost.exe.config	BMS.ServiceHost.config	
			<pre> 14" value="http://vaausbmsweb2 7:100/QuerySvc.asmx"/&gt; &lt;add key="MdwsEndpointUrl_RSV 14" value="http://vaausbmsweb2 7:101/QuerySvc.asmx"/&gt; &lt;add key="MdwsEndpointUrl_RSV 15" value="http://vaausbmsweb2 7:102/QuerySvc.asmx"/&gt; &lt;add key="MdwsEndpointUrl_RSV 16" value="http://vaausbmsweb2 7:103/QuerySvc.asmx"/&gt; &lt;add key="MdwsEndpointUrl_RSV 17" value="http://vaausbmsweb2 7:104/QuerySvc.asmx"/&gt; &lt;add key="MdwsEndpointUrl_RSV 18" value="http://vaausbmsweb2 7:105/QuerySvc.asmx"/&gt; &lt;add key="MdwsEndpointUrl_RSV 19" value="http://vaausbmsweb2 7:106/QuerySvc.asmx"/&gt; &lt;add key="MdwsEndpointUrl_RSV 20" value="http://vaausbmsweb2 7:107/QuerySvc.asmx"/&gt; &lt;add </pre>		

Section	Configuration Key/Name	Configuration values (ex.)			Description
		Split Service		Combine Service	
		BMS.ServiceHost.config	BMS.VI.ServiceHost.exe.config	BMS.ServiceHost.config	
			<pre> key="MdwsEndpointUrl_RSV 21" value="http://vaausbmsweb2 7:108/QuerySvc.asmx"/&gt; &lt;add key="MdwsEndpointUrl_RSV 22" value="http://vaausbmsweb2 7:109/QuerySvc.asmx"/&gt; &lt;add key="MdwsEndpointUrl_RSV 23" value="http://vaausbmsweb2 7:110/QuerySvc.asmx"/&gt; &lt;add key="MdwsEndpointUrl_RSV 24" value="http://vaausbmsweb2 7:111/QuerySvc.asmx"/&gt; &lt;add key="MdwsEndpointUrl_RSV 25" value="http://vaausbmsweb2 7:112/QuerySvc.asmx"/&gt; &lt;add key="MdwsEndpointUrl_RSV 26" value="http://vaausbmsweb2 7:113/QuerySvc.asmx"/&gt; &lt;add key="MdwsEndpointUrl_RSV 27" value="http://vaausbmsweb2 7:114/QuerySvc.asmx"/&gt; &lt;add key="MdwsEndpointUrl_GLA 27" value="http://vaausbmsweb2 7:115/QuerySvc.asmx"/&gt;</pre>		

Section	Configuration Key/Name	Configuration values (ex.)			Description
		Split Service		Combine Service	
		BMS.ServiceHost.config		BMS.VI.ServiceHost.exe.config	BMS.ServiceHost.config
			<add key="MdwsEndpointUrl_LAS 27" value="http://vaausbmsweb2 7:116/QuerySvc.asmx"/> <add key="MdwsEndpointUrl_LOM 27" value="http://vaausbmsweb2 7:117/QuerySvc.asmx"/> <add key="MdwsEndpointUrl_LON 27" value="http://vaausbmsweb2 7:118/QuerySvc.asmx"/> <add key="MdwsEndpointUrl_SDC 27" value="http://vaausbmsweb2 7:119/QuerySvc.asmx"/> <add key="MdwsEndpointUrl_KAN 27" value="http://vaausbmsweb2 7:120/QuerySvc.asmx"/> <add key="MdwsEndpointUrl_STL 27" value="http://vaausbmsweb2 7:121/QuerySvc.asmx"/> <add key="MdwsEndpointUrl_NFL 27" value="http://vaausbmsweb2 7:122/QuerySvc.asmx"/> <add key="MdwsEndpointUrl_WP B27" value="http://vaausbmsweb2		

Section	Configuration Key/Name	Configuration values (ex.)			Description
		Split Service		Combine Service	
		BMS.ServiceHost.config		BMS.VI.ServiceHost.exe.config	BMS.ServiceHost.config
			7:123/QuerySvc.asmx"/> <add key="MdwsEndpointUrl_BAY 27" value="http://vaausbmsweb2 7:124/QuerySvc.asmx"/> <add key="MdwsEndpointUrl_MIA 27" value="http://vaausbmsweb2 7:125/QuerySvc.asmx"/> <add key="MdwsEndpointUrl_ORL 27" value="http://vaausbmsweb2 7:126/QuerySvc.asmx"/> <add key="MdwsEndpointUrl_SAJ 27" value="http://vaausbmsweb2 7:127/QuerySvc.asmx"/> <add key="MdwsEndpointUrl_TAM 27" value="http://vaausbmsweb2 7:128/QuerySvc.asmx"/>		
	VistaIntegrationJobFailedIncrementDateMinutes	value="10"			The maximum number of job failures until the system

Section	Configuration Key/Name	Configuration values (ex.)		Description
		Split Service		Combine Service
		BMS.ServiceHost.config	BMS.VI.ServiceHost.exe.config	BMS.ServiceHost.config
	VistaIntegrationJobFailedNotificationEmailTo			The time span (minutes) that the system decides to increment job's start date when the threshold of job failures is reached.
	VistaIntegrationJobFailedNotificationEmailFrom	value="BMSBackgroundProcessorAgent@va.gov"		Recipient's email used when a

Section	Configuration Key/Name	Configuration values (ex.)			Description
		Split Service		Combine Service	
		BMS.ServiceHost.config		BMS.VI.ServiceHost.exe.config	BMS.ServiceHost.config
					job fails. (va_pers on@va.gov)
	BMS_EIS_LongRunningMethodsMaxConcurrentCalls	value="100"			Sender's email used when a job fails.
	BMS_EVS_LongRunningMethodsMaxConcurrentCalls	value="100"	value="75"	value="75"	
	BMSServiceHostStartType	value="BMS"	value="100"	value="50"	
	VistaIntegration.TaskSchedulerDelayMin	value="0"	value="BMS.VI"	value="ALL"	Identifies how BMS is ran and the associate configuration file. (possible value)

Section	Configuration Key/Name	Configuration values (ex.)			Description
		Split Service		Combine Service	
		BMS.ServiceHost.config		BMS.VI.ServiceHost.exe.config	BMS.ServiceHost.config
	VistaIntegration.TaskSchedulerDelayMax	value="10"	value="0"	value="0"	es: ALL, BMS , BMS .VI)
	VistaIntegration.TaskSchedulerDelayStep	value="5"	value="10"	value="10"	
	ThreadPoolMaxWorkerThreads		value="5"	value="5"	
	VistaIntegration.PatientMovementlenDays			value="200"	
	ViaEndpointUrl		value="60"	value="60"	
	ViaRequestingApp		value="https://vaww.bms.via.va.gov/via-webservices/services/BackgroundProcessService"	value="https://vaww.bms.via.va.gov/via-webservices/services/BackgroundProcessService"	URL for VIA
	ViaAppToken		value="BMSBatch"	value="BMSBatch"	
	ViaAppPassword		value="BMSB_ID577"	value="BMSB_ID577"	
	MinimumFilemanDate		value="*****"	Value="*****"	
			Value="01/01/1992"	Value="01/01/1992"	
pagingSortGroup\pagingSort	sortColumnCode="entered"	sortColumnName="[A].[CREATION_DATE]"			
	sortColumnCode="patient"	sortColumnName="[PAT].[LAST_NAME], [PAT].[FIRST_NAME]"			
	sortColumnCode="facility"	sortColumnName="[F].[NAME]"			
	sortColumnCode="requestdt"	sortColumnName="[A].[CREATION_DATE]"			
	sortColumnCode="specialty"	sortColumnName="[REQSP].[DISPLAY_NAME]"			
	sortColumnCode="visn"	sortColumnName="[TR].[FACILITY_VISN]"			
	sortColumnCode="region"	sortColumnName="[TR].[FACILITY_REGION]"			
	sortColumnCode="eventdt"	sortColumnName="[AEVN].[CREATION_DATE]"			

Section	Configuration Key/Name	Configuration values (ex.)			Description
		Split Service		Combine Service	
		BMS.ServiceHost.config		BMS.VI.ServiceHost.exe.config	BMS.ServiceHost.config
<b>mtmodules [defaultserver=""]</b>	"				
	sortColumnCode="Vacate dDate"	sortColumnCode="VacatedDate"			
	sortColumnCode="transfer eventdt"	sortColumnName="[A].[CREATION_DATE]"			
	sortColumnCode="transfer requestdt"	sortColumnName="[TR].[REQUESTED_DATE]"			
	assembly="General.MT.dll "	servername=""			
<b>enterpriselibrary.configuration Settings</b> <b>xmlns:xsd="http://www.w3.org/2001/XMLSchema"</b> <b>xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"</b> <b>applicationName="HMSI"</b> <b>xmlns="http://www.microsoft.com/practices/enterpriselibrary/0</b>	assembly="BMS.MT.dll"	servername=""			
	configurationSections\configurationSection xsi:type="ReadOnlyConfigurationSectionData" name="securityConfiguration" encrypt="false"	storageProvider xsi:type="XmlFileStorageProviderData" name="XML File Storage Provider" path="securityConfiguration.config"			
	configurationSections\configurationSection xsi:type="ReadOnlyConfigurationSectionData" name="securityConfiguration" encrypt="false" configurationSections\configurationSection xsi:type="ReadOnlyConfigurationSectionData" name="cachingConfiguration" encrypt="false"	<dataTransformer xsi:type="XmlSerializerTransformerData" name="Xml Serializer Transformer"> <includeTypes> <includeType name="HMUserAccessAuthenticationProviderData" type="ePractice.Security.HMUserAccess.Configuration.HMUserAccessAuthenticationProviderData, Security.HMUserAccess"/> <includeType name="HMUserAccessAuthorizationProviderData" type="ePractice.Security.HMUserAccess.Configuration.HMUserAccessAuthorizationProviderData, Security.HMUserAccess"/> <includeType name="HMUserAccessRolesProviderData" type="ePractice.Security.HMUserAccess.Configuration.HMUserAccessRolesProviderData, Security.HMUserAccess"/> <includeType name="NullAuthenticationProviderData" type="ePractice.Security.Null.Configuration.NullAuthenticationProviderData, Security.Null"/> <includeType name="NullAuthorizationProviderData" type="ePractice.Security.Null.Configuration.NullAuthorizationProviderData, Security.Null"/> </includeTypes> </dataTransformer>			

Section	Configuration Key/Name	Configuration values (ex.)			Description
		Split Service		Combine Service	
		BMS.ServiceHost.config	BMS.VI.ServiceHost.exe.config	BMS.ServiceHost.config	
8-31-2004/configuration		storageProvider xsi:type="XmlFileStorageProviderData" name="XML File Storage Provider" path="cachingConfiguration.config"			
	configurationSections\configurationSection xsi:type="ReadOnlyConfigurationSectionData" name="cachingConfiguration" encrypt="false" configurationSections\configurationSection xsi:type="ReadOnlyConfigurationSectionData" name="connectionConfiguration" encrypt="false"	<pre>&lt;dataTransformer xsi:type="XmlSerializerTransformerData" name="Xml Serializer Transformer"&gt; &lt;includeTypes/&gt; &lt;/dataTransformer&gt;</pre> <pre>storageProvider xsi:type="XmlFileStorageProviderData" name="XML File Storage Provider" path="connectionConfiguration.config"</pre>			

Section	Configuration Key/Name	Configuration values (ex.)			Description	
		Split Service		Combine Service		
		BMS.ServiceHost.config	BMS.VI.ServiceHost.exe.config	BMS.ServiceHost.config		
<b>configurationSections\configurationSection</b> xsi:type="ReadOnlyConfigurationSectionData" name="connectionConfiguration" encrypt="false" keyAlgorithmStorageProvider		<dataTransformer xsi:type="XmlSerializerTransformerData" name="Xml Serializer Transformer"> <includeTypes> <includeType name="ServicesDatabaseConnectionProviderData" type="ePractice.Connection.SingleDatabase.Configuration.ServicesDatabaseConnectionProviderData, Connections.SingleDatabase, Version=1.0.0.0, Culture=neutral, PublicKeyToken=null"/> </includeTypes> </dataTransformer>			Connection configuration is for SERVER	
	xsi:nil="true"					
	application\channels\channel	type="System.Runtime.Remoting.Channels.Tcp.TcpChannel, System.Runtime.Remoting, Version=1.0.5000.0, Culture=neutral, PublicKeyToken=b77a5c561934e089" name="RegularChannel"				
<b>system.runtime.remoting</b>	connectionManagement\add	address="*" maxconnection="1000"				
<b>system.net</b>	service	name="BMS.ServiceImplementation.BedManagerOperationsCore" behaviorConfiguration="ServiceBehavior"				
<b>system.serviceModel\services</b>	host\base\baseAddresses\add	baseAddress="http://<ServerAddress>25:16050/BMSOperations"				
	endpoint	address="" bindingConfiguration="ServiceBinding" binding="wsFederationHttpBinding" contract="BMS.ServiceContracts.IBedManagerOperations"	baseAddress="http://<Server Address>211:16050/BMSOperations"	baseAddress="http://localhost:16050/BMSOperations"		
	endpoint	address="win" bindingConfiguration="WinBinding" binding="wsFederationHttpBinding" contract="BMS.ServiceContracts.IBedManagerOperations"				
	endpoint	contract="IMetadataExchange" binding="mexHttpBinding" address="mex"				
	endpoint	address="unsec" binding="basicHttpBinding" contract="BMS.ServiceContracts.IBedManagerOperations"				
	service	name="BMS.ServiceImplementation.BedManagerQueryCore" behaviorConfiguration="ServiceBehavior"				

Section	Configuration Key/Name	Configuration values (ex.)				Description
		Split Service			Combine Service	
		BMS.ServiceHost.config	BMS.VI.ServiceHost.exe.config	BMS.ServiceHost.config		
	host\base\baseAddresses\add	baseAddress="http://<ServerAddress>210:16050/BMSQuery"				
	endpoint	address="" bindingConfiguration="ServiceBinding" binding="wsFederationHttpBinding" contract="BMS.ServiceContracts.IBedManagerQuery"	baseAddress="http://<Server Address>211:16050/BMSQuery"	baseAddress="http://localhost:16050/BMSQuery"		
	endpoint	address="win" bindingConfiguration="WinBinding" binding="wsFederationHttpBinding" contract="BMS.ServiceContracts.IBedManagerQuery"				
	endpoint	contract="IMetadataExchange" binding="mexHttpBinding" address="mex"				
	endpoint	address="unsec" binding="basicHttpBinding" contract="BMS.ServiceContracts.IBedManagerQuery"				
	service	name="BMS.ServiceImplementation.BedManagerCacheCore" behaviorConfiguration="ServiceBehavior"				
	host\base\baseAddresses\add					
	endpoint		baseAddress="http://<Server Address>211:16050/BMSCache"	baseAddress="http://localhost:16050/BMSCache"		
	endpoint		address="" bindingConfiguration="ServiceBinding" binding="wsFederationHttpBinding" contract="BMS.ServiceContracts.IBedManagerCache"	address="" bindingConfiguration="ServiceBinding" binding="wsFederationHttpBinding" contract="BMS.ServiceContracts.IBedManagerCache"		
	endpoint		address="win" bindingConfiguration="WinBinding" binding="wsFederationHttpBinding" contract="BMS.ServiceContracts.IBedManagerCache"	address="win" bindingConfiguration="WinBinding" binding="wsFederationHttpBinding" contract="BMS.ServiceContracts.IBedManagerCache"		

Section	Configuration Key/Name	Configuration values (ex.)			Description
		Split Service		Combine Service	
		BMS.ServiceHost.config		BMS.ServiceHost.config	
	endpoint			contract="IMetadataExchange" binding="mexHttpBinding" address="mex"	contract="IMetadataExchange" binding="mexHttpBinding" address="mex"
	service	name="BMS.ServiceImplementation.ConfigurationOperationsCore" behaviorConfiguration="ServiceBehavior"		address="unsec" binding="basicHttpBinding" contract="BMS.ServiceContracts.IBedManagerCache"	address="unsec" binding="basicHttpBinding" contract="BMS.ServiceContracts.IBedManagerCache"
	host\base\baseAddresses\add	baseAddress="http://<ServerAddress>210:16050/BMSConfigurationOperations"			name="BMS.ServiceImplementation.ConfigurationOperationsCore" behaviorConfiguration="ServiceBehavior"
	endpoint	address="" bindingConfiguration="ServiceBinding" binding="wsFederationHttpBinding" contract="BMS.ServiceContracts.IConfigurationOperations"			baseAddress="http://localhost:16050/BMSConfigurationOperations"
	endpoint	address="win" bindingConfiguration="WinBinding" binding="wsFederationHttpBinding" contract="BMS.ServiceContracts.IConfigurationOperations"			address="" bindingConfiguration="ServiceBinding" binding="wsFederationHttpBinding" contract="BMS.ServiceContracts.IConfigurationOperations"

Section	Configuration Key/Name	Configuration values (ex.)			Description
		Split Service		Combine Service	
		BMS.ServiceHost.config		BMS.VI.ServiceHost.exe.config	BMS.ServiceHost.config
	endpoint	contract="IMetadataExchange" binding="mexHttpBinding" address="mex"		address="win" bindingConfiguration="Win Binding" binding="wsFederationHttpBinding" contract="BMS.ServiceContracts.IConfigurationOperations"	
	endpoint	address="unsec" binding="basicHttpBinding" contract="BMS.ServiceContracts.IConfigurationOperations"		contract="IMetadataExchange" binding="mexHttpBinding" address="mex"	
	service	name="InfoWorld.Security.Authorization.AuthorizationSubscriber" behaviorConfiguration="ServiceBehavior"		address="unsec" binding="basicHttpBinding" contract="BMS.ServiceContracts.IConfigurationOperations"	
	host\base\baseAddresses\add	baseAddress="http://<ServerAddress>210:16050/BMS/AuthorizationSubscriber"		name="InfoWorld.Security.Authorization.AuthorizationSubscriber" behaviorConfiguration="ServiceBehavior"	
	endpoint	address="" binding="wsFederationHttpBinding" bindingConfiguration="WinBinding" contract="InfoWorld.Security.Authorization.AuthorizationSubscriber.IAuthorizationSubscriber"		baseAddress="http://localhost:16050/BMS/AuthorizationSubscriber"	

Section	Configuration Key/Name	Configuration values (ex.)			Description
		Split Service		Combine Service	
		BMS.ServiceHost.config		BMS.ServiceHost.config	
	service			address="" binding="wsFederationHttpBinding" bindingConfiguration="WinBinding" contract="InfoWorld.Security.Authorization.AuthorizationSubscriber.IAuthorizationSubscriber"	
	host\base\baseAddresses\add		name="TransferFlow" behaviorConfiguration="WorkflowService"	name="TransferFlow" behaviorConfiguration="WorkflowService"	
	endpoint		baseAddress="http://<Server Address>211:16050/TransferWF"	baseAddress="http://localhost:16050/TransferWF"	
	endpoint		address="" bindingConfiguration="ServiceBinding" binding="wsFederationHttpBinding" contract="BMS.Workflows.WF.ITransferFlow"	address="" bindingConfiguration="ServiceBinding" binding="wsFederationHttpBinding" contract="BMS.Workflows.WF.ITransferFlow"	
	endpoint		address="win" bindingConfiguration="WinBinding" binding="wsFederationHttpBinding" contract="BMS.Workflows.WF.ITransferFlow"	address="win" bindingConfiguration="WinBinding" binding="wsFederationHttpBinding" contract="BMS.Workflows.WF.ITransferFlow"	
	endpoint		contract="IMetadataExchange" binding="mexHttpBinding" address="mex"	contract="IMetadataExchange" binding="mexHttpBinding" address="mex"	

Section	Configuration Key/Name	Configuration values (ex.)			Description
		Split Service		Combine Service	
		BMS.ServiceHost.config		BMS.ServiceHost.config	
	service		address="unsec" binding="basicHttpBinding" contract="BMS.Workflows.WF.ITransferFlow"	address="unsec" binding="basicHttpBinding" contract="BMS.Workflows.WF.ITransferFlow"	
	host\base\baseAddresses\add		name="WaitingListFlow" behaviorConfiguration="WorkflowService"	name="WaitingListFlow" behaviorConfiguration="WorkflowService"	
	endpoint		baseAddress="http://<Server Address>211:16050/WaitingListWF"	baseAddress="http://localhost:16050/WaitingListWF"	
	endpoint		address="" bindingConfiguration="ServiceBinding" binding="wsFederationHttpBinding" contract="BMS.Workflows.WF.IWaitingListFlow"	address="" bindingConfiguration="ServiceBinding" binding="wsFederationHttpBinding" contract="BMS.Workflows.WF.IWaitingListFlow"	
	endpoint		address="win" bindingConfiguration="WinBinding" binding="wsFederationHttpBinding" contract="BMS.Workflows.WF.IWaitingListFlow"	address="win" bindingConfiguration="WinBinding" binding="wsFederationHttpBinding" contract="BMS.Workflows.WF.IWaitingListFlow"	
	endpoint		contract="IMetadataExchange" binding="mexHttpBinding" address="mex"	contract="IMetadataExchange" binding="mexHttpBinding" address="mex"	

Section	Configuration Key/Name	Configuration values (ex.)			Description
		Split Service		Combine Service	
		BMS.ServiceHost.config		BMS.ServiceHost.config	
	service		address="unsec" binding="basicHttpBinding" contract="BMS.Workflows.WF.IWaitingListFlow"	address="unsec" binding="basicHttpBinding" contract="BMS.Workflows.WF.IWaitingListFlow"	
	host\base\baseAddresses\add		name="BedUnavailableFlow" behaviorConfiguration="WorkflowService"	name="BedUnavailableFlow" behaviorConfiguration="WorkflowService"	
	endpoint		baseAddress="http://<Server Address>211:16050/BedUnavailableWF"	name="BedUnavailableFlow" behaviorConfiguration="WorkflowService"	
	endpoint		address="" bindingConfiguration="ServiceBinding" binding="wsFederationHttpBinding" contract="BMS.Workflows.WF.IBedUnavailableFlow"	address="" bindingConfiguration="ServiceBinding" binding="wsFederationHttpBinding" contract="BMS.Workflows.WF.IBedUnavailableFlow"	
	endpoint		address="win" bindingConfiguration="WinBinding" binding="wsFederationHttpBinding" contract="BMS.Workflows.WF.IBedUnavailableFlow"	address="win" bindingConfiguration="WinBinding" binding="wsFederationHttpBinding" contract="BMS.Workflows.WF.IBedUnavailableFlow"	
	endpoint		contract="IMetadataExchange" binding="mexHttpBinding" address="mex"	contract="IMetadataExchange" binding="mexHttpBinding" address="mex"	

Section	Configuration Key/Name	Configuration values (ex.)			Description
		Split Service		Combine Service	
		BMS.ServiceHost.config		BMS.ServiceHost.config	
	service		address="unsec" binding="basicHttpBinding" contract="BMS.Workflows.WF.IBedUnavailableFlow"	address="unsec" binding="basicHttpBinding" contract="BMS.Workflows.WF.IBedUnavailableFlow"	
	host\base\baseAddresses\add		name="BMS.ServiceImplementation.VistaQueryCore" behaviorConfiguration="ServiceBehavior"	name="BMS.ServiceImplementation.VistaQueryCore" behaviorConfiguration="ServiceBehavior"	
	endpoint		baseAddress="http://<Server Address>211:16050/VistaQuery"	baseAddress="http://localhost:16050/VistaQuery"	
	endpoint		address="" bindingConfiguration="ServiceBinding" binding="wsFederationHttpBinding" contract="BMS.ServiceContracts.IVistaWorkerQuery"	address="" bindingConfiguration="ServiceBinding" binding="wsFederationHttpBinding" contract="BMS.ServiceContracts.IVistaWorkerQuery"	
	endpoint		address="win" bindingConfiguration="WinBinding" binding="wsFederationHttpBinding" contract="BMS.ServiceContracts.IVistaWorkerQuery"	address="win" bindingConfiguration="WinBinding" binding="wsFederationHttpBinding" contract="BMS.ServiceContracts.IVistaWorkerQuery"	
	endpoint		contract="IMetadataExchange" binding="mexHttpBinding" address="mex"	contract="IMetadataExchange" binding="mexHttpBinding" address="mex"	

Section	Configuration Key/Name	Configuration values (ex.)			Description
		Split Service		Combine Service	
		BMS.ServiceHost.config		BMS.ServiceHost.config	
	service		address="unsec" binding="basicHttpBinding" contract="BMS.ServiceContracts.IVistaWorkerQuery"	address="unsec" binding="basicHttpBinding" contract="BMS.ServiceContracts.IVistaWorkerQuery"	
	host\base\baseAddresses\add		name="BMS.VistaIntegration.HL7.ServiceImplementation.HL7OperationsCore" behaviorConfiguration="BasicBindingBehavior"	name="BMS.VistaIntegration.HL7.ServiceImplementation.HL7OperationsCore" behaviorConfiguration="BasicBindingBehavior"	
	endpoint		baseAddress="http://<Server Address>211:16050/HL7Operations"	baseAddress="http://localhost:16050/HL7Operations"	
	bindings\basicHttpBinding		address="" bindingConfiguration="messagingBinding" binding="basicHttpBinding" contract="BMS.VistaIntegration.HL7.ServiceContracts.IHL7Operations"	address="" bindingConfiguration="messagingBinding" binding="basicHttpBinding" contract="BMS.VistaIntegration.HL7.ServiceContracts.IHL7Operations"	
	binding				
	binding		name="EVSBinding" maxReceivedMessageSize="2147483647" closeTimeout="00:10:00" openTimeout="00:10:00" receiveTimeout="00:15:00" sendTimeout="00:10:00"	name="EVSBinding" maxReceivedMessageSize ="2147483647" closeTimeout="00:10:00" openTimeout="00:10:00" receiveTimeout="00:15:00" sendTimeout="00:10:00"	

Section	Configuration Key/Name	Configuration values (ex.)			Description
		Split Service		Combine Service	
		BMS.ServiceHost.config		BMS.ServiceHost.config	
	binding		<pre>name="subscriptionBinding" maxBufferSize="2147483647" maxReceivedMessageSize="2147483647" closeTimeout="00:10:00" openTimeout="00:10:00" receiveTimeout="00:15:00" sendTimeout="00:10:00"</pre>	<pre>name="subscriptionBinding" maxBufferSize="2147483647" maxReceivedMessageSize="2147483647" closeTimeout="00:10:00" openTimeout="00:10:00" receiveTimeout="00:15:00" sendTimeout="00:10:00"</pre>	
	readerQuotas		<pre>name="messagingBinding" maxBufferSize="2147483647" maxReceivedMessageSize="2147483647" closeTimeout="00:10:00" openTimeout="00:10:00" receiveTimeout="00:15:00" sendTimeout="00:10:00"</pre>	<pre>name="messagingBinding" maxBufferSize="2147483647" maxReceivedMessageSize="2147483647" closeTimeout="00:10:00" openTimeout="00:10:00" receiveTimeout="00:15:00" sendTimeout="00:10:00"</pre>	
	binding		<pre>maxDepth="2147483647" maxStringContentLength="2147483647" maxArrayLength="2147483647" maxBytesPerRead="2147483647" maxNameTableCharCount="2147483647"</pre>	<pre>maxDepth="2147483647" maxStringContentLength="2147483647" maxArrayLength="2147483647" maxBytesPerRead="2147483647" maxNameTableCharCount="2147483647"</pre>	

Section	Configuration Key/Name	Configuration values (ex.)			Description
		Split Service		Combine Service	
		BMS.ServiceHost.config		BMS.ServiceHost.config	
	readerQuotas		name="QuerySvcSoap" closeTimeout="00:10:00" openTimeout="00:10:00" receiveTimeout="00:15:00" sendTimeout="00:10:00" allowCookies="false"  bypassProxyOnLocal="false" hostNameComparisonMode="StrongWildcard"  maxBufferSize="2147483647"  maxReceivedMessageSize="2147483647"  messageEncoding="Text" textEncoding="utf-8" transferMode="Buffered"  useDefaultWebProxy="true"	name="QuerySvcSoap" closeTimeout="00:10:00" openTimeout="00:10:00" receiveTimeout="00:15:00" sendTimeout="00:10:00" allowCookies="false"  bypassProxyOnLocal="false" hostNameComparisonMode="StrongWildcard"  maxBufferSize="2147483647"  maxReceivedMessageSize="2147483647"  messageEncoding="Text" textEncoding="utf-8" transferMode="Buffered"  useDefaultWebProxy="true"	
	security mode="None"		maxDepth="32" maxStringContentLength="2147483647" maxArrayLength="2147483647"  maxBytesPerRead="2147483647" maxNameTableCharCount="2147483647"	maxDepth="32" maxStringContentLength="2147483647" maxArrayLength="2147483647"  maxBytesPerRead="2147483647" maxNameTableCharCount="2147483647"	
	transport				
	message		clientCredentialType="None" proxyCredentialType="None" realm=""	clientCredentialType="None" proxyCredentialType="None"	

Section	Configuration Key/Name	Configuration values (ex.)			Description
		Split Service		Combine Service	
		BMS.ServiceHost.config		BMS.VI.ServiceHost.exe.config	BMS.ServiceHost.config
				realm=""	
	binding			clientCredentialType="UserName" algorithmSuite="Default"	clientCredentialType="User Name" algorithmSuite="Default"
	readerQuotas			name="QuerySvcSoapHttps" closeTimeout="00:10:00" openTimeout="00:10:00" receiveTimeout="00:15:00" sendTimeout="00:10:00" allowCookies="false"  bypassProxyOnLocal="false" hostNameComparisonMode="StrongWildcard" maxBufferSize="2147483647" maxReceivedMessageSize="2147483647" messageEncoding="Text" textEncoding="utf-8" transferMode="Buffered" useDefaultWebProxy="true"	name="QuerySvcSoapHttps" closeTimeout="00:10:00" openTimeout="00:10:00" receiveTimeout="00:15:00" sendTimeout="00:10:00" allowCookies="false"  bypassProxyOnLocal="false" hostNameComparisonMode="StrongWildcard" maxBufferSize="2147483647" maxReceivedMessageSize="2147483647" messageEncoding="Text" textEncoding="utf-8" transferMode="Buffered" useDefaultWebProxy="true"
	security mode="Transport"			maxDepth="32" maxStringContentLength="2147483647" maxArrayLength="2147483647" maxBytesPerRead="2147483647" maxNameTableCharCount="2147483647"	maxDepth="32" maxStringContentLength="2147483647" maxArrayLength="2147483647" maxBytesPerRead="2147483647" maxNameTableCharCount="2147483647"

Section	Configuration Key/Name	Configuration values (ex.)			Description
		Split Service		Combine Service	
		BMS.ServiceHost.config		BMS.VI.ServiceHost.exe.config	BMS.ServiceHost.config
	transport				
	wsFederationHttpBinding			clientCredentialType="None" proxyCredentialType="None" realm=""	clientCredentialType="None" proxyCredentialType="None" realm=""
	binding				
	readerQuotas			name="WSFederationHttpBinding_AuthenticatedService" maxReceivedMessageSize="2147483647" closeTimeout="00:10:00" openTimeout="00:10:00" receiveTimeout="00:15:00" sendTimeout="00:10:00"	name="WSFederationHttpBinding_AuthenticatedService" maxReceivedMessageSize = "2147483647" closeTimeout="00:10:00" openTimeout="00:10:00" receiveTimeout="00:15:00" sendTimeout="00:10:00"
	security mode="Message"			maxDepth="32" maxStringContentLength="2147483647" maxArrayLength="2147483647" maxBytesPerRead="4096" maxNameTableCharCount="16384"	maxDepth="32" maxStringContentLength="2147483647" maxArrayLength="2147483647" maxBytesPerRead="4096" maxNameTableCharCount = "16384"
	message				
	issuer	address="http://<ServerAddress>210:16050/STS/mex"		algorithmSuite="Default" issuedKeyType="Symmetric Key" issuedTokenType="http://docs.oasis-open.org/wss/oasis-wss-saml-token-profile-1.1#SAMLV2.0" negotiateServiceCredential="false" establishSecurityContext="true"	algorithmSuite="Default" issuedKeyType="Symmetric Key" issuedTokenType="http://docs.oasis-open.org/wss/oasis-wss-saml-token-profile-1.1#SAMLV2.0" negotiateServiceCredential = "false" establishSecurityContext="true"

Section	Configuration Key/Name	Configuration values (ex.)			Description
		Split Service		Combine Service	
		BMS.ServiceHost.config		BMS.VI.ServiceHost.exe.config	BMS.ServiceHost.config
	identity\dns		address="http://<ServerAddress>210:16050/STS/" binding="wsHttpBinding" bindingConfiguration="wsUserName"	address="http://localhost:16050/STS/" binding="wsHttpBinding" bindingConfiguration="wsUserName"	
	binding	name="ServiceBinding" maxBufferPoolSize="2147483647" maxReceivedMessageSize="2147483647" closeTimeout="00:10:00" openTimeout="00:10:00" receiveTimeout="00:15:00" sendTimeout="00:10:00"	value="IWHM3STS"	value="IWHM3STS"	
	readerQuotas	maxDepth="32" maxStringContentLength="2147483647" maxArrayLength="2147483647" maxBytesPerRead="4096" maxNameTableCharCount="16384"	name="ServiceBinding" maxBufferPoolSize="2147483647" maxReceivedMessageSize="2147483647" closeTimeout="00:10:00" openTimeout="00:10:00" receiveTimeout="00:15:00" sendTimeout="00:10:00"	name="ServiceBinding" maxBufferPoolSize="2147483647" maxReceivedMessageSize="2147483647" closeTimeout="00:10:00" openTimeout="00:10:00" receiveTimeout="00:15:00" sendTimeout="00:10:00"	
	security mode="Message"		maxDepth="32" maxStringContentLength="2147483647" maxArrayLength="2147483647" maxBytesPerRead="4096" maxNameTableCharCount="16384"	maxDepth="32" maxStringContentLength="2147483647" maxArrayLength="2147483647" maxBytesPerRead="4096" maxNameTableCharCount="16384"	
	message issuedTokenType="http://docs.oasis-open.org/wss/oasis-wss-saml-token-profile-1.1#SAMLV2.0" negotiateServiceCredential="false"	issuerMetadata address="http://<ServerAddress>210:16050/STS/mex"			

Section	Configuration Key/Name	Configuration values (ex.)			Description
		Split Service		Combine Service	
		BMS.ServiceHost.config		BMS.VI.ServiceHost.exe.config	BMS.ServiceHost.config
	establishSecurityContext="true"				
	binding	name="WinBinding" maxBufferPoolSize="2147483647" maxReceivedMessageSize="2147483647" closeTimeout="00:10:00" openTimeout="00:10:00" receiveTimeout="00:15:00" sendTimeout="00:10:00"	issuerMetadata address="http://<ServerAddress>210:16050/STS/mex"	issuerMetadata address="http://localhost:16050/STS/mex"	
	readerQuotas	maxDepth="32" maxStringContentLength="2147483647" maxArrayLength="2147483647" maxBytesPerRead="4096" maxNameTableCharCount="16384"	name="WinBinding" maxBufferPoolSize="2147483647" maxReceivedMessageSize="2147483647" closeTimeout="00:10:00" openTimeout="00:10:00" receiveTimeout="00:15:00" sendTimeout="00:10:00"	name="WinBinding" maxBufferPoolSize="2147483647" maxReceivedMessageSize="2147483647" closeTimeout="00:10:00" openTimeout="00:10:00" receiveTimeout="00:15:00" sendTimeout="00:10:00"	
	security mode="Message"		maxDepth="32" maxStringContentLength="2147483647" maxArrayLength="2147483647" maxBytesPerRead="4096" maxNameTableCharCount="16384"	maxDepth="32" maxStringContentLength="2147483647" maxArrayLength="2147483647" maxBytesPerRead="4096" maxNameTableCharCount="16384"	
	message	issuedTokenType="http://docs.oasis-open.org/wss/oasis-wss-saml-token-profile-1.1#SAMLV2.0" negotiateServiceCredential="false" establishSecurityContext="true"			

Section	Configuration Key/Name	Configuration values (ex.)			Description
		Split Service		Combine Service	
		BMS.ServiceHost.config		BMS.VI.ServiceHost.exe.config	BMS.ServiceHost.config
	issuer	address="http://<ServerAddress>210:16050/STS/Windows" binding="wsHttpBinding" bindingConfiguration="StsWinBinding"	issuedTokenType="http://docs.oasis-open.org/wss/oasis-wss-saml-token-profile-1.1#SAMLV2.0" negotiateServiceCredential="false" establishSecurityContext="true"	issuedTokenType="http://docs.oasis-open.org/wss/oasis-wss-saml-token-profile-1.1#SAMLV2.0" negotiateServiceCredential="false" establishSecurityContext="true"	
	identity\servicePrincipalName	value="host/localhost"	address="http://<ServerAddress>210:16050/STS/Windows" binding="wsHttpBinding" bindingConfiguration="StsWinBinding"	address="http://localhost:16050/STS/Windows" binding="wsHttpBinding" bindingConfiguration="StsWinBinding"	
	binding	name="WinBindingHttps" maxBufferPoolSize="2147483647" maxReceivedMessageSize="2147483647" closeTimeout="00:10:00" openTimeout="00:10:00" receiveTimeout="00:15:00" sendTimeout="00:10:00"	value="host/localhost"	value="host/localhost"	
	readerQuotas	maxDepth="32" maxStringContentLength="2147483647" maxArrayLength="2147483647" maxBytesPerRead="4096" maxNameTableCharCount="16384"	name="WinBindingHttps" maxBufferPoolSize="2147483647" maxReceivedMessageSize="2147483647" closeTimeout="00:10:00" openTimeout="00:10:00" receiveTimeout="00:15:00" sendTimeout="00:10:00"	name="WinBindingHttps" maxBufferPoolSize="2147483647" maxReceivedMessageSize="2147483647" closeTimeout="00:10:00" openTimeout="00:10:00" receiveTimeout="00:15:00" sendTimeout="00:10:00"	

Section	Configuration Key/Name	Configuration values (ex.)			Description
		Split Service		Combine Service	
		BMS.ServiceHost.config		BMS.VI.ServiceHost.exe.config	BMS.ServiceHost.config
	security mode="TransportWithMessageCredential"		maxDepth="32" maxStringContentLength="2147483647" maxArrayLength="2147483647" maxBytesPerRead="4096" maxNameTableCharCount="16384"	maxDepth="32" maxStringContentLength="2147483647" maxArrayLength="2147483647" maxBytesPerRead="4096" maxNameTableCharCount="16384"	
	message	issuedTokenType="http://docs.oasis-open.org/wss/oasis-wss-saml-token-profile-1.1#SAMLV2.0" negotiateServiceCredential="false" establishSecurityContext="true"			
	issuer	address="http://<ServerAddress>210:16050/STS/Windows" binding="wsHttpBinding" bindingConfiguration="StsWinBinding"	issuedTokenType="http://docs.oasis-open.org/wss/oasis-wss-saml-token-profile-1.1#SAMLV2.0" negotiateServiceCredential="false" establishSecurityContext="true"	issuedTokenType="http://docs.oasis-open.org/wss/oasis-wss-saml-token-profile-1.1#SAMLV2.0" negotiateServiceCredential="false" establishSecurityContext="true"	
	identity\servicePrincipalName	value="host/localhost"	address="http://<ServerAddress>210:16050/STS/Windows" binding="wsHttpBinding" bindingConfiguration="StsWinBinding"	address="http://localhost:16050/STS/Windows" binding="wsHttpBinding" bindingConfiguration="StsWinBinding"	
	wsHttpBinding		value="host/localhost"	value="host/localhost"	
	binding	name="wsUserName" maxReceivedMessageSize="2147483647" closeTimeout="00:10:00" openTimeout="00:10:00" receiveTimeout="00:15:00" sendTimeout="00:10:00"			

Section	Configuration Key/Name	Configuration values (ex.)			Description
		Split Service			Combine Service
		BMS.ServiceHost.config	BMS.VI.ServiceHost.exe.config	BMS.ServiceHost.config	
	security mode="Message"				
	message	clientCredentialType="UserName" negotiateServiceCredential="false" algorithmSuite="Default" establishSecurityContext="true"			
	binding	name="StsWinBinding" closeTimeout="00:10:00" openTimeout="00:10:00" receiveTimeout="00:15:00" sendTimeout="00:10:00"			
	security mode="Message"				
	message	clientCredentialType="UserName" negotiateServiceCredential="false" algorithmSuite="Default" establishSecurityContext="true"			
	binding	name="StsWinBinding" closeTimeout="00:10:00" openTimeout="00:10:00" receiveTimeout="00:15:00" sendTimeout="00:10:00"	clientCredentialType="UserName" negotiateServiceCredential="false" algorithmSuite="Default" establishSecurityContext="true"	clientCredentialType="User Name" negotiateServiceCredential ="false" algorithmSuite="Default" establishSecurityContext="true"	Kerberos/NTLM
	security mode="Message"	name="StsWinBinding" closeTimeout="00:10:00" openTimeout="00:10:00" receiveTimeout="00:15:00" sendTimeout="00:10:00"	name="StsWinBinding" closeTimeout="00:10:00" openTimeout="00:10:00" receiveTimeout="00:15:00" sendTimeout="00:10:00"	name="StsWinBinding" closeTimeout="00:10:00" openTimeout="00:10:00" receiveTimeout="00:15:00" sendTimeout="00:10:00"	
	message	clientCredentialType="Windows" negotiateServiceCredential="true" establishSecurityContext="true"			
	binding	name="wsBindConf" maxReceivedMessageSize="2147483647" closeTimeout="00:10:00" openTimeout="00:10:00" receiveTimeout="00:15:00" sendTimeout="00:10:00"			
	client				
	endpoint				

Section	Configuration Key/Name	Configuration values (ex.)			Description
		Split Service		Combine Service	
		BMS.ServiceHost.config	BMS.VI.ServiceHost.exe.config	BMS.ServiceHost.config	
	endpoint		address="http://vaausbmsweb26:87/QuerySvc.asmx" binding="basicHttpBinding" bindingConfiguration="QuerySvcSoap" contract="QuerySvcService.QuerySvcSoap" name="QuerySvcSoap"	address="http://vaausbmsweb76/mdws2/QuerySvc.asmx" binding="basicHttpBinding" bindingConfiguration="QuerySvcSoap" contract="QuerySvcService.QuerySvcSoap" name="QuerySvcSoap"	MD WS2
	endpoint		address="https://vaausnumweb22.aac.dva.va.gov/Inpatient.asmx" binding="basicHttpBinding" bindingConfiguration="QuerySvcSoapHttps" contract="BMS.ServicesWrapper.Proxy.InpatientSoap" name="InpatientSoap"	address="https://hceveah03:100/Inpatient.asmx" binding="basicHttpBinding" bindingConfiguration="QuerySvcSoapHttps" contract="BMS.ServicesWrapper.Proxy.InpatientSoap" name="InpatientSoap"	NUM I

Section	Configuration Key/Name	Configuration values (ex.)			Description
		Split Service		Combine Service	
		BMS.ServiceHost.config	BMS.VI.ServiceHost.exe.config	BMS.ServiceHost.config	
	identity\dns		address="http://<ServerAddress>210:16050/PAP" behaviorConfiguration="ClientCredentialsBehavior" binding="wsFederationHttpBinding" bindingConfiguration="WS FederationHttpBinding_AuthenticatedService" contract="InfoWorld.Security.Authorization.PolicyAdministrationPoint.IAdministrativeFunctions" name="PAP.Administrative Functions"	address="http://localhost:16050/PAP" behaviorConfiguration="ClientCredentialsBehavior" binding="wsFederationHttpBinding" bindingConfiguration="WS FederationHttpBinding_AuthenticatedService" contract="InfoWorld.Security.Authorization.PolicyAdministrationPoint.IAdministrativeFunctions" name="PAP.Administrative Functions"	PAP
	endpoint			value="IWHM3Services"	value="IWHM3Services"

Section	Configuration Key/Name	Configuration values (ex.)			Description
		Split Service		Combine Service	
		BMS.ServiceHost.config		BMS.ServiceHost.config	
	identity\dns		endpoint address="http://<ServerAddress>210:16050/PDP"  behaviorConfiguration="ClientCredentialsBehavior"  binding="wsFederationHttpBinding"  bindingConfiguration="WS FederationHttpBinding_AuthenticatedService"  contract="InfoWorld.Security.PolicyDecisionPoint.IAuthorizationService"  name="PDP.AuthorizationService"	address="http://localhost:16050/PDP"  behaviorConfiguration="ClientCredentialsBehavior"  binding="wsFederationHttpBinding"  bindingConfiguration="WS FederationHttpBinding_AuthenticatedService"  contract="InfoWorld.Security.PolicyDecisionPoint.IAuthorizationService"  name="PDP.AuthorizationService"	PDP
	endpoint			value="IWHM3Services"	value="IWHM3Services"

Section	Configuration Key/Name	Configuration values (ex.)			Description
		Split Service		Combine Service	
		BMS.ServiceHost.config	BMS.VI.ServiceHost.exe.config	BMS.ServiceHost.config	
	identity\dns		address="http://<ServerAddress>210:16050/PAP" behaviorConfiguration="WindowsClientCredentials" binding="wsFederationHttpBinding" bindingConfiguration="Win Binding" contract="InfoWorld.Security.Authorization.PolicyAdministrationPoint.IAdministrativeFunctions" name="PAP.Administrative Functions.Windows"	address="http://localhost:16050/PAP" behaviorConfiguration="WindowsClientCredentials" binding="wsFederationHttpBinding" bindingConfiguration="Win Binding" contract="InfoWorld.Security.Authorization.PolicyAdministrationPoint.IAdministrativeFunctions" name="PAP.Administrative Functions.Windows"	PAP: Windows authentication
	endpoint		value="IWHM3Services"	value="IWHM3Services"	

Section	Configuration Key/Name	Configuration values (ex.)			Description
		Split Service		Combine Service	
		BMS.ServiceHost.config		BMS.ServiceHost.exe.config	BMS.ServiceHost.config
	identity\dns		address="http://<ServerAddress>210:16050/PDP" behaviorConfiguration="WindowsClientCredentials" binding="wsFederationHttpBinding" bindingConfiguration="Win Binding" contract="InfoWorld.Security.PolicyDecisionPoint.IAuthorizationService" name="PDP.Authorization Service.Windows"	address="http://localhost:16050/PDP" behaviorConfiguration="WindowsClientCredentials" binding="wsFederationHttpBinding" bindingConfiguration="Win Binding" contract="InfoWorld.Security.PolicyDecisionPoint.IAuthorizationService" name="PDP.Authorization Service.Windows"	PDP: Windows authentication
	endpoint		value="IWHM3Services"	value="IWHM3Services"	

Section	Configuration Key/Name	Configuration values (ex.)			Description
		Split Service		Combine Service	
		BMS.ServiceHost.config		BMS.ServiceHost.config	
	identity\dns		address="http://<ServerAddress>211:16050/QueryFunctions" behaviorConfiguration="ClientCredentialsBehavior" binding="wsFederationHttpBinding" bindingConfiguration="WSFederationHttpBinding_AuthenticatedService" name="EIS.QueryFunctions" contract="InfoWorld.EIS.IQueryFunctions"	address="http://localhost:16050/QueryFunctions" behaviorConfiguration="ClientCredentialsBehavior" binding="wsFederationHttpBinding" bindingConfiguration="WSFederationHttpBinding_AuthenticatedService" name="EIS.QueryFunctions" contract="InfoWorld.EIS.IQueryFunctions"	EIS: QueryFunctions
	endpoint		value="IWHM3Services"	value="IWHM3Services"	

Section	Configuration Key/Name	Configuration values (ex.)			Description
		Split Service		Combine Service	
		BMS.ServiceHost.config		BMS.ServiceHost.exe.config	BMS.ServiceHost.config
	identity\dns		address="http://<ServerAddress>211:16050/QueryFunctions" behaviorConfiguration="WindowsClientCredentials" binding="wsFederationHttpBinding" bindingConfiguration="Win Binding" contract="InfoWorld.EIS.IQueryFunctions" name="EIS.QueryFunctions.Windows"	address="http://localhost:16050/QueryFunctions" behaviorConfiguration="WindowsClientCredentials" binding="wsFederationHttpBinding" bindingConfiguration="Win Binding" contract="InfoWorld.EIS.IQueryFunctions" name="EIS.QueryFunctions.Windows"	EIS: Windows authentication
	endpoint		value="IWHM3Services"	value="IWHM3Services"	

Section	Configuration Key/Name	Configuration values (ex.)			Description
		Split Service		Combine Service	
		BMS.ServiceHost.config		BMS.ServiceHost.config	
	identity\dns		address="http://<ServerAddress>211:16050/EntityManagement" behaviorConfiguration="ClientCredentialsBehavior" binding="wsFederationHttpBinding" name="EIS.EntityManagement" bindingConfiguration="WS FederationHttpBinding_AuthenticatedService" contract="InfoWorld.EIS.IEntityManagement"	address="http://localhost:16050/EntityManagement" behaviorConfiguration="ClientCredentialsBehavior" binding="wsFederationHttpBinding" name="EIS.EntityManagement" bindingConfiguration="WS FederationHttpBinding_AuthenticatedService" contract="InfoWorld.EIS.IEntityManagement"	EIS: EntityManagement
	endpoint		value="IWHM3Services"	value="IWHM3Services"	

Section	Configuration Key/Name	Configuration values (ex.)			Description
		Split Service		Combine Service	
		BMS.ServiceHost.config	BMS.VI.ServiceHost.exe.config	BMS.ServiceHost.config	
	identity\dns		address="http://<ServerAddress>211:16050/EntityManagement" behaviorConfiguration="WindowsClientCredentials" binding="wsFederationHttpBinding" name="EIS.EntityManagement.Windows" bindingConfiguration="WinBinding" contract="InfoWorld.EIS.EntityManagement"	address="http://localhost:16050/EntityManagement" behaviorConfiguration="WindowsClientCredentials" binding="wsFederationHttpBinding" name="EIS.EntityManagement.Windows" bindingConfiguration="WinBinding" contract="InfoWorld.EIS.EntityManagement"	EIS: Windows authentication
	endpoint		value="IWHM3Services"	value="IWHM3Services"	
	endpoint		address="http://<ServerAddress>211:16050/CTSVocabularyRuntime" name="EVS.CTSVocabularyRuntime" binding="basicHttpBinding" bindingConfiguration="EVS Binding" contract="InfoWorld.EVS.CTSVAPI.RuntimeOperations" behaviorConfiguration="DataContractSerializer"	address="http://localhost:16050/CTSVocabularyRuntime" name="EVS.CTSVocabularyRuntime" binding="basicHttpBinding" bindingConfiguration="EVS Binding" contract="InfoWorld.EVS.CTSVAPI.RuntimeOperations" behaviorConfiguration="DataContractSerializer"	EVS

Section	Configuration Key/Name	Configuration values (ex.)			Description
		Split Service		Combine Service	
		BMS.ServiceHost.config	BMS.VI.ServiceHost.exe.config	BMS.ServiceHost.config	
	endpoint		address="http://<ServerAddress>211:16050/CTS VocabularyBrowse" name="EVS.CTSVocabularyBrowse" binding="basicHttpBinding" bindingConfiguration="EVS Binding" contract="InfoWorld.EVS.CTSVAPI.BrowserOperations" behaviorConfiguration="DataContractSerializer"	address="http://localhost:16050/CTS VocabularyBrowse" name="EVS.CTSVocabularyBrowse" binding="basicHttpBinding" bindingConfiguration="EVS Binding" contract="InfoWorld.EVS.CTSVAPI.BrowserOperations" behaviorConfiguration="DataContractSerializer"	
	endpoint		address="http://<ServerAddress>211:16050/CTSMessagesBrowse" name="EVS.CTSMessagesBrowse" binding="basicHttpBinding" bindingConfiguration="EVS Binding" contract="InfoWorld.EVS.CTSMAPI.BrowserOperations" behaviorConfiguration="DataContractSerializer"	address="http://localhost:16050/CTSMessagesBrowse" name="EVS.CTSMessagesBrowse" binding="basicHttpBinding" bindingConfiguration="EVS Binding" contract="InfoWorld.EVS.CTSMAPI.BrowserOperations" behaviorConfiguration="DataContractSerializer"	
	endpoint		address="http://<ServerAddress>211:16050/CTSMessagesRuntime" name="EVS.CTSMessagesRuntime" binding="basicHttpBinding" bindingConfiguration="EVS Binding" contract="InfoWorld.EVS.CTSMAPI.RuntimeOperations" behaviorConfiguration="DataContractSerializer"	address="http://localhost:16050/CTSMessagesRuntime" name="EVS.CTSMessagesRuntime" binding="basicHttpBinding" bindingConfiguration="EVS Binding" contract="InfoWorld.EVS.CTSMAPI.RuntimeOperations" behaviorConfiguration="DataContractSerializer"	

Section	Configuration Key/Name	Configuration values (ex.)			Description
		Split Service		Combine Service	
		BMS.ServiceHost.config	BMS.VI.ServiceHost.exe.config	BMS.ServiceHost.config	
	endpoint		address="http://<ServerAddress>211:16050/CTSMessagesEdit" name="EVS.CTSMessagesEdit" binding="basicHttpBinding" bindingConfiguration="EVS Binding" contract="InfoWorld.EVS.CTSEdit.IMessageEdit" behaviorConfiguration="DataContractSerializer"	address="http://localhost:16050/CTSMessageEdit" name="EVS.CTSMessagesEdit" binding="basicHttpBinding" bindingConfiguration="EVS Binding" contract="InfoWorld.EVS.CTSEdit.IMessageEdit" behaviorConfiguration="DataContractSerializer"	
	endpoint		address="http://<ServerAddress>211:16050/CTS VocabulariesEdit" name="EVS.CTSVocabulariesEdit" binding="basicHttpBinding" bindingConfiguration="EVS Binding" contract="ICTSEditVocabulary"	address="http://localhost:16050/CTS VocabularyEdit" name="EVS.CTSVocabulariesEdit" binding="basicHttpBinding" bindingConfiguration="EVS Binding" contract="ICTSEditVocabulary"	

Section	Configuration Key/Name	Configuration values (ex.)			Description
		Split Service		Combine Service	
		BMS.ServiceHost.config		BMS.ServiceHost.config	
	identity\dns		address="http://<ServerAddress>211:16050/BMSQuery" behaviorConfiguration="ClientCredentialsBehavior" binding="wsFederationHttpBinding" bindingConfiguration="WSFederationHttpBinding_AuthenticatedService" name="BMS.BMSQuery" contract="BMS.ServiceContracts.IBedManagerQuery"	address="http://localhost:16050/BMSQuery" behaviorConfiguration="ClientCredentialsBehavior" binding="wsFederationHttpBinding" bindingConfiguration="WSFederationHttpBinding_AuthenticatedService" name="BMS.BMSQuery" contract="BMS.ServiceContracts.IBedManagerQuery"	BMS Query
	endpoint		value="IWHM3Services"	value="IWHM3Services"	

Section	Configuration Key/Name	Configuration values (ex.)			Description
		Split Service		Combine Service	
		BMS.ServiceHost.config	BMS.VI.ServiceHost.exe.config	BMS.ServiceHost.config	
	identity\dns		address="http://<ServerAddress>211:16050/BMSQuery" behaviorConfiguration="WindowsClientCredentials" binding="wsFederationHttpBinding" bindingConfiguration="Win Binding" name="BMS.BMSQuery.Windows" contract="BMS.ServiceContracts.IBedManagerQuery"	address="http://localhost:16050/BMSQuery" behaviorConfiguration="WindowsClientCredentials" binding="wsFederationHttpBinding" bindingConfiguration="Win Binding" name="BMS.BMSQuery.Windows" contract="BMS.ServiceContracts.IBedManagerQuery"	BMS Query: Windows
	endpoint		value="IWHM3Services"	value="IWHM3Services"	

Section	Configuration Key/Name	Configuration values (ex.)			Description
		Split Service		Combine Service	
		BMS.ServiceHost.config		BMS.ServiceHost.config	
	identity\dns		address="http://<ServerAddress>211:16050/BMSOperations" behaviorConfiguration="ClientCredentialsBehavior" binding="wsFederationHttpBinding" bindingConfiguration="WS FederationHttpBinding_AuthenticatedService" name="BMS.BMSOperations" contract="BMS.ServiceContracts.IBedManagerOperations"	address="http://localhost:16050/BMSOperations" behaviorConfiguration="ClientCredentialsBehavior" binding="wsFederationHttpBinding" bindingConfiguration="WS FederationHttpBinding_AuthenticatedService" name="BMS.BMSOperations" contract="BMS.ServiceContracts.IBedManagerOperations"	BMS Operations
	endpoint		value="IWHM3Services"	value="IWHM3Services"	

Section	Configuration Key/Name	Configuration values (ex.)			Description
		Split Service		Combine Service	
		BMS.ServiceHost.config		BMS.ServiceHost.config	
	identity\dns		address="http://<ServerAddress>211:16050/BMSOperations" behaviorConfiguration="WindowsClientCredentials" binding="wsFederationHttpBinding" bindingConfiguration="WinBinding" name="BMS.BMSOperations.Windows" contract="BMS.ServiceContracts.IBedManagerOperations"	address="http://localhost:16050/BMSOperations" behaviorConfiguration="WindowsClientCredentials" binding="wsFederationHttpBinding" bindingConfiguration="WinBinding" name="BMS.BMSOperations.Windows" contract="BMS.ServiceContracts.IBedManagerOperations"	BMS Operations: Windows
	endpoint		value="IWHM3Services"	value="IWHM3Services"	

Section	Configuration Key/Name	Configuration values (ex.)			Description
		Split Service		Combine Service	
		BMS.ServiceHost.config	BMS.VI.ServiceHost.exe.config	BMS.ServiceHost.config	
	identity\dns		address="http://<ServerAddress>210:16050/BMSConfigurationOperations" behaviorConfiguration="ClientCredentialsBehavior" binding="wsFederationHttpBinding" bindingConfiguration="WS FederationHttpBinding_AuthenticatedService" name ="BMS.BMSConfiguration Operations" contract="BMS.ServiceContracts.IConfigurationOperations"	address="http://localhost:16050/BMSConfigurationOperations" behaviorConfiguration="ClientCredentialsBehavior" binding="wsFederationHttpBinding" bindingConfiguration="WS FederationHttpBinding_AuthenticatedService" name ="BMS.BMSConfiguration Operations" contract="BMS.ServiceContracts.IConfigurationOperations"	BMS Configuration
	endpoint		value="IWHM3Services"	value="IWHM3Services"	

Section	Configuration Key/Name	Configuration values (ex.)			Description
		Split Service		Combine Service	
		BMS.ServiceHost.config		BMS.ServiceHost.config	
	identity\dns		address="http://<ServerAddress>210:16050/BMSConfigurationOperations" behaviorConfiguration="WindowsClientCredentials" binding="wsFederationHttpBinding" bindingConfiguration="Win Binding" name ="BMS.BMSConfiguration Operations.Windows" contract="BMS.ServiceContracts.IConfigurationOperations"	address="http://localhost:16050/BMSConfigurationOperations" behaviorConfiguration="WindowsClientCredentials" binding="wsFederationHttpBinding" bindingConfiguration="Win Binding" name ="BMS.BMSConfiguration Operations.Windows" contract="BMS.ServiceContracts.IConfigurationOperations"	BMS Configuration: Windows
	endpoint		value="IWHM3Services"	value="IWHM3Services"	

Section	Configuration Key/Name	Configuration values (ex.)			Description
		Split Service		Combine Service	
		BMS.ServiceHost.config	BMS.VI.ServiceHost.exe.config	BMS.ServiceHost.config	
	identity\dns		address="http://<ServerAddress>211:16050/BedUnavailableWF" behaviorConfiguration="ClientCredentialsBehavior" binding="wsFederationHttpBinding" bindingConfiguration="WS FederationHttpBinding_AuthenticatedService" name="BMSWF.IBedUnavailableFlow" contract="BMS.Workflows.WF.IBedUnavailableFlow"	address="http://localhost:16050/BedUnavailableWF" behaviorConfiguration="ClientCredentialsBehavior" binding="wsFederationHttpBinding" bindingConfiguration="WS FederationHttpBinding_AuthenticatedService" name="BMSWF.IBedUnavailableFlow" contract="BMS.Workflows.WF.IBedUnavailableFlow"	Bed Unavailable Workflow
	endpoint		value="IWHM3Services"	value="IWHM3Services"	

Section	Configuration Key/Name	Configuration values (ex.)			Description
		Split Service		Combine Service	
		BMS.ServiceHost.config	BMS.VI.ServiceHost.exe.config	BMS.ServiceHost.config	
	identity\dns		address="http://<ServerAddress>211:16050/BedUnavailableWF" behaviorConfiguration="WindowsClientCredentials" binding="wsFederationHttpBinding" bindingConfiguration="Win Binding" name="BMSWF.IBedUnavailableFlow.Windows" contract="BMS.Workflows.WF.IBedUnavailableFlow"	address="http://localhost:16050/BedUnavailableWF" behaviorConfiguration="WindowsClientCredentials" binding="wsFederationHttpBinding" bindingConfiguration="Win Binding" name="BMSWF.IBedUnavailableFlow.Windows" contract="BMS.Workflows.WF.IBedUnavailableFlow"	Bed Unavailable Work flow: Windows
	endpoint		value="IWHM3Services"	value="IWHM3Services"	

Section	Configuration Key/Name	Configuration values (ex.)			Description
		Split Service		Combine Service	
		BMS.ServiceHost.config		BMS.ServiceHost.config	
	identity\dns		address="http://<ServerAddress>211:16050/WaitingListWF" behaviorConfiguration="ClientCredentialsBehavior" binding="wsFederationHttpBinding" bindingConfiguration="WS FederationHttpBinding_AuthenticatedService" name="BMSWF.IWaitingListFlow" contract="BMS.Workflows.WF.IWaitingListFlow"	address="http://localhost:16050/WaitingListWF" behaviorConfiguration="ClientCredentialsBehavior" binding="wsFederationHttpBinding" bindingConfiguration="WS FederationHttpBinding_AuthenticatedService" name="BMSWF.IWaitingListFlow" contract="BMS.Workflows.WF.IWaitingListFlow"	Waiting List Workflow
	endpoint		value="IWHM3Services"	value="IWHM3Services"	

Section	Configuration Key/Name	Configuration values (ex.)			Description
		Split Service		Combine Service	
		BMS.ServiceHost.config		BMS.ServiceHost.config	
	identity\dns		address="http://<ServerAddress>211:16050/WaitingListWF" behaviorConfiguration="WindowsClientCredentials" binding="wsFederationHttpBinding" bindingConfiguration="WinBinding" name="BMSWF.IWaitingListFlow.Windows" contract="BMS.Workflows.WF.IWaitingListFlow"	address="http://localhost:16050/WaitingListWF" behaviorConfiguration="ClientCredentialsBehavior" binding="wsFederationHttpBinding" bindingConfiguration="WSFederationHttpBinding_AuthenticatedService" name="BMSWF.IWaitingListFlow" contract="BMS.Workflows.WF.IWaitingListFlow"	Waiting List Workflow
	endpoint		value="IWHM3Services"	value="IWHM3Services"	

Section	Configuration Key/Name	Configuration values (ex.)			Description
		Split Service		Combine Service	
		BMS.ServiceHost.config		BMS.ServiceHost.config	
	identity\dns		address="http://<ServerAddress>211:16050/VistaQuery" behaviorConfiguration="ClientCredentialsBehavior" binding="wsFederationHttpBinding" bindingConfiguration="WS FederationHttpBinding_AuthenticatedService" contract="BMS.ServiceContracts.IVistaWorkerQuery" name="BMS.VistaQuery"	address="http://localhost:16050/WaitingListWF" behaviorConfiguration="WindowsClientCredentials" binding="wsFederationHttpBinding" bindingConfiguration="Win Binding" name="BMSWF.IWaitingListFlow.Windows" contract="BMS.Workflows.WF.IWaitingListFlow"	Waiting List Workflow: Windows
	endpoint		value="IWHM3Services"	value="IWHM3Services"	

Section	Configuration Key/Name	Configuration values (ex.)			Description
		Split Service		Combine Service	
		BMS.ServiceHost.config	BMS.VI.ServiceHost.exe.config	BMS.ServiceHost.config	
	identity\dns		address="http://<ServerAddress>211:16050/VistaQuery" behaviorConfiguration="WindowsClientCredentials" binding="wsFederationHttpBinding" bindingConfiguration="Win Binding" contract="BMS.ServiceContracts.IVistaWorkerQuery" name ="BMS.VistaQuery.WindowS"	address="http://localhost:16050/VistaQuery" behaviorConfiguration="WindowsClientCredentials" binding="wsFederationHttpBinding" bindingConfiguration="Win Binding" contract="BMS.ServiceContracts.IVistaWorkerQuery" name ="BMS.VistaQuery.WindowS"	BMS Vista Query - Configuration Windows
	endpoint		value="IWHM3Services"	value="IWHM3Services"	

Section	Configuration Key/Name	Configuration values (ex.)			Description
		Split Service		Combine Service	
		BMS.ServiceHost.config		BMS.ServiceHost.config	
	identity\dns		address="http://vaww.bms.va.gov:80/CacheService.svc" behaviorConfiguration="WindowsClientCredentials" binding="wsFederationHttpBinding" bindingConfiguration="Win Binding" name="BMS.Cache.Windows" contract="BMS.ServiceContracts.ICacheService"	address="http://vaausbmsservice75.aac.dva.va.gov:80/CacheService.svc" behaviorConfiguration="WindowsClientCredentials" binding="wsFederationHttpBinding" bindingConfiguration="Win Binding" name="BMS.Cache.Windows" contract="BMS.ServiceContracts.ICacheService"	BMS Web Cache - Client: Windows
	endpoint		value="IWHM3Services"	value="IWHM3Services"	

Section	Configuration Key/Name	Configuration values (ex.)			Description
		Split Service		Combine Service	
		BMS.ServiceHost.config		BMS.ServiceHost.config	
	identity\dns		address="https://vaww.bms.va.gov:443/CacheService.svc" behaviorConfiguration="WindowsClientCredentials" binding="wsFederationHttpBinding" bindingConfiguration="WinBindingHttps" name="BMS.Cache.Windows.Https" contract="BMS.ServiceContracts.ICacheService"	address="https://vaausbmsweb75.aac.dva.va.gov:443/CacheService.svc" behaviorConfiguration="WindowsClientCredentials" binding="wsFederationHttpBinding" bindingConfiguration="WinBindingHttps" name="BMS.Cache.Windows.Https" contract="BMS.ServiceContracts.ICacheService"	BMS Web Cache - Client: Windows
	endpoint		value="IWHM3Services"	value="IWHM3Services"	

Section	Configuration Key/Name	Configuration values (ex.)			Description
		Split Service		Combine Service	
		BMS.ServiceHost.config		BMS.ServiceHost.config	
	identity\dns		address="http://<ServerAddress>211:16050/BMSCache" behaviorConfiguration="ClientCredentialsBehavior" binding="wsFederationHttpBinding" bindingConfiguration="WS FederationHttpBinding_AuthenticatedService" name="BMS.BMSCache" contract="BMS.ServiceContracts.IBedManagerCache"	address="http://localhost:16050/BMSCache" behaviorConfiguration="ClientCredentialsBehavior" binding="wsFederationHttpBinding" bindingConfiguration="WS FederationHttpBinding_AuthenticatedService" name="BMS.BMSCache" contract="BMS.ServiceContracts.IBedManagerCache"	BMS Cache
	endpoint		value="IWHM3Services"	value="IWHM3Services"	

Section	Configuration Key/Name	Configuration values (ex.)			Description
		Split Service		Combine Service	
		BMS.ServiceHost.config	BMS.VI.ServiceHost.exe.config	BMS.ServiceHost.config	
	identity\dns		address="http://<ServerAddress>211:16050/BMSCache" behaviorConfiguration="WindowsClientCredentials" binding="wsFederationHttpBinding" bindingConfiguration="Win Binding" contract="BMS.ServiceContracts.IBedManagerCache" name="BMS.BMSCache.Windows"	address="http://localhost:16050/BMSCache" behaviorConfiguration="WindowsClientCredentials" binding="wsFederationHttpBinding" bindingConfiguration="Win Binding" contract="BMS.ServiceContracts.IBedManagerCache" name="BMS.BMSCache.Windows"	
	behaviors		value="IWHM3Services"	value="IWHM3Services"	
	serviceBehaviors				
	behavior	name="ServiceBehavior"			
	serviceMetadata	httpGetEnabled="true"			
	serviceDebug	includeExceptionDetailInFaults="true"			
	dataContractSerializer	type="InfoWorld.Security.Saml20.Saml20ServiceCredentials, Saml20"			
	serviceCredentials	type="InfoWorld.Security.Saml20.Saml20ServiceCredentials, Saml20"			
	serviceCertificate	findValue="IWHM3Services" storeLocation="LocalMachine" storeName="My" x509FindType="FindBySubjectName"			
	issuedTokenAuthentication\knownCertificates\add	findValue="IWHM3STS" storeLocation="LocalMachine" storeName="My" x509FindType="FindBySubjectName"			
	behavior name="WorkflowService"				

Section	Configuration Key/Name	Configuration values (ex.)			Description
		Split Service		Combine Service	
		BMS.ServiceHost.config	BMS.VI.ServiceHost.exe.config	BMS.ServiceHost.config	
	serviceMetadata httpGetEnabled="true"				
	serviceThrottling				
	serviceDebug		maxConcurrentCalls="1500" maxConcurrentSessions="1500"	maxConcurrentCalls="1000" maxConcurrentSessions="1000"	
	serviceCredentials		includeExceptionDetailInFaults="true"	includeExceptionDetailInFaults="true"	
	serviceCertificate		type="InfoWorld.Security.Saml20.Saml20ServiceCredentials, Saml20"	type="InfoWorld.Security.Saml20.Saml20ServiceCredentials, Saml20"	
	issuedTokenAuthentication\\knownCertificates\\add		findValue="IWHM3Services" storeLocation="LocalMachine" storeName="My" x509FindType="FindBySubjectName"	findValue="IWHM3Services" storeLocation="LocalMachine" storeName="My" x509FindType="FindBySubjectName"	
	sqlWorkflowInstanceStore		findValue="IWHM3STS" storeLocation="LocalMachine" storeName="My" x509FindType="FindBySubjectName"	findValue="IWHM3STS" storeLocation="LocalMachine" storeName="My" x509FindType="FindBySubjectName"	

Section	Configuration Key/Name	Configuration values (ex.)			Description
		Split Service		Combine Service	
		BMS.ServiceHost.config		BMS.ServiceHost.config	
	workflowIdle		connectionString="Data Source=<DatabaseAddress>;Network Library=DBMSSOCN;Initial Catalog=BMS_InstanceStore;Integrated Security=True;Asynchronous Processing=True;Pooling=true;Min Pool Size=0;Max Pool Size=250;" instanceEncodingOption="None" instanceCompletionAction="DeleteAll" instanceLockedExceptionAction="BasicRetry" hostLockRenewalPeriod="00:00:30" runnableInstancesDetectionPeriod="00:00:02"	connectionString="Data Source=<DatabaseAddress>;Initial Catalog=BMS_InstanceStore;Integrated Security=True;Asynchronous Processing=True;Pooling=true;Min Pool Size=0;Max Pool Size=100;" instanceEncodingOption="None" instanceCompletionAction="DeleteAll" instanceLockedExceptionAction="BasicRetry" hostLockRenewalPeriod="00:00:30" runnableInstancesDetectionPeriod="00:00:02"	
	sqlWorkflowInstanceStore Promotion		timeToUnload="00:00:00" timeToPersist="00:00:00"	timeToUnload="0"	
	promotionSets		connectionString="Data Source=<DatabaseAddress>;Network Library=DBMSSOCN;Initial Catalog=BMS_InstanceStore;Integrated Security=True;Pooling=true;Min Pool Size=0;Max Pool Size=250;"	connectionString="Data Source=<DatabaseAddress>;Initial Catalog=BMS_InstanceStore;Integrated Security=True;Pooling=true;Min Pool Size=0;Max Pool Size=100;"	
	promotionSet name="AdmissionData"				

Section	Configuration Key/Name	Configuration values (ex.)			Description
		Split Service		Combine Service	
		BMS.ServiceHost.config		BMS.ServiceHost.config	
	promotionSet name="TransferData"		<promotedValue propertyName="AdmissionId"/> <promotedValue propertyName="PatientName"/> <promotedValue propertyName="LocationName"/>	<promotedValue propertyName="AdmissionId"/> <promotedValue propertyName="PatientName"/> <promotedValue propertyName="LocationName"/>	
	behavior name="BasicBindingBehavior"		promotedValue propertyName="PatientSSN"	promotedValue propertyName="PatientSSN"	
	endpointBehaviors		<dataContractSerializer maxItemsInObjectGraph="2147483647"/> <serviceDebug includeExceptionDetailInFaults="true"/> <serviceMetadata httpGetEnabled="true"/>	<dataContractSerializer maxItemsInObjectGraph="2147483647"/> <serviceDebug includeExceptionDetailInFaults="true"/> <serviceMetadata httpGetEnabled="true"/>	
	behavior				
	dataContractSerializer		name="ClientCredentialsBehavior"	name="ClientCredentialsBehavior"	
	durableIssuedTokenClient Credentials\serviceCertificate		maxItemsInObjectGraph="2147483647"	maxItemsInObjectGraph="2147483647"	

Section	Configuration Key/Name	Configuration values (ex.)			Description
		Split Service		Combine Service	
		BMS.ServiceHost.config	BMS.VI.ServiceHost.exe.config	BMS.ServiceHost.config	
	authentication		x509FindType="FindBySubjectName" findValue="IWHM3Service s" storeName="My" storeLocation="LocalMachine"	x509FindType="FindBySubjectName" findValue="IWHM3Service s" storeName="My" storeLocation="LocalMachine"	
	scopedCertificates\add		revocationMode="NoCheck "	revocationMode="NoCheck "	
	durableIssuedToken		targetUri="http://<ServerAddress>210:16050/STS/" x509FindType="FindBySubjectName" findValue="IWHM3STS" storeName="My" storeLocation="LocalMachine"	targetUri="http://localhost:16050/STS/" x509FindType="FindBySubjectName" findValue="IWHM3STS" storeName="My" storeLocation="LocalMachine"	
	behavior		connectionString="Data Source=<DatabaseAddres s>;Network Library=DBMSSOCN;Initial Catalog=BMS;Integrated Security=True;Pooling=true; Min Pool Size=0;Max Pool Size=250;"  identifier="SessionID"  isolationLevel="ReadCom mitted"	connectionString="Data Source=<DatabaseAddres s>;Initial Catalog=BMS;Integrated Security=True;Pooling=true; Min Pool Size=0;Max Pool Size=100;"  identifier="SessionID"  isolationLevel="ReadCom mitted"	
	DataContractSerializer		name="WindowsClientCre dentials"	name="WindowsClientCre dentials"	
	clientCredentials		maxItemsInObjectGraph="2147483647"	maxItemsInObjectGraph="2147483647"	
	windows		type="InfoWorld.Security.A uthentication.CacheClientC redentials, SecurityTokenCache"	type="InfoWorld.Security.A uthentication.CacheClientC redentials, SecurityTokenCache"	
	serviceCertificate		allowNtlm="true"	allowNtlm="true"	

Section	Configuration Key/Name	Configuration values (ex.)			Description
		Split Service		Combine Service	
		BMS.ServiceHost.config	BMS.VI.ServiceHost.exe.config	BMS.ServiceHost.config	
	defaultCertificate				
	authentication		x509FindType="FindBySubjectName" findValue="IWHM3Services" storeName="My" storeLocation="LocalMachine"	x509FindType="FindBySubjectName" findValue="IWHM3Services" storeName="My" storeLocation="LocalMachine"	
	scopedCertificates\add		revocationMode="NoCheck"	revocationMode="NoCheck"	
	behavior		targetUri="http://<ServerAddress>210:16050/STS/Windows" x509FindType="FindBySubjectName" findValue="IWHM3STS" storeName="My" storeLocation="LocalMachine"	targetUri="http://localhost:16050/STS/Windows" x509FindType="FindBySubjectName" findValue="IWHM3STS" storeName="My" storeLocation="LocalMachine"	
	DataContractSerializer		name="DataContractSerializer"	name="DataContractSerializer"	
	extensions\behaviorExtensions		maxItemsInObjectGraph="2147483647"	maxItemsInObjectGraph="2147483647"	
	add				

Section	Configuration Key/Name	Configuration values (ex.)			Description
		Split Service		Combine Service	
		BMS.ServiceHost.config	BMS.VI.ServiceHost.exe.config	BMS.ServiceHost.config	
	add		name="sqlWorkflowInstanceStorePromotion" type="BMS.Workflows.PropertyPromotionActivity.Configuration.SqlWorkflowInstanceStorePromotionElement, BMS.Workflows.PropertyPromotionActivity"	name="sqlWorkflowInstanceStorePromotion" type="BMS.Workflows.PropertyPromotionActivity.Configuration.SqlWorkflowInstanceStorePromotionElement, BMS.Workflows.PropertyPromotionActivity"	
	add		name="errorHandler" type="BMS.Workflows.CustomActivities_Utils.WFErrorHandlerElement, BMS.Workflows.CustomActivities"	name="errorHandler" type="BMS.Workflows.CustomActivities_Utils.WFErrorHandlerElement, BMS.Workflows.CustomActivities"	
	log4net		name="durableIssuedTokenClientCredentials" type="BMS.Security.Configuration.DurableIssuedTokenClientCredentialsConfigHandler, BMS.Security"	name="durableIssuedTokenClientCredentials" type="BMS.Security.Configuration.DurableIssuedTokenClientCredentialsConfigHandler, BMS.Security"	
	root	value="OFF"			set the level value to ALL or DEBUG in order to trace method

Section	Configuration Key/Name	Configuration values (ex.)			Description
		Split Service			Combine Service
		BMS.ServiceHost.config		BMS.VI.ServiceHost.exe.config	BMS.ServiceHost.config
					od entry and exit times
	level value	"SQLAppender"			
	appender-ref ref	name="FileAppender" type="log4net.Appender.FileAppender"			
	appender	name="FileAppender" type="log4net.Appender.FileAppender"			
	file	value="log-file.txt"			
	appendToFile	value="true"			
	layout	type="log4net.Layout.PatternLayout"			
	conversionPattern	value="%date [%6thread] -> %message% <-%newline"			
	appender	name="SQLAppender" type="log4netAsync.AsyncAdoNetAppender,log4netAsync"			
	bufferSize	value="1000"			
	connectionType	value="System.Data.SqlClient.SqlConnection, System.Data, Version=1.0.3300.0, Culture=neutral, PublicKeyToken=b77a5c561934e089"			
	connectionString	value="data source=<DatabaseAddress>;Network Library=DBMSSOCN;initial catalog=BMS_LOG;integrated security=SSPI;persist security info=False;Pooling=true;Min Pool Size=0;Max Pool Size=250;"			
	commandText	value="INSERT INTO Log ([Date],[Thread],[Level],[Logger],[Message],[Exception]) VALUES (@log_date, @thread, @log_level, @logger, @message, @exception)"	value="data source=<DatabaseAddress>;Network Library=DBMSSOCN;initial catalog=BMS_LOG;integrate d security=SSPI;persist security info=False;Pooling=true;Min Pool Size=0;Max Pool Size=250;"	value="data source=<DatabaseAddress >;initial catalog=LOG;integrated security=SSPI;persist security info=False;Pooling=true;Mi n Pool Size=0;Max Pool Size=100;"	
	parameter				
	parameterName	value="@log_date"			
	dbType	value="DateTime"			

Section	Configuration Key/Name	Configuration values (ex.)				Description
		Split Service			Combine Service	
		BMS.ServiceHost.config		BMS.VI.ServiceHost.exe.config	BMS.ServiceHost.config	
	layout	type="log4net.Layout.RawTimeStampLayout"				
	parameter					
	parameterName	value="@thread"				
	dbType	value="String"				
	size	value="255"				
	layout	type="log4net.Layout.PatternLayout"				
	conversionPattern	value="%thread"				
	parameter					
	parameterName	value="@log_level"				
	dbType	value="String"				
	size	value="50"				
	layout	type="log4net.Layout.PatternLayout"				
	conversionPattern	value="%level"				
	parameter					
	parameterName	value="@logger"				
	dbType	value="String"				
	size	value="255"				
	layout	type="log4net.Layout.PatternLayout"				
	conversionPattern	value="%logger"				
	parameter					
	parameterName	value="@message"				
	dbType	value="String"				
	size	value="4000"				
	layout	type="log4net.Layout.PatternLayout"				
	conversionPattern	value="%message"				
	parameter					

Section	Configuration Key/Name	Configuration values (ex.)			Description
		Split Service		Combine Service	
		BMS.ServiceHost.config		BMS.VI.ServiceHost.exe.config	BMS.ServiceHost.config
	parameterName	value="@exception"			
	dbType	value="String"			
	size	value="2000"			
	layout	type="log4net.Layout.ExceptionLayout"			
	filter	type="log4net.Filter.StringMatchFilter"			
	stringToMatch	value="00:00:00.00"			
	acceptOnMatch	value="false"			
	filter	type="log4net.Filter.StringMatchFilter"			
	stringToMatch	value="Entry"			

Section	Configuration Key/Name	Configuration values (ex.)				Description
		Split Service			Combine Service	
		BMS.ServiceHost.config	BMS.VI.ServiceHost.exe.config	BMS.ServiceHost.config		
	acceptOnMatch	value="false"				
	startup					
	supportedRuntime	version="v4.6" sku=".NETFramework,Version=v4.6.1"				
	runtime\gcServer	enabled="true"				

**Table 5-EIS Service Configuration Parameters**

File	Section	Configuration key	Configuration values (ex.)	Description
	configuration/connectionStrings/add	ConnectionString	Workstation id=vadbserver\sql2008r2;packet size=4096;data source=vadbserver\sql2008r2;persist security info=False;Initial Catalog=BMS_EIS;Integrated Security=SSPI;	Connection string for the connection to the BMS_EIS database.
EISService  Implementation. dll config	configuration/appSettings/kev	DatasetPath	DBRepository	Data Adapters (XML mapping files) path.
		OverwriteCreateEntityId	true/false	If set to true, the service generates a new unique identifier on each resource create call, otherwise, it uses the identifier received as parameter. If set to true, the service notifies linked
		NotificationIndicator	true/false	EIS services of changes produced on entities.
		UseSecurityContext	0/1	ePractice security context
		DnsIdentity	IWHM3Services	Certificate which specifies the service's dns identity.
		ReceiveIndicator	true/false	If set to true, the service accepts notification messages from linked EIS services.
		AutomaticLinkIndicator	true/false	If set to true, entities are automatically linked (associated as equivalent) across linked EIS services.
		XEISIndicator	true/false	Specifies whether the cross EIS worker should be started.
		XEISDomain	domain name	Domain of the cross EIS implementation.

File	Section	Configuration key	Configuration values (ex.)	Description
configuration/system.serviceModel/behaviors/endpointBehaviors/behavior/clientCredentials/serviceCertificate/scopedCertificates/add		SubscriptionTopic	entity	Specifies the topic of the synchronization subscription, meaning what should be synced.
		AuditProtocol	none/udp	Transfer protocol to communicate with the audit service or none if not used.
		AuditServer	auditserver	Server where the audit service resides.
		AuditPort	10000	Port of the audit service on the specified server.
		AuditSynchronIndicator	true/false	Specifies if the Audit Service should be called synchronous or asynchronous.
	targetUri			
			http://vaserver:17050/STS/Windows	URI of STS certificate.
	address			
			http://vaserver:17050/STS/mex	STS metadata exchange URL used by ServiceBinding.
	address			
			http://vaserver:17050/STS/Windows	STS URL used by WinBinding.
	baseAddress		http://vaserver:17050/QueryFunctions	EIS Query Functions service endpoint address.
	baseAddress		http://vaserver:17050/Administration	EIS Administration service endpoint address.
	baseAddress		http://vaserver:17050/EntityManagement	EIS EntityManagement service endpoint address.

File	Section	Configuration key	Configuration values (ex.)	Description
	el/services/service/host/baseAddress/add			
	configuration/system.serviceModule/services/service/host/baseAddress/add	baseAddress	http://vaserver:17050/ServiceMetadataManagement	EIS ServiceMetadataManagement service endpoint address.
	configuration/system.serviceModule/services/service/host/baseAddress/add	baseAddress	http://vaserver:17050/BulkEntityManagement	EIS Bulk BulkEntityManagement service endpoint address.
	configuration/system.serviceModule/services/service/host/baseAddress/add	baseAddress	http://vaserver:17050/Subscribe	EIS Subscribe service endpoint address.
	configuration/system.serviceModule/services/service/host/baseAddress/add	baseAddress	http://vaserver:17050/LinkAlgorithmAdministration	EIS LinkAlgorithmAdministration service endpoint address.
	configuration/system.serviceModule/services/service/host/baseAddress/add	baseAddress	http://vaserver:17050/EIS/SubscriptionAdministration	EIS SubscriptionAdministration service endpoint address.
	configuration/system.serviceModule/services/service/host/baseAddress/add	baseAddress	http://vaserver:17050/Receive	EIS Receive service endpoint address.
	configuration/system.serviceModule/services/service/host/baseAddress/add	baseAddress	http://vaserver:17050/EIS/MessageAdministration	EIS MessageAdministration service endpoint address.
	configuration/system.serviceModule/services/service/host/baseAddress/add	baseAddress	http://vaserver:17050/EIS/AuthorizationSubscriber	EIS AuthorizationSubscriber service endpoint address.

File	Section	Configuration key	Configuration values (ex.)	Description
	add			
Connections.xml	MyConnections/ connectionString	connectionString	workstation id= vadbserver\sql2008r2;packet size=4096;data source= vadbserver\sql2008r2;persist security info=False;Initial Catalog=BMS_EIS;Integrated Security=SSPI;	Connection string for the connection to the BMS_EIS database.

**Table 6-EVS Service Configuration Parameters**

File	Section	Configuration key	Configuration values (ex.)	Description
MessageImpl.dll. config	configuration/ appSettings/ key	DatasetPath	DBRepository	Data Adapters (XML mapping files) path.
		ApplicationFolder	D:\CTS\CTSImport	String path to application folder.
		SqlScriptsFolder	SqlScrips	SQL scripts folder name.
		TextFilesFolder	TextFiles	Text files folder name.
		PackageFilesFolder	PackageFiles	Package files folder name.
		CodeMappingTempTable	dbo.TempMapping	The mapping temporary table name.
		TemporaryFolder	Temp	Temporary folder name.
		SubscriptionTopic	cts	Specifies the topic of the synchronization subscription, meaning what should be synced.
		NotificationIndicator	true/false	Notification indicator.
		BulkInsertBatchSize	1000	Maximum number of processed records in one step.
		DnsIdentity	IWHM3Services	Certificate which specifies the service's dns identity.
		StartSecurityEndpoints	true/false	Specifies if the secure endpoints are to be started.
		http://localhost:17050/CTSImport	EVS	EVS import from excel key.

File	Section	Configuration key	Configuration values (ex.)	Description
		http://localhost:17050/CTSExport	EVS	EVS export to excel key.
	configuration/system.serviceModel/services/service/host/baseAddresses/add	baseAddress baseAddress	http://vaserver:17050/CTS VocabularyRuntime https://vaserver:17706/	CTS VocabularyRuntime service endpoint address (HTTP Protocol). CTS VocabularyRuntime service endpoint address (HTTPS Protocol).

File	Section	Configuration key	Configuration values (ex.)	Description
	add		CTSVocabularyRuntime	
	configuration/system.serviceModel/services/service/host/baseAddresses/add	baseAddress	http://vaserver:17050/CTSMapping	CTS Mapping service endpoint address (HTTP Protocol).
		baseAddress	https://vaserver:17706/CTSMapping	CTS Mapping service endpoint address (HTTPS Protocol).
	configuration/system.serviceModel/services/service/host/baseAddresses/add	baseAddress	http://vaserver:17050/CTSVocabularyBrowse	CTS VocabularyBrowse service endpoint address (HTTP Protocol).
		baseAddress	https://vaserver:17706/CTSVocabularyBrowse	CTS VocabularyBrowse service endpoint address (HTTPS Protocol).
	configuration/system.serviceModel/services/service/host/baseAddresses/add	baseAddress	http://vaserver:17050/CTSMessagRuntime	CTS MessageRuntime service endpoint address (HTTP Protocol).
		baseAddress	https://vaserver:17706/CTSMessagRuntime	CTS MessageRuntime service endpoint address (HTTPS Protocol).
	configuration/system.serviceModel/services/service/host/baseAddresses/add	baseAddress	http://vaserver:17050/CTSMessagBrowse	CTS MessageBrowse service endpoint address (HTTP Protocol).
		baseAddress	https://vaserver:17706/CTSMessagBrowse	CTS MessageBrowse service endpoint address (HTTPS Protocol).
	configuration/system.serviceModel/services/service/host/baseAddresses/add	baseAddress	http://vaserver:17050/CTSMessagEdit	CTS MessageEdit service endpoint address (HTTP Protocol).
		baseAddress	https://vaserver:17706/CTSMessagEdit	CTS MessageEdit service endpoint address (HTTPS Protocol).
	configuration/	baseAddress	http://vaserver:17050/CTSVocabularyEdit	CTS VocabularyEdit service endpoint address (HTTP Protocol).

File	Section	Configuration key	Configuration values (ex.)	Description
configuration/system.serviceModel/services/service/host/baseAddresses/add	system.serviceModel/services/service/host/baseAddresses/	baseAddress	https://vaserver:17706/CTSvocabularyEdit	CTS VocabularyEdit service endpoint address (HTTPS Protocol).
	configuration/system.serviceModel/services/service/host/baseAddresses/add	baseAddress	http://vaserver:17050/CTSMappingEdit	CTS MappingEdit service endpoint address (HTTP Protocol).
		baseAddress	https://vaserver:17706/CTSMappingEdit	CTS MappingEdit service endpoint address (HTTPS Protocol).
	configuration/system.serviceModel/services/service/h	baseAddress	http://vaserver:17050/Xaml	XAML service endpoint address.

File	Section	Configuration key	Configuration values (ex.)	Description
configuration/system.serviceModel/services/service/host/baseAddresses/add	ost/baseAddresses/add			
	configuration/system.serviceModel/services/service/host/baseAddresses/add	baseAddress	http://vaserver:17050/EVSWrapper	EVS Wrapper service endpoint address.
	configuration/system.serviceModel/services/service/host/baseAddresses/add	baseAddress	http://vaserver:17050/CTSImport	CTS Import service endpoint address.
	configuration/system.serviceModel/services/service/host/baseAddresses/add	baseAddress	http://vaserver:17050/CTSExport	CTS Export service endpoint address.
	configuration/system.serviceModel/services/service/host/baseAddresses/add	baseAddress	http://vaserver:17050/CTSEditBulk	CTS EditBulk service endpoint address.
	configuration/system.serviceModel/services/service/host/baseAddresses/add	baseAddress	http://vaserver:17050/CTS/SubscriptionAdministration	CTS Subscription Administration service endpoint address.

File	Section	Configuration key	Configuration values (ex.)	Description
	configuration/system.serviceModel/services/service/host/baseAddresses/add	baseAddress	http://vaserver:17050/CTS/MessageAdministration	CTS Message Administration service endpoint address.
	configuration/system.serviceModel/bindings/wsFederationHttpBinding/binding/security/message/issuerMetadata	address	http://vaserver:17050/STS/mex	STS metadata exchange URL used by ServiceBinding.

File	Section	Configuration key	Configuration values (ex.)	Description
	configuration/system.serviceModel/bindings/wsFederationHttpBinding/binding/security/message/issuer	address	http://vaserver:17050/STS/Windows	STS URL used by WinBinding.
EVSWrapper.dll.config	configuration/system.serviceModel/services/service/host/baseAddresses/add	baseAddress	http://vaserver:17050/EVSWrapper	EVS Wrapper service endpoint address.

**Table 7-PAP Service Configuration Parameters**

File	Section	Configuration key	Configuration values (ex.)	Description
PolicyAdministration Point.dll.config	key	DefaultResourceRoot	VA	Default root for identifiers.
		DatasetPath	DBRepository	Data Adapters (XML mapping files) path.
		su	hmcomplus	Specifies the super user of the application.
		SubscriptionTopic	Authorization	Specifies the topic of the synchronization subscription, meaning what should be synced.
		DnsIdentity	IWHM3Services	Certificate which specifies the service's dns identity.
		AuditProtocol	none/udp	Transfer protocol to communicate with the audit service or none if not used.
		AuditServer	auditserver	Server where the audit service resides.
		AuditPort	10000	Port of the audit service on the specified server.
	configuration/ connectionStrings/ add	connectionString	workstation id= vadbserver\sql2008\2;packet size=4096;data source= vadbserver\sql2008\2;persist security info=False;Initial Catalog=BMS_AUTHZ;Integrated Security=SSPI;	Connection string for the connection to the BMS_AUTHZ database.
	configuration/syste m.serviceModel/ bindings/ wsFederationHttpBi	address	http://vaserver:17050/STS/ Windows	STS URL used by UpnBinding.
	nding/binding/securi ty/message/issuer			

File	Section	Configuration key	Configuration values (ex.)	Description
configuration/system.serviceModel/bindings/wsFederationHttpBinding/binding/security/message/issuer	address	http://vaserver:17050/STS/Windows	STS URL used by WinBinding.	
	baseAddress	http://vaserver:17050/PAP	PAP service endpoint address.	
	baseAddress	http://vaserver:17050/AuthorizationPublisher	AuthorizationPublisher service endpoint address.	
	baseAddress	http://vaserver:17050/PAP/MessageAdministration	MessageAdministration service endpoint address.	
	baseAddress	http://vaserver:17050/PAP/SubscriptionAdministration	SubscriptionAdministration service endpoint address.	
	address	http://vaserver:17050/PDP/Request	PDP request client endpoint address.	
	targetUri	http://vaserver:17050/STS/Windows	URI of STS certificate.	
Connections.xml	MyConnections/MyConnection/	connectionString	workstation id=vadbserver\sql2008r2;packet	Connection string for the connection to the BMS_AUTHZ database.

File	Section	Configuration key	Configuration values (ex.)	Description
	ConnectionString		size=4096;data source=vadbserver\sql2008r2;persist security info=False;Initial Catalog=BMS_AUTHZ;Integrated Security=SSPI;	

**Table 8-PDP Service Configuration Parameters**

File	Section	Configuration key	Configuration values (ex.)	Description
PolicyDecisionPoint.dll.config	configuration/appSettings/key	DefaultResourceRoot	VA	Default root for identifiers.
	configuration/	ConnectionString	Data source=vadbserver\sql2008;InitialCatalog=BMS_AUTHZ;Persist Security Info=False;Integrated Security=SSPI	Connection string for the connection to the BMS_AUTHZ database.
	system.serviceModel/bindings/wsFederationHttpBinding/binding/security/message/issuerMetadata	address	http://vaserver:17050/STS/mex	STS metadata exchange URL used by ServiceBinding.
	configuration/system.serviceModel/services/service/host/baseAddresses/add	baseAddress	http://vaserver:17050/PDP	PDP service endpoint address.
	configuration/system.serviceModel/services/service/host/baseAddresses/add	baseAddress	http://vaserver:17050/PDP/Request	PDP Request service endpoint address.

**Table 9-RS Service Configuration Parameters**

<b>File</b>	<b>Section</b>	<b>Configuration key</b>	<b>Configuration values (ex.)</b>	<b>Description</b>
RS.ServiceImplementation.	configuration/appSettings/	DefaultResourceRoot	VA	Default root for identifiers.
		ReportingServicesURL	http://vaserver:90/Report	Reporting services URL address.
dll.config	key		Server/ReportService2005.asmx	
		RootFolderName	Reporting Service	Reports root folder in the reporting services.
		AuditProtocol	none/udp	Transfer protocol to communicate with the audit service or none if not used.
		AuditServer	auditserver	Server where the audit service resides.
		AuditPort	10000	Port of the audit service on the specified server.
	configuration/system.serviceModel/client/endpoint	address	http://vaserver:17050/PDP/Request	PDP request client endpoint address.
	configuration/system.serviceModel/bindings/wsFederationHttpBinding/binding/security/message/issuerMetadata	address	http://vaserver:17050/STS/mex	STS metadata exchange URL used by ServiceBinding.
	configuration/system.serviceModel/bindings/wsFederationHttpBinding/binding/security/message/issuer	address	http://vaserver:17050/STS/Windows	URL of CustomBinding_IAuthenticationService.
	configuration/system.serviceModel/services/service/host/baseAddresses/add	baseAddress	http://vaserver:17050/RS	RS service endpoint address.

File	Section	Configuration key	Configuration values (ex.)	Description
	configuration/system.serviceModel/behaviors/endpointBehaviors/behavior/clientCredentials/serviceCertificate/scopedCertificates/add	targetUri	http://vaserver:17050/STS/Windows	URI of STS certificate.

**Table 10-STS Service Configuration Parameters**

File	Section	Configuration key	Configuration values (ex.)	Description
SecureToken Service.dll.config	configuration/appSettings/key	Delay	0:01:00	Sleep interval between the retries to insert the superusers in the database.
		TokenTTLInMinutes	1442	Time to live of the security token, in minutes.
		STSCertificateStoreName	My	Specifies the name of the X.509 certificate store to open.
		STSCertificateStoreLocation	LocalMachine	Specifies the location of the X.509 STS certificate store.
		STSCertificateFindType	FindBySubjectName	Specifies the type of value the X509Certificate2Collection.Find method searches for.
		STSCertificateFindValue	IWHM3STS	STS Certificate name.
		ServiceCertificateStoreName	My	Specifies the name of the X.509 certificate store to open.

File	Section	Configuration key	Configuration values (ex.)	Description
C:\Program Files\Microsoft\Windows\Communication Server\BMS\BMS.exe.config		su	Domain qualified user names, comma separated.	Usernames of all the super users in the application.
		domains	VA VA	Comma separated list of root extension values for the application's domains.
	configuration/connectionStrings/add	connectionString	workstation id=vadbserver\sql2008r2;packet size=4096;data source=vadbserver\sql2008;persist security info=False;Initial Catalog=BMS_AUTHZ;Integrated Security=SSPI;	Connection string for the connection to the BMS_AUTHZ database.
	configuration/system.serviceModel/services/service/host/baseAddresses/add	baseAddress	http://vaserver:17050/STS	STS service endpoint address.
C:\Program Files\Microsoft\Windows\Communication Server\BMS\BMSAuthsvc.exe.config	configuration/system.serviceModel/services/service/baseAddress	baseAddress	http://vaserver:17050/authsvc	Authsvc service endpoint address.
	configuration/system.serviceModel/bindings/wsFederationHttpBinding/binding/security	address	http://vaserver:17050/STS/mex	STS metadata exchange URL used by ServiceBinding.
	configuration/system.serviceModel/bindings/wsFederationHttpBinding/binding/security/message/issuer	address	http://vaserver:17050/STS/Windows	URL of STS used by WindowsBinding.
	configuration/system.serviceModel/bindings/wsFederationHttpBinding/binding/security/message/issuer/identity/userPrincipalName	value	VAUUser@domain.com	Name of the user under which the service is running.

<b>File</b>	<b>Section</b>	<b>Configuration key</b>	<b>Configuration values (ex.)</b>	<b>Description</b>
	configuration/ system.serviceMod el/behaviors/service Behaviors/behavior/ serviceMetadata	httpGetUrl	http://vaserver:17050/STS/mex	Metadata exchange address of ServiceSTSBehavior.

**Table 11-Win ServiceHost Configuration Parameters**

File	Section	Configuration key	Configuration values (ex.)	Description
WinServiceHost.exe.config	configuration/appSettings/key	LocalServer	yes/no	ePractice remoting flag. Only used with yes.
		UseSecurityContext	0/1	Flag which specifies if ePractice uses the security context.
		AuditProtocol	none/udp	Transfer protocol to communicate with the audit service or none if not used.
		ServiceStartupTimeoutSecondsAdd	90	Time in seconds to wait for the services to start
		AuditServer	auditserver	Server where the audit service resides.
		AuditPort	10000	Port of the audit service on the specified server.
		ServiceCertificateStoreName	My	Specifies the name of the X.509 certificate store to open.
		ServiceCertificateStoreLocation	LocalMachine	Specifies the location of the X.509 services' certificate store.
		ServiceCertificateFindType	FindBySubjectName	Specifies the type of value the X509Certificate2Collection.Find method searches for.
		ServiceCertificateFindValue	IWHM3Services	Services' Certificate name.

**Table 12-WMI User Group Configuration Parameters**

File	Section	Configuration key	Configuration values (ex.)	Description
WMI_UserGroup.exe	configuration/appSettings/key	DatasetPath	DBRepository	Data Adapters (XML mapping files) path.
		LocalMachineName	Localhost	Name of the host where WMI_UserGroup will run.
		IsRunningOnLocalMachine	true/false	Specify if WMI_UserGroup will run on local machine or not.
Connections.xml	MyConnections/MyConnection/ConnectionString	ConnectionString	packet size=4096;data source=vadbservice\sq2008r2;persist security info=False;Initial Catalog=BMS_DW;Integrated Security=SSPI;connection timeout = 600	Connection string for the connection to the BMS_DW database.

**Table 13-Policy Manager Configuration Parameters**

File	Section	Configuration key	Configuration values (ex.)	Description
configuration/appSettings/key	configuration/appSettings/key	DefaultResourceRoot	VA	Default root for identifiers.
		AuditProtocol	none/udp	Transfer protocol to communicate with the audit service or none if not used.
		AuditServer	auditserver	Server where the audit service resides.
		AuditPort	10000	Port of the audit service on the specified server.
system.serviceModel/bindings/wsFederationHttpBinding/binding/security/message/issuer	address	http://vaserver:17050/STS/	STS address used by wsFederationBinding binding	

File	Section	Configuration key	Configuration values (ex.)	Description
PolicyManager.exe.config	configuration/system.serviceModel/behaviors/endpointBehaviors/behavior/clientCredentials/scopedCertificates/add	targetUri	http://vaserver:17050/STS/	STS address of STS certificate.
	configuration/system.serviceModel/client/endpoint	address	http://vaserver:17050/PAP	PAP client endpoint address.
	configuration/system.serviceModel/client/endpoint	address	http://vaserver:17050/AuthorizationPublisher	AuthorizationPublisher client endpoint address.
PolicyEditor.dll.config	configuration/system.serviceModel/client	address	http://vaserver:17050/PAP	PAP client endpoint address.

**Table 14-BMS Web Configuration Parameters**

File	Section	Configuration key	Configuration values (ex.)	Description
Web.config	configuration/appSettings/	webpages:Version	1.0.0.0	Version of the web site.
		ClientValidationEnabled	true/false	Gets or sets a value that indicates whether client-side validation is enabled.
	key	UnobtrusiveJavaScriptEnabled	true/false	Gets or sets a value that indicates whether unobtrusive JavaScript is enabled.
		ReportsPath	/BMS	Path of the reports in the reporting services.
		BMS.EVSDictionaryCacheSize	512	Cache size for the vocabulary service, representing the number of concepts cached.
		VAURL	http://vaww.esm.infoshare.va.gov/PMIC/Projects/BMS/Implement/default.aspx	BMS Sharepoint Site.

File	Section	Configuration key	Configuration values (ex.)	Description
		TICKETURL	http://www.esm.infoshare.va.gov/PMIC/Projects/BMS/Implement/HDProcess/default.aspx	Enter a defect and enhancement ticket.
		WhiteboardRefreshRate	60	Time in seconds of refresh rate of the whiteboard page.
		THRESHOLD	0	Threshold value used to compare wait time value of the patient from the Patients Pending Placement List in order to display an alert on the Patients Pending Placement List.
		aspnet:MaxHttpCollectionKeys	2000	Maximum number of asp.net collection keys.
		WhiteboardAjaxRefreshRate	180	Time in seconds of AJAX refresh rate of the whiteboard page.
		WhiteboardRealRefreshRate	60	Time in minutes of standard refresh rate of the whiteboard page.
		HomePageRefreshRate	300	Time in seconds of refresh rate of the home page.
		BMS_EIS_GET_ENTITY_FILTR_PAGE_SIZE	1000	Number of records queried that are brought from EIS in one page.
		BMS_EVS_GET_CONCEPT_PAGE_SIZE	1000	Number of records queried that are brought from EVS in one page.
		SmtpHost	VA_MAIL_SERVER	Mail Server host.
		DisplayDetailedErrorMessage	true/false	If set to true displays detailed error message, otherwise displays a generic message ("Please contact BMS administrator.").

File	Section	Configuration key	Configuration values (ex.)	Description
		Is_IIS_Single_Instance	true/false	If set to true a single IIS instance is used. If set to false multiple IIS instances are used (web farm scenario).
		ProxyPoolMaxCount	100	The maximum number of proxies in the pool.
		MdwsEndpointUrl_1	http://mdws_server:81/QuerySvc.asmx	MDWS instance URL address.
		MdwsEndpointUrl_2	http://mdws_server:82/QuerySvc.asmx	MDWS instance URL address.

File	Section	Configuration key	Configuration values (ex.)	Description
	configuration/system.serviceModel/bindings/wsFederationHttpBinding/binding/security/message/issuer	address	http://vaserver:17050/STS/Windows	STS Windows address used by WindowsBinding.
	configuration/system.serviceModel/bindings/wsFederationHttpBinding/binding/security/message/issuer	address	http://vaserver:17050/STS/	STS address used by WSFederationHttpBinding_Authenticated Service binding.
	configuration/system.serviceModel/client/endpoint	address	http://vaserver:17050/authsvc/upnidentity	Security Authentication client endpoint address.
	configuration/system.serviceModel/client/endpoint	address	http://vaserver:17050/RS	Reporting Services client endpoint address.
	configuration/system.serviceModel/client/endpoint	address	http://vaserver:17050/QueryFunctions	EIS QueryFunctions client endpoint address.
	configuration/system.serviceModel/client/endpoint	address	http://vaserver:17050/QueryFunctions	EIS QueryFunctions Windows authentication client endpoint address.
	configuration/system.serviceModel/client/endpoint	address	http://vaserver:17050/EntityManagement	EIS EntityManagement client endpoint address.
	configuration/system.serviceModel/	address	http://vaserver:17050/EntityManagement	EIS EntityManagement Windows authentication client endpoint address.

File	Section	Configuration key	Configuration values (ex.)	Description
client/endpoint				
	configuration/system.serviceModel/client/endpoint	address	http://vaserver:17050/PAP	PAP client endpoint address.
	configuration/system.serviceModel/client/endpoint	address	http://vaserver:17050/PAP	PAP Windows authentication client endpoint address.

File	Section	Configuration key	Configuration values (ex.)	Description
configuration/system.serviceModel/client/endpoint	address	http://vaserver:17050/PDP	PDP client endpoint address.	
	address	http://vaserver:17050/PDP	PDP Windows authentication client endpoint address.	
	address	http://vaserver:17050/CTS VocabularyRuntime	CTS VocabularyRuntime client endpoint address.	
	address	http://vaserver:17050/CTS VocabularyBrowse	CTS VocabularyBrowse client endpoint address.	
	address	http://vaserver:17050/CTS MessageBrowse	CTS MessageBrowse client endpoint address.	
	address	http://vaserver:17050/CTS MessageRuntime	CTS MessageRuntime client endpoint address.	
	address	http://vaserver:17050/CTS MessageEdit	CTS MessageEdit client endpoint address.	
	address	http://vaserver:17050/CTS VocabularyEdit	CTS VocabularyEdit client endpoint address.	
	address	http://vaserver:17050/BMS ConfigurationOperations	BMS ConfigurationOperations client endpoint address.	
	address	http://vaserver:17050/BMS ConfigurationOperations	BMS ConfigurationOperations Windows authentication client endpoint address.	

File	Section	Configuration key	Configuration values (ex.)	Description
	configuration/system.serviceModel/client/endpoint	address	http://vaserver:17050/BMSQuery	BMS Query client endpoint address.
	configuration/system.serviceModel/client/endpoint	address	http://vaserver:17050/BMSOperations	BMS Operations client endpoint address.
	configuration/system.serviceModel/client/endpoint	address	http://vaserver:17050/TransferWF	Transfer workflow client endpoint address.
	configuration/system.serviceModel/client/endpoint	address	http://vaserver:17050/BMSWF	BMS workflow client endpoint address.
	configuration/system.serviceModel/client/endpoint	address	http://vaserver:17050/WaitingListWF	Patients Pending Placement List workflow client endpoint address.
	configuration/system.serviceModel/client/endpoint	address	http://vaserver:17050/BedCleanWF	Bed clean workflow client endpoint address.
	configuration/system.serviceModel/client/endpoint	address	http://vaserver:17050/BedUnavailableWF	Bed Unavailable workflow client endpoint address.
	configuration/system.serviceModel/client/endpoint	address	http://vaserver:17050/VistaQuery	VistA Query client endpoint address.
	configuration/system.serviceModel/client/endpoint	address	http://vaserver:17050/VistaQuery	VistA Query Windows authentication client endpoint address.

## 2.4 Scheduled Windows and SQL Jobs Configuration

BMS runs one Windows Scheduled task: BMS – WMI\_UserGroup and two SQL Jobs in order to bring data into the data warehouse (BMS\_DW database): BMS - Reports Full and BMS – Reports Incremental. More information about BMS databases can be referenced from [Section 3.3](#).

### 2.4.1 BMS Reports Full


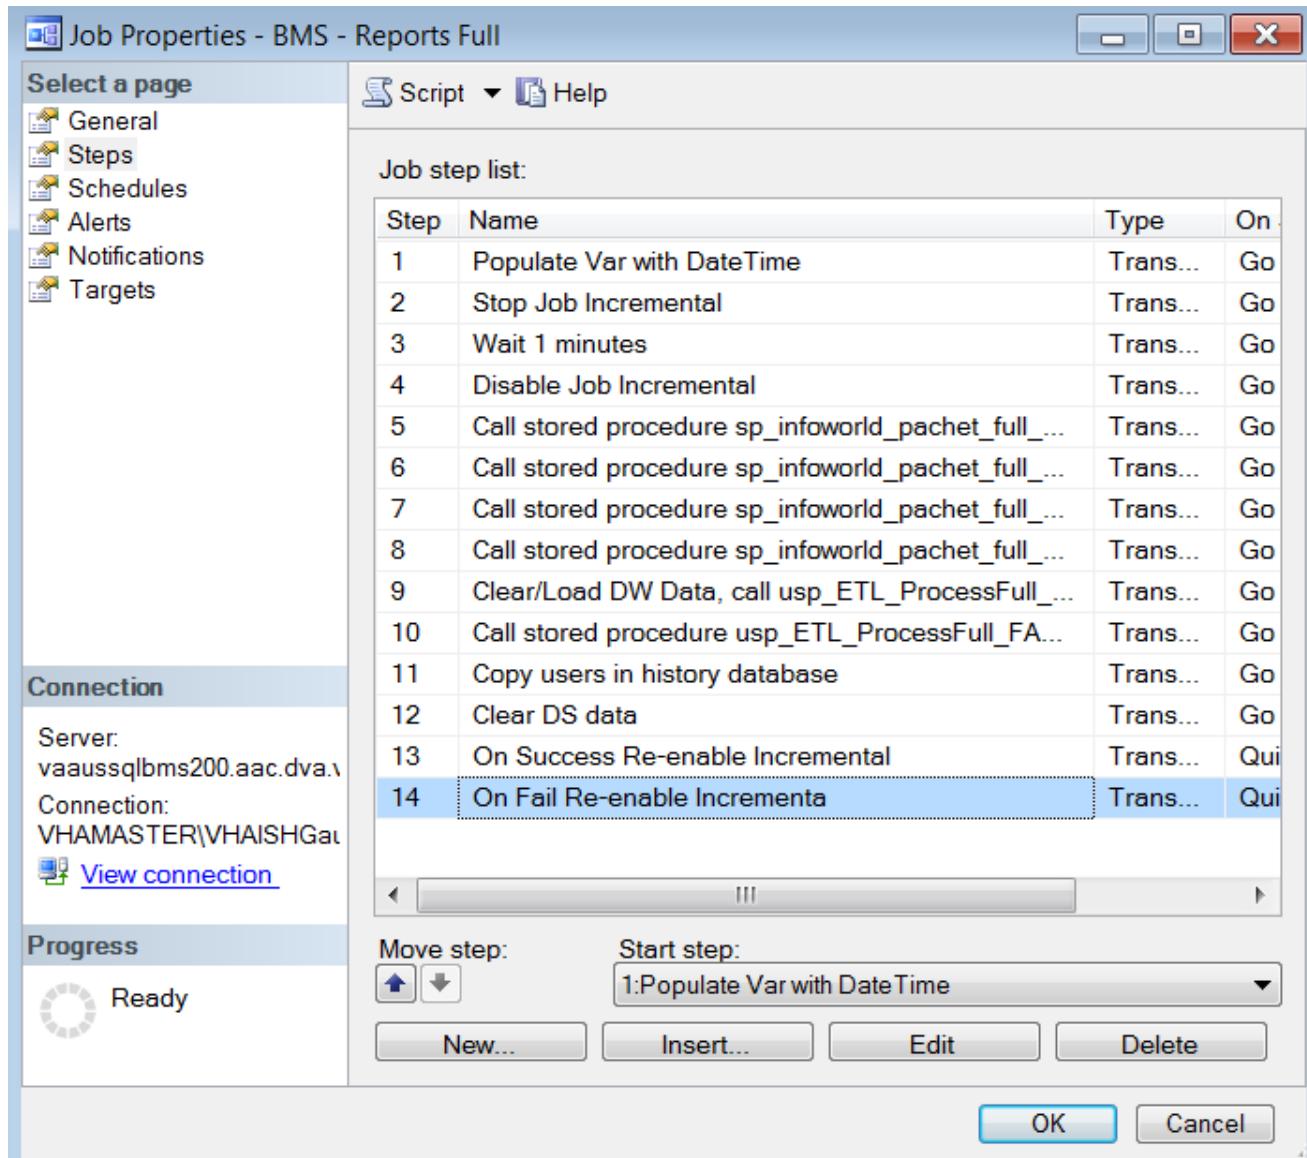


Figure 2-BMS-Report Full Job

The job's steps can be seen in the figure above and most of them execute stored procedures. At the beginning of the process, the operations are done between the source databases and the destination database, which is BMS\_DS in our case.

Each step is described below:

**Step 1.** Start job full: this is only an informative step for the log file.

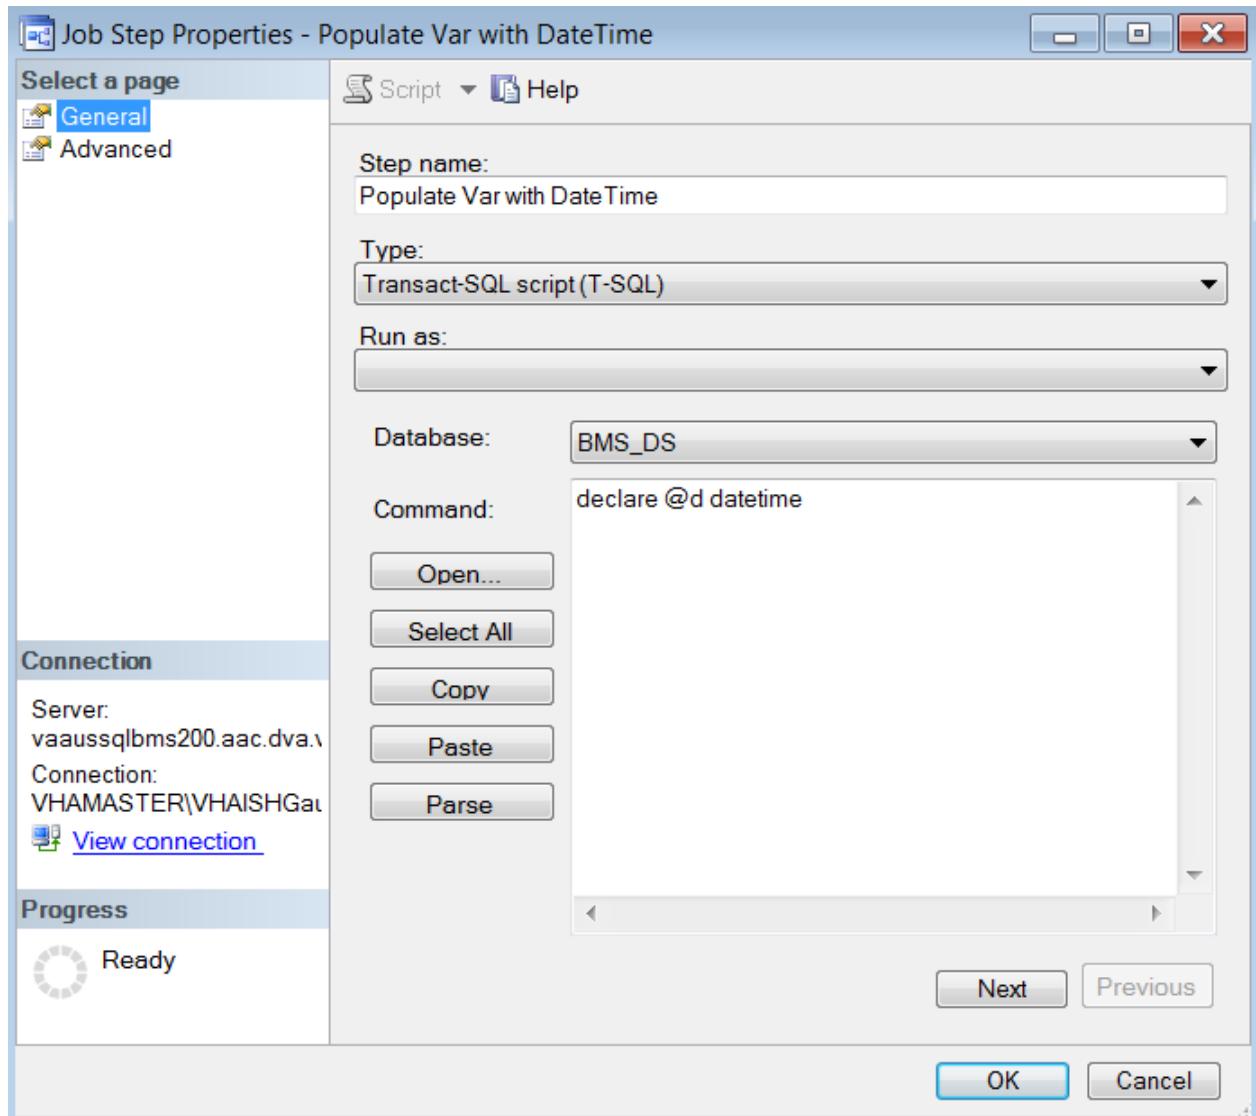

**Figure 3-BMS-Start Full Job**

**Step 2.** Check state job incremental: it checks the state of the BMS incremental and attempts to stop the incremental job.


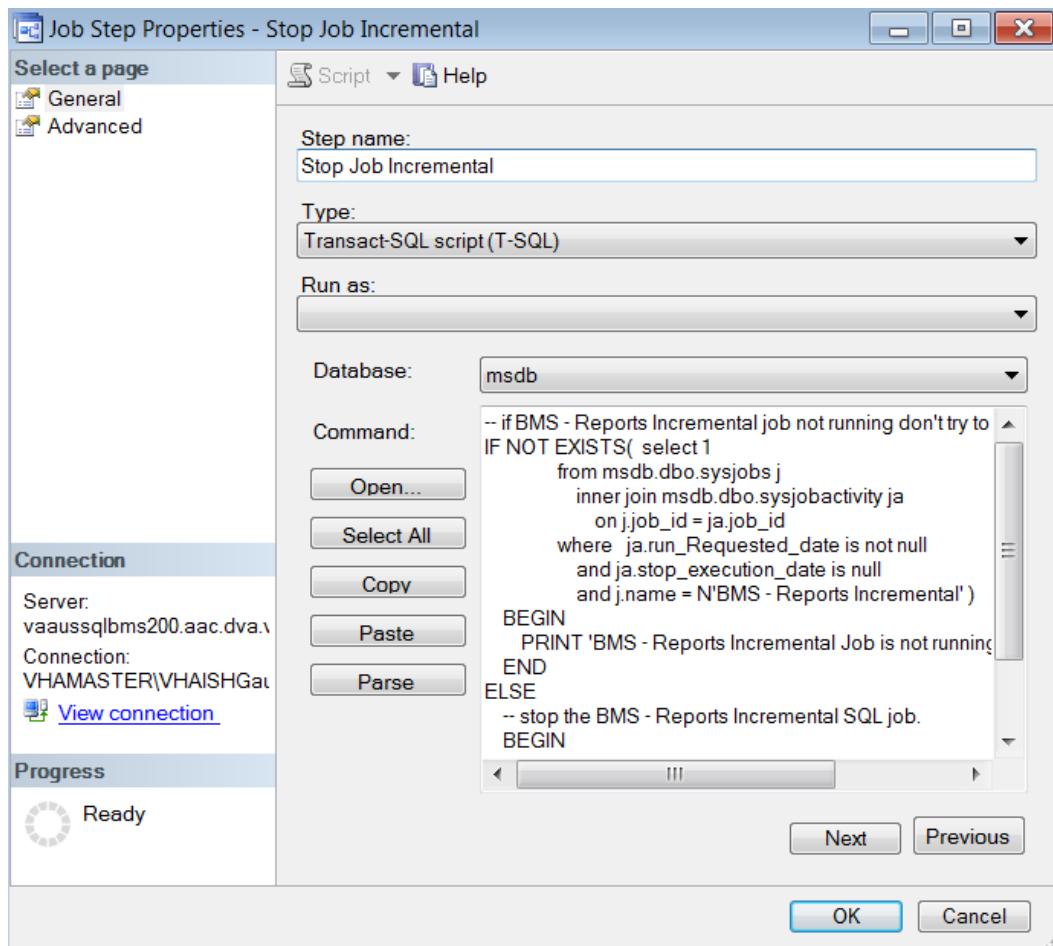


Figure 4-BMS-Check State Job Incremental

**Step 3.** Waits 1 min for incremental job to stop:

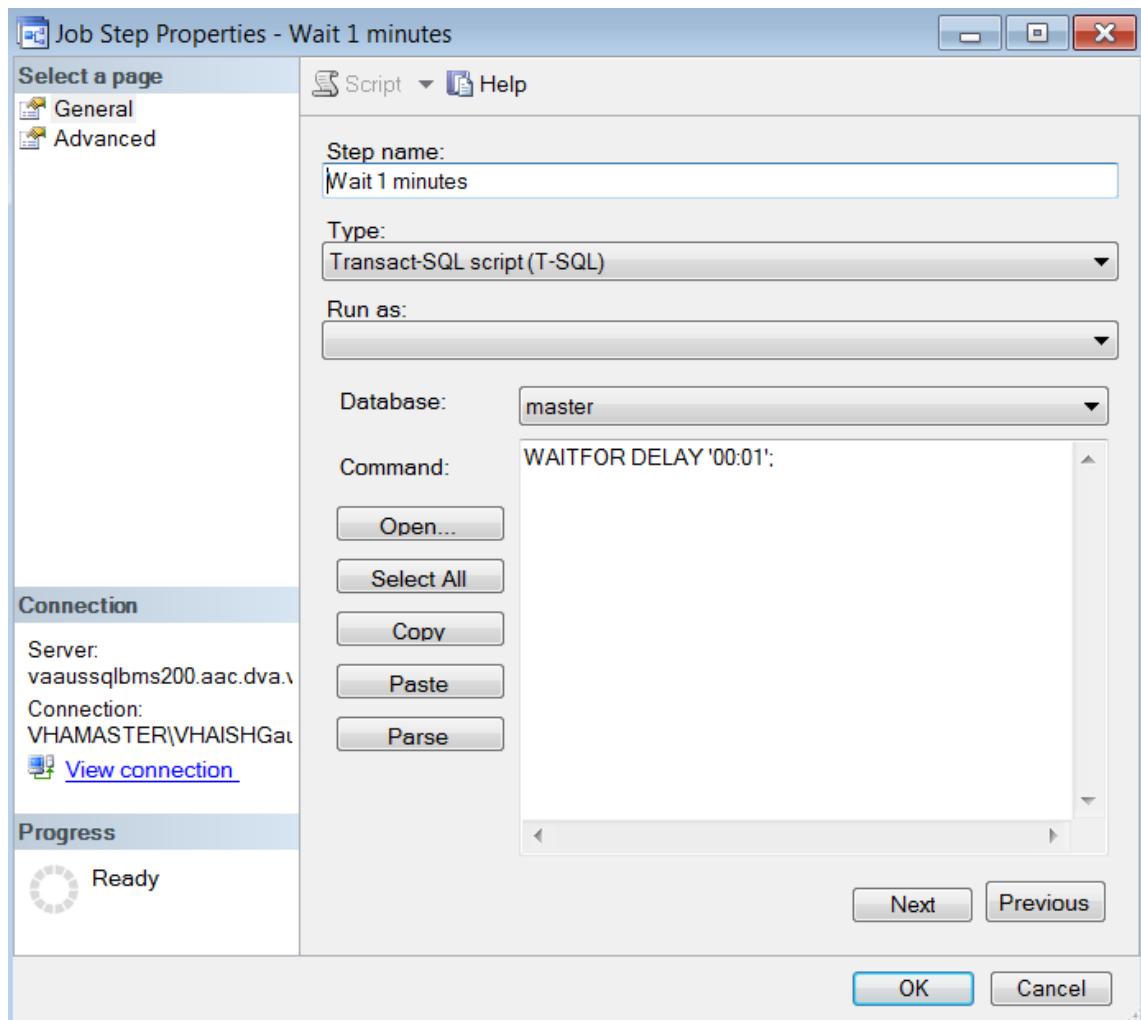

**Figure 5-BMS-Waits 1 Min for Incremental Job to stop**

**Step 4.** Disable Incremental Job:

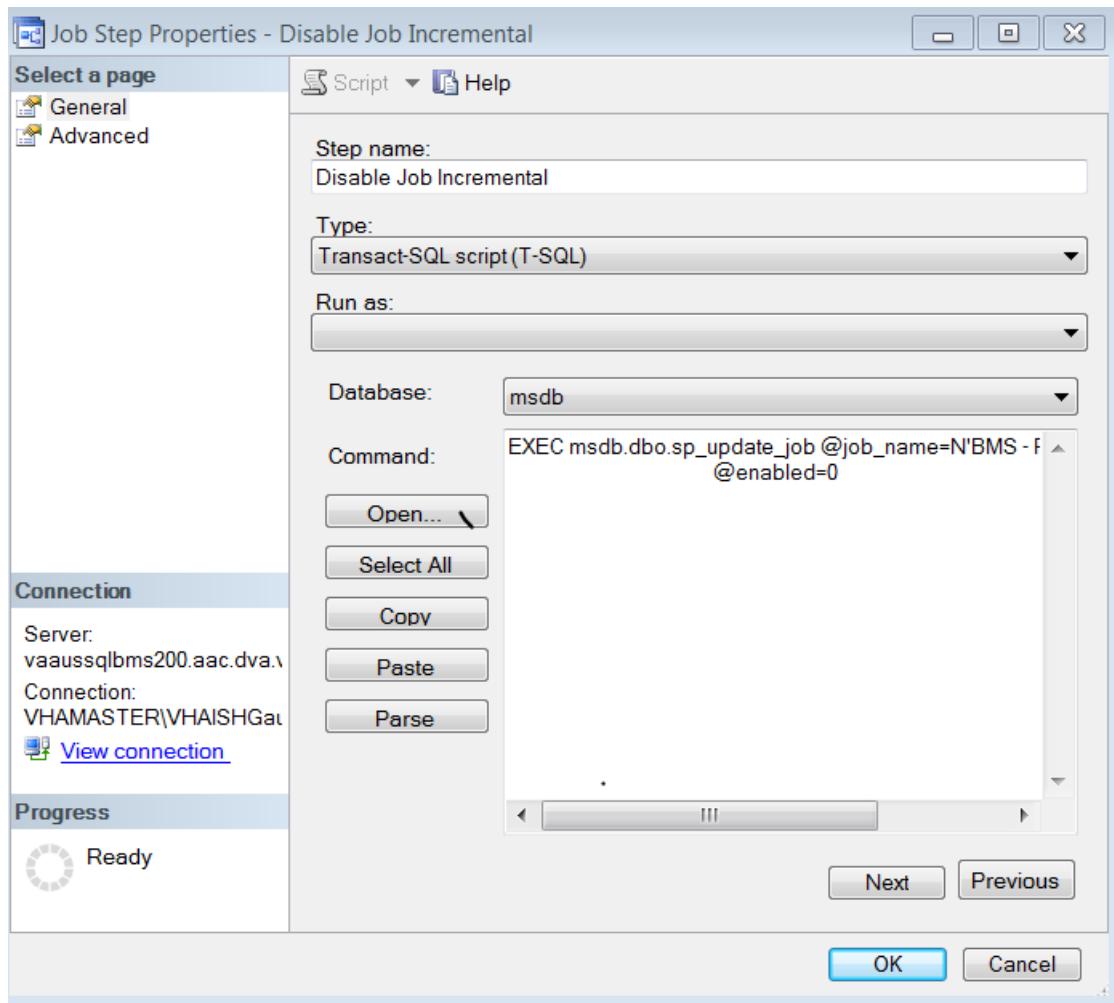


Figure 6-BMS-Check State Job Incremental

**Step 5.** Call stored procedure sp\_infoworld\_pachet\_full\_BMS\_AUTHZ:

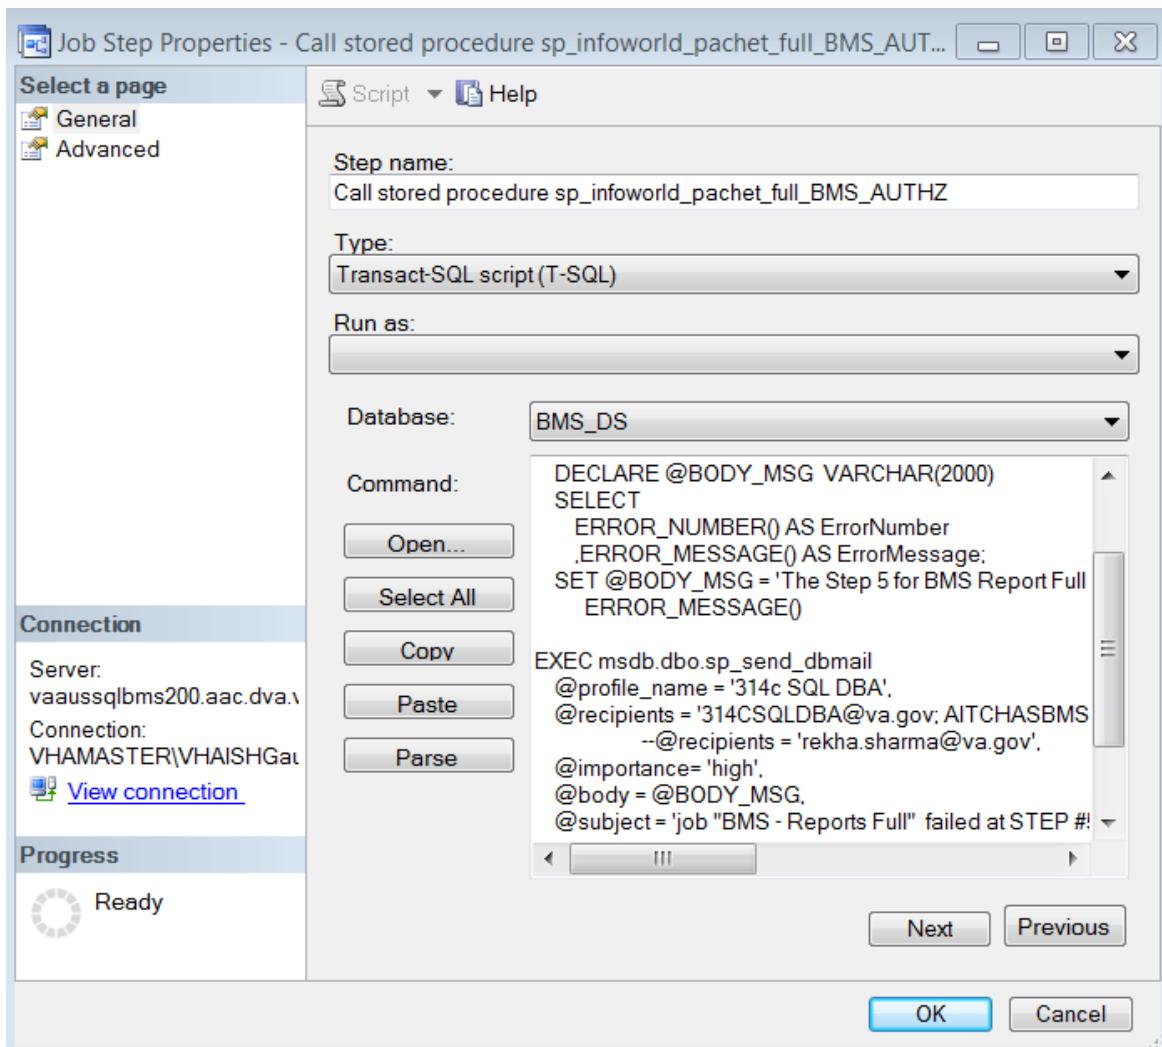


Figure 7-BMS-Job Step Properties

**Step 6.** Call stored procedure sp\_infoworld\_pachet\_full\_BMS

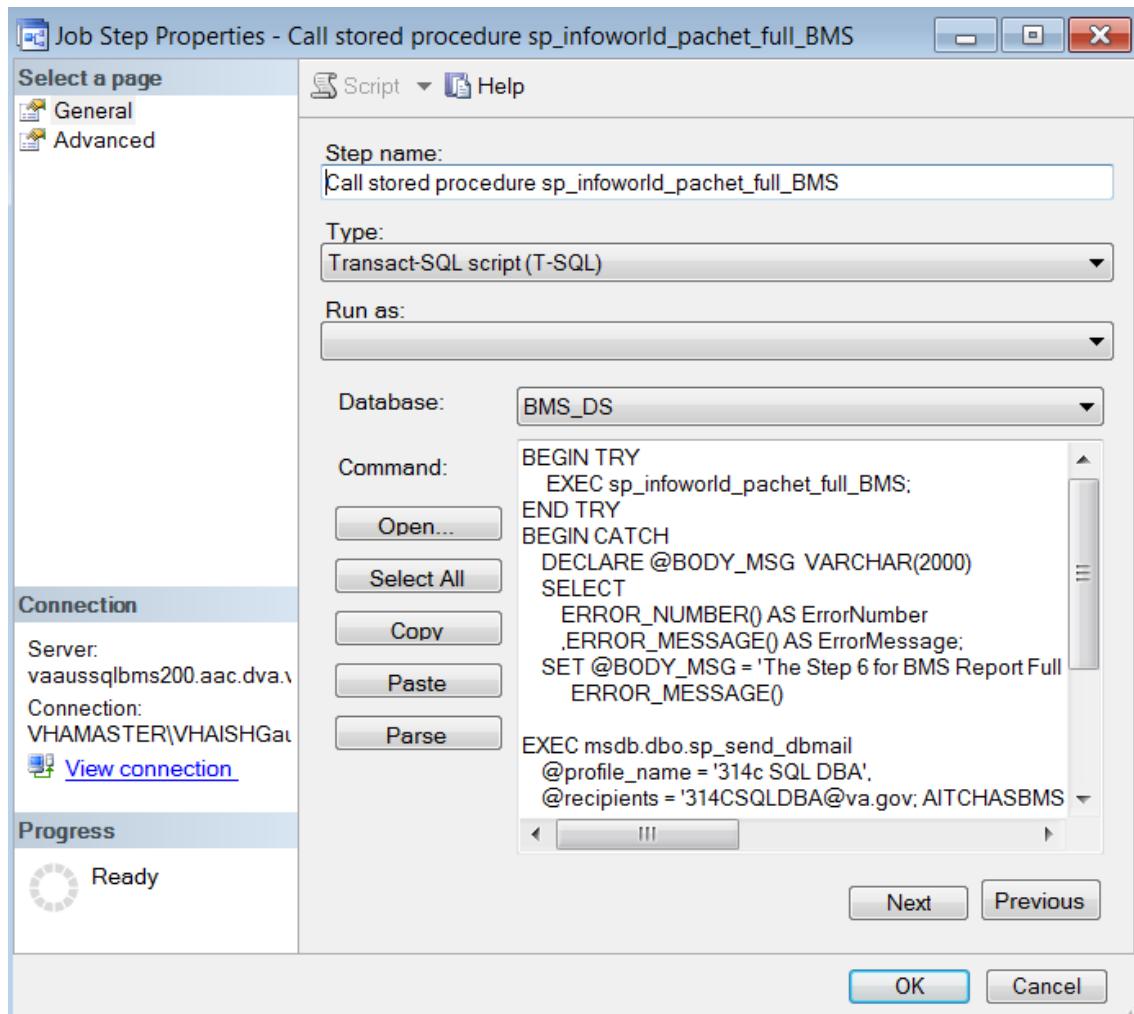


Figure 8- BMS- Job Step Properties-Call Stored Procedure

**Step 7.** Call stored procedure sp\_infoworld\_pachet\_full\_BMS\_EIS


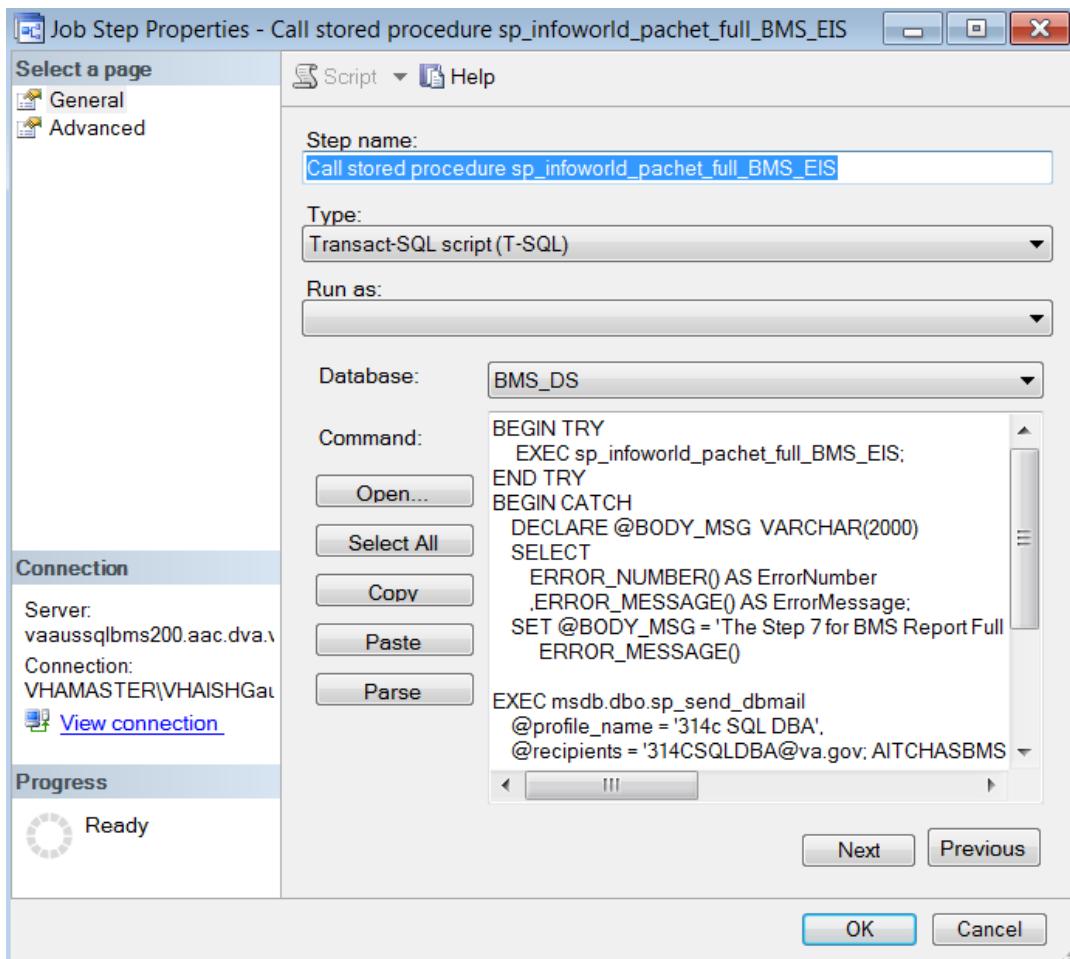


Figure 9- BMS-Job Step Properties-Call Stored Procedure\_SP\_Infoworld

**Step 8.** Call stored procedure sp\_infoworld\_pachet\_full\_BMS\_EVS

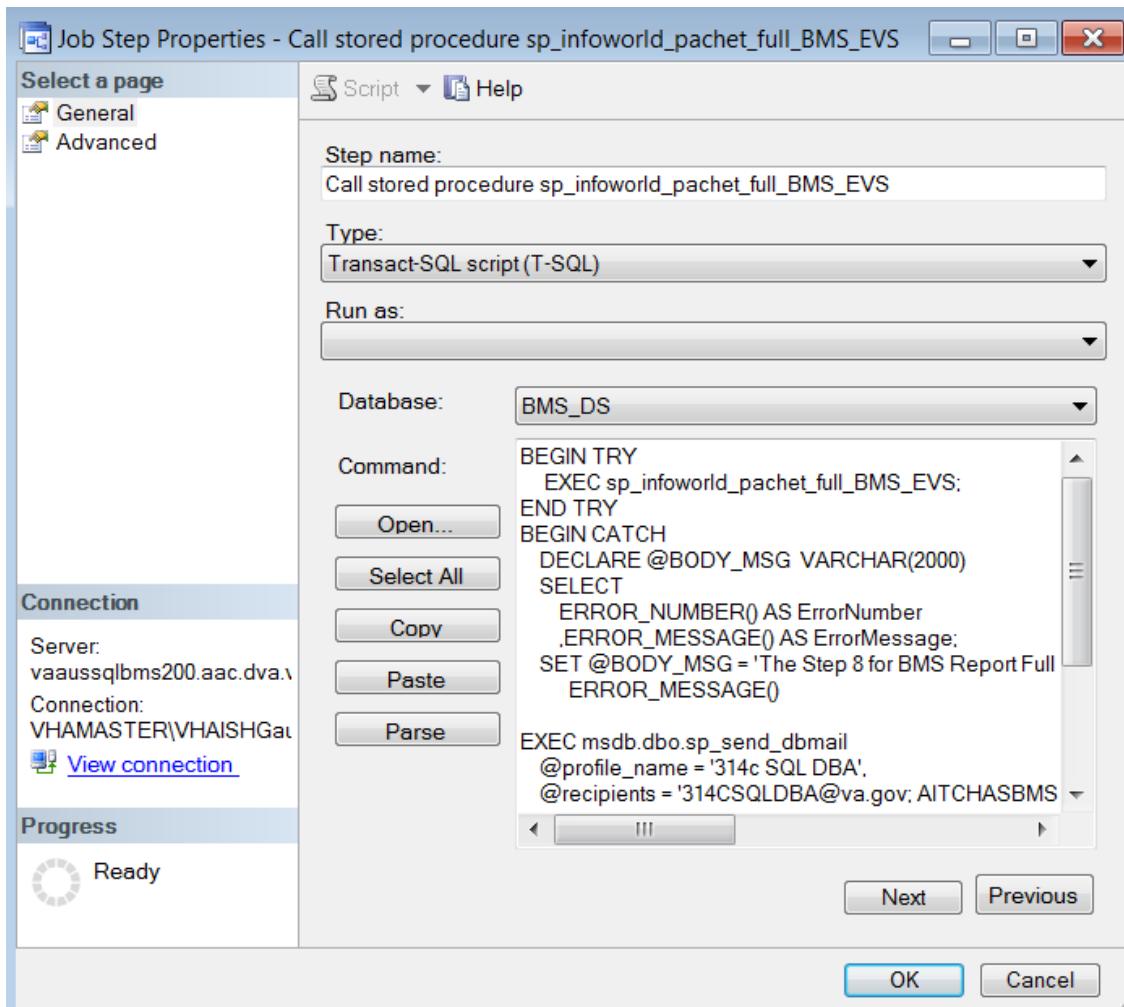

**Figure 10-BMS-Job Step Properties\_BMS EVS**

**Step 9.** Clear/Load DW Data, call usp\_ETL\_ProcessFull\_VOCAB

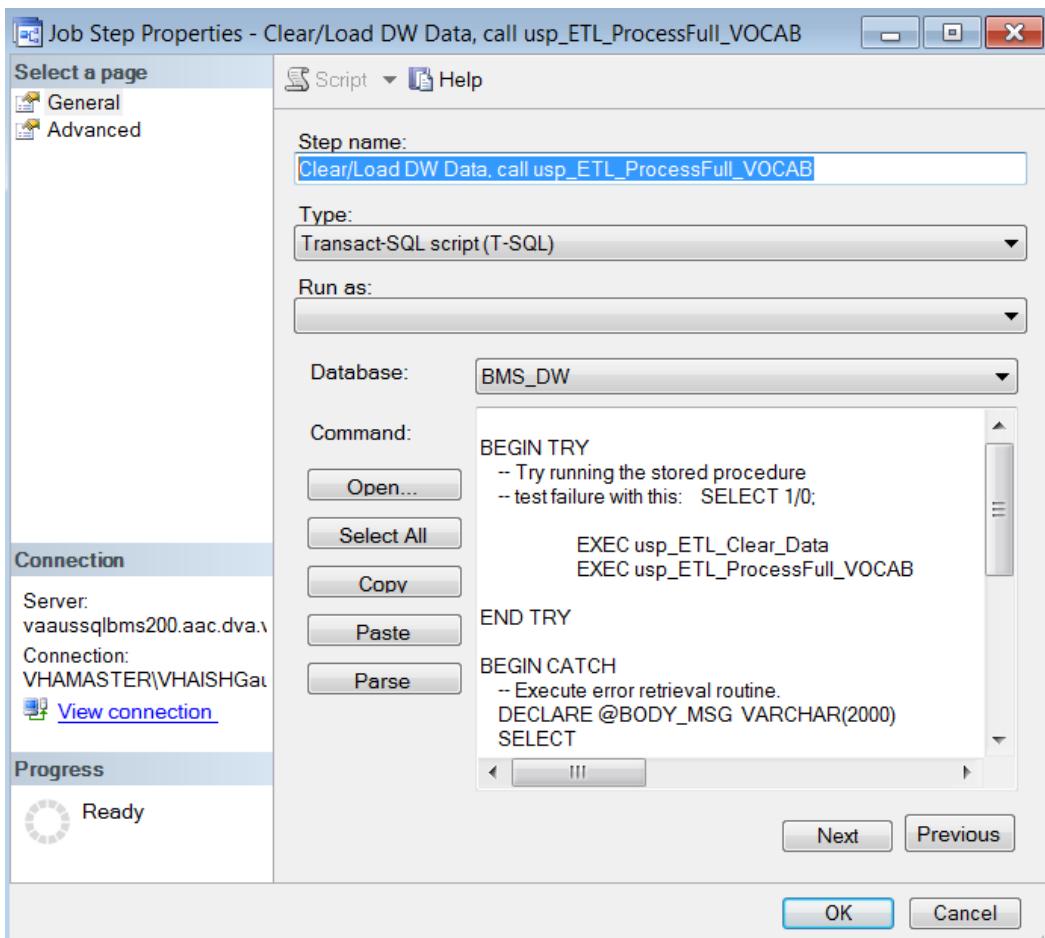


Figure 11-BMS- Job Step Procedures-VOCAB

**Step 10.** Call stored procedure usp\_ETL\_ProcessFull\_FACTS

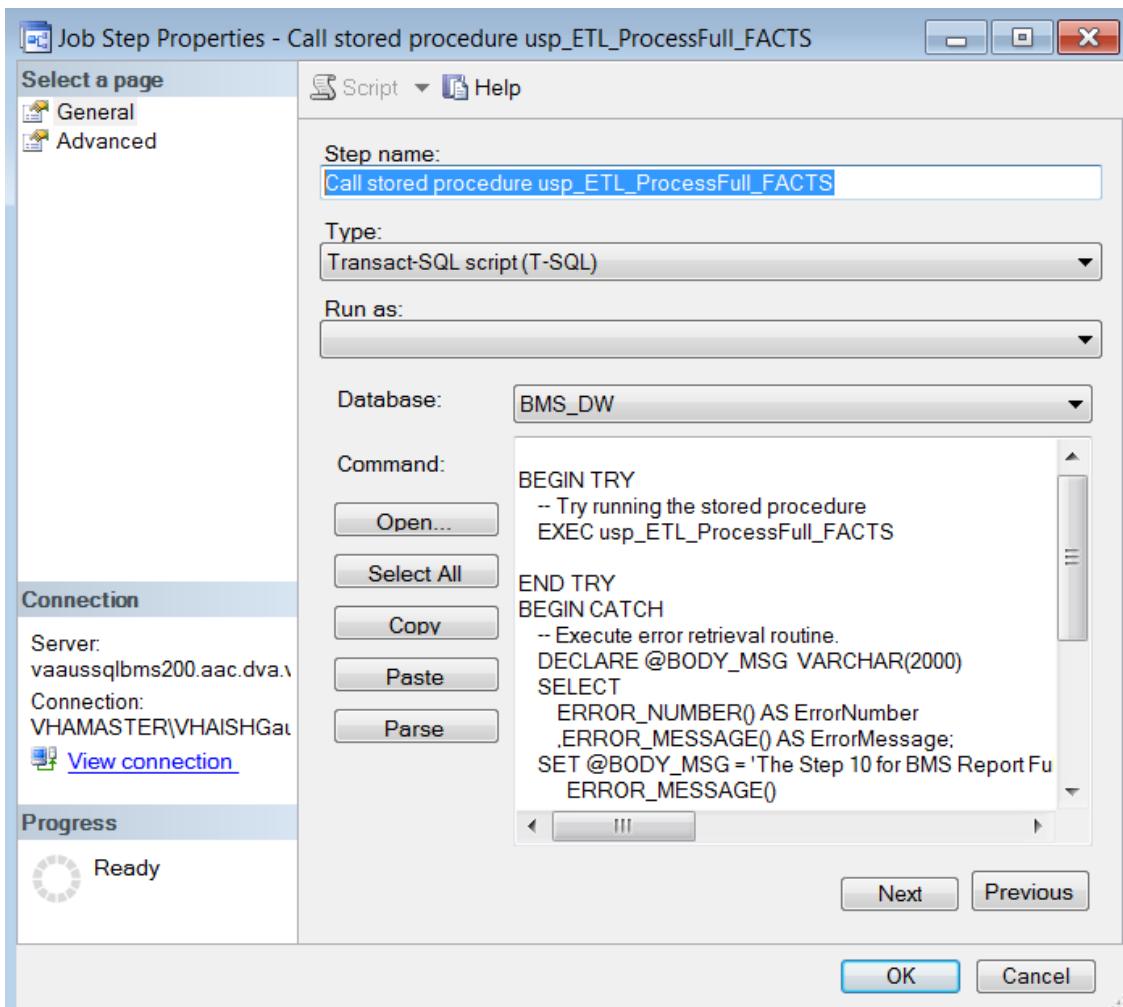


Figure 12-BMS-Job Step Procedures-ETL\_Processfull\_Facts

**Step 11.** Copy users in history database

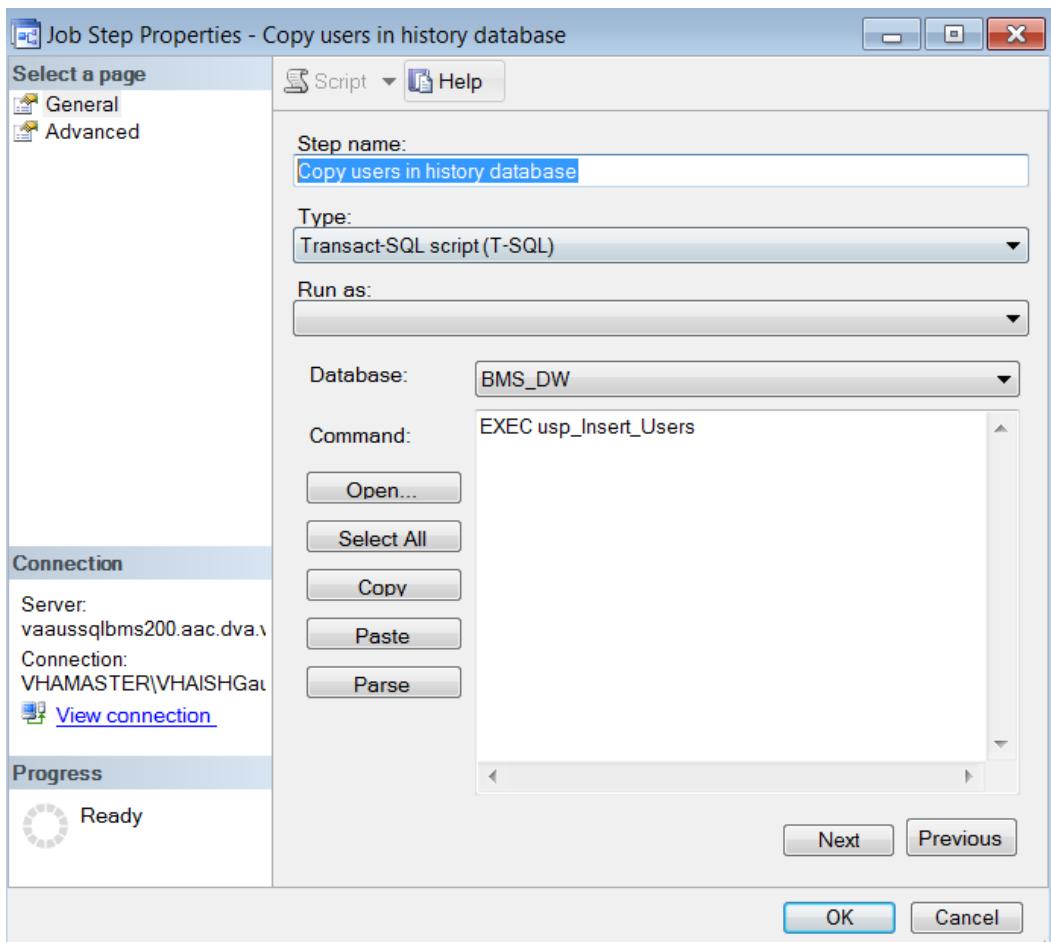


Figure 13- BMS- Copy User in history database

**Step 12.** Clear DS data

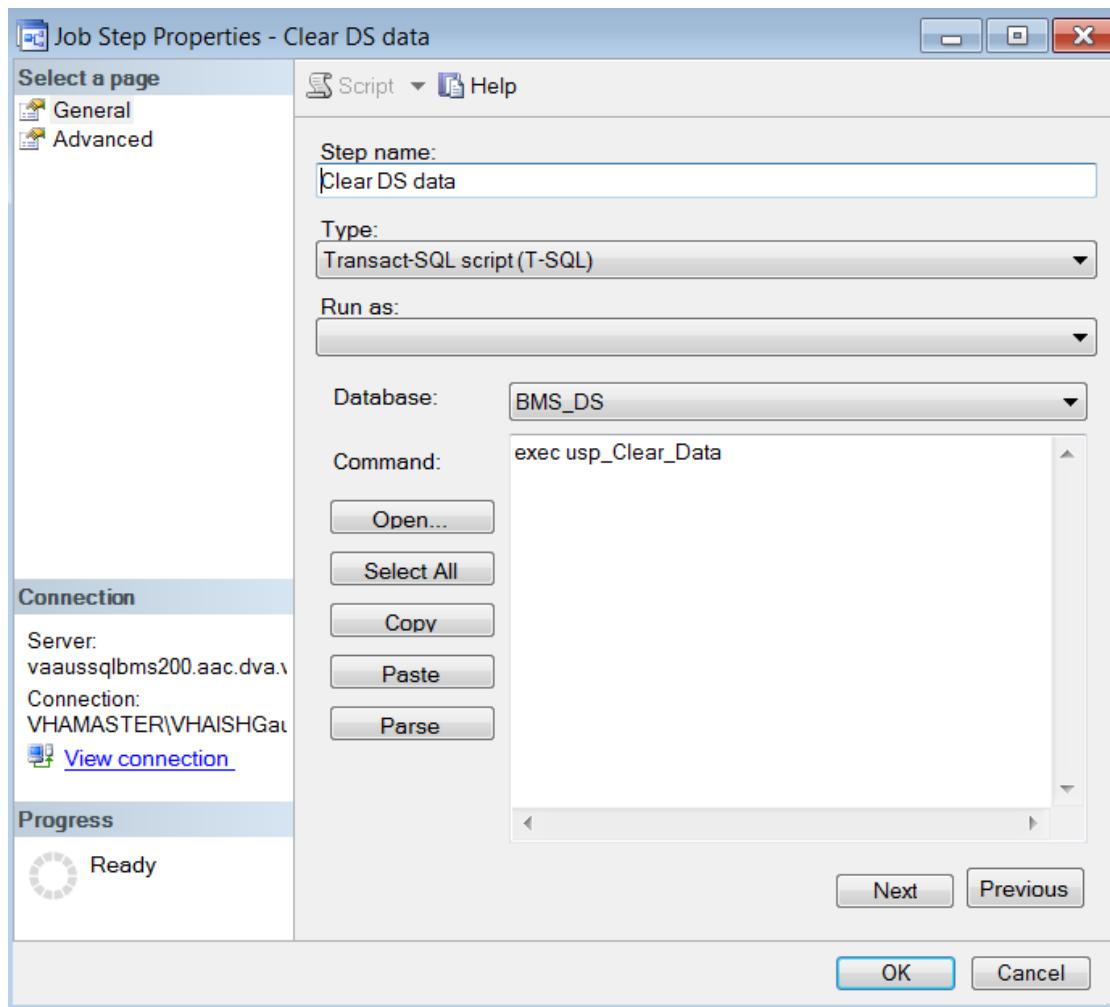


Figure 14- Clear DS data

**Step 13.** On Success Re-enable Incremental

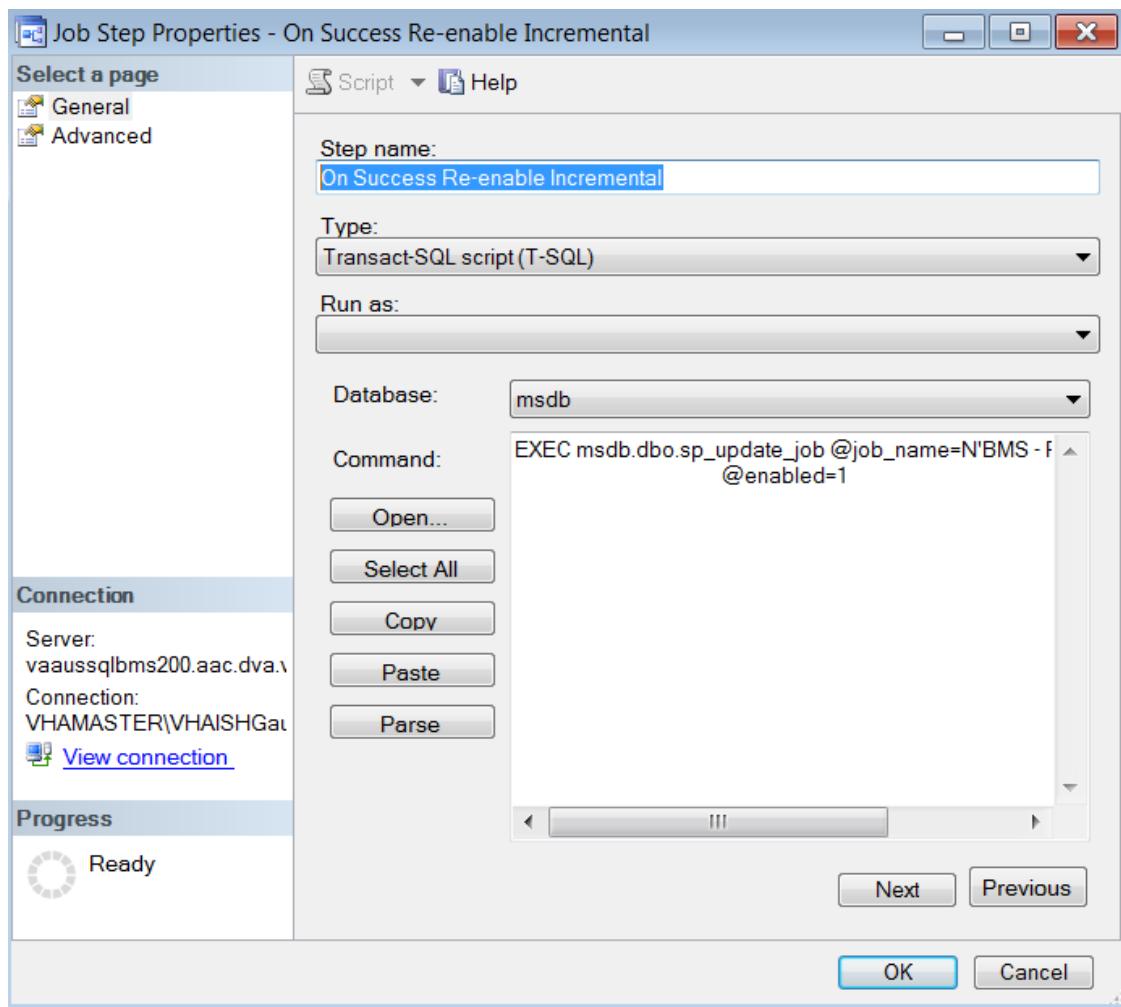


Figure 15-BMS-Re-enable Incremental

**Step 14.** On Fail Re-enable Incremental

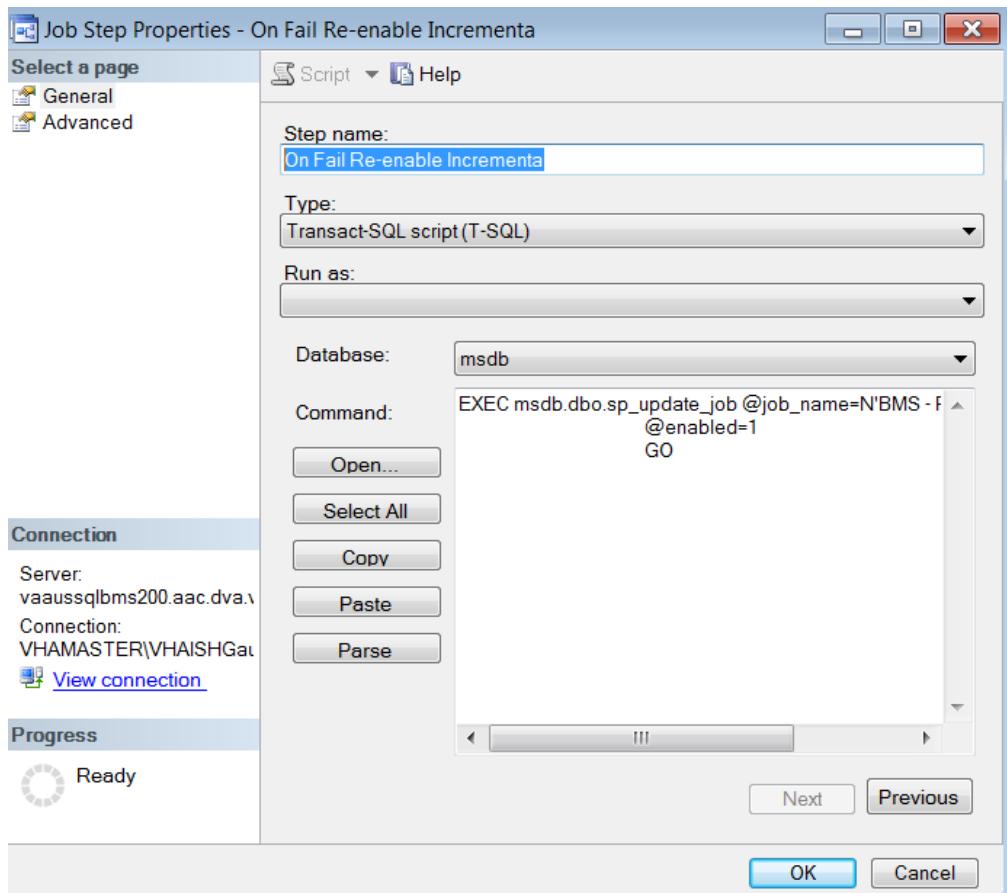


Figure 16-On Fail Re-enable Incremental

**Step 15.** Shrink BMS\_DS: Shrinks the file with the id 2 (the log file, to the size of 1 MB.


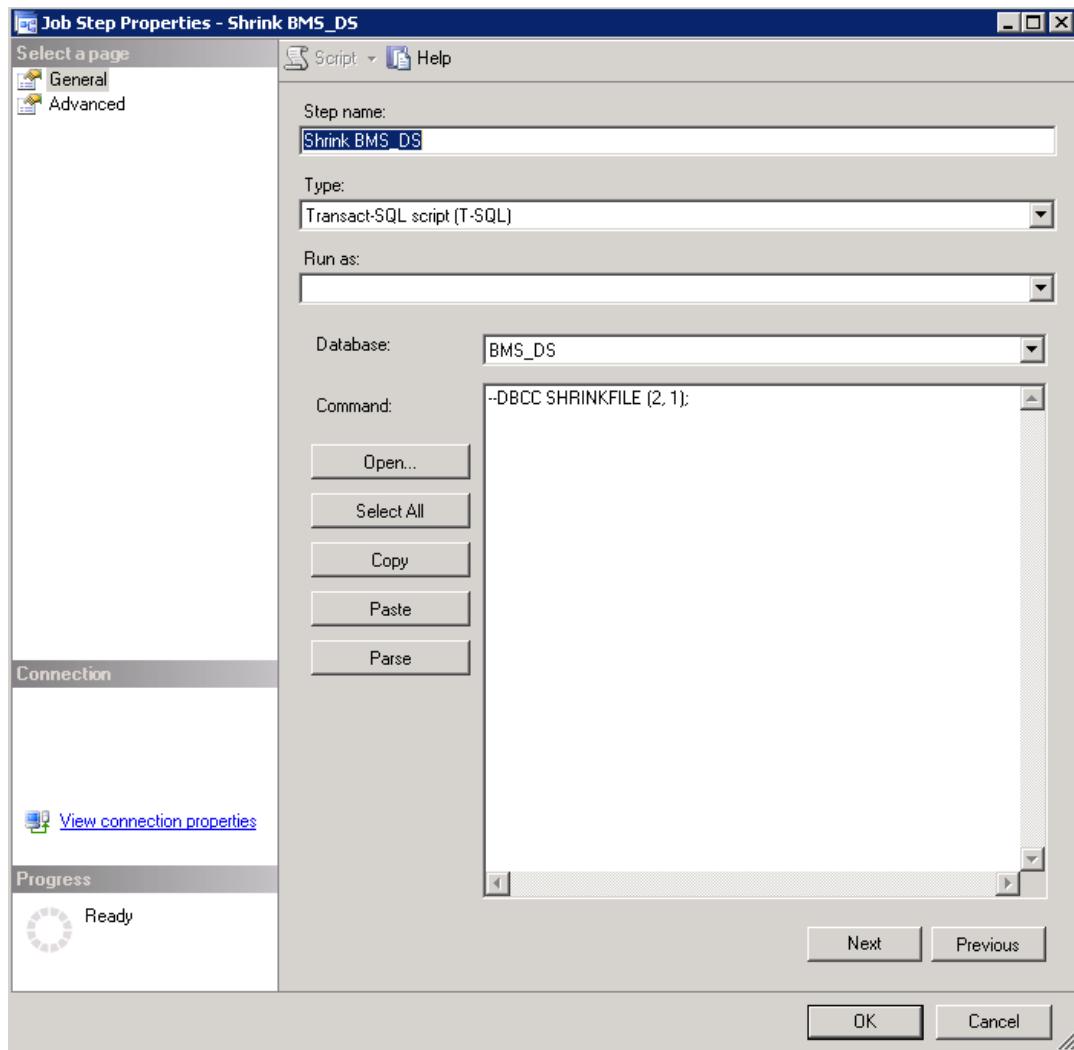



Figure 17-BMS-Shrink

**Step 16.** Clear data from BMS\_DW: the data warehouse database is cleared, meaning that its tables will become empty, but of course exceptions can exist and they really do - tables that contain static data and should not be removed. Thus, the database becomes ready to receive all the source data.

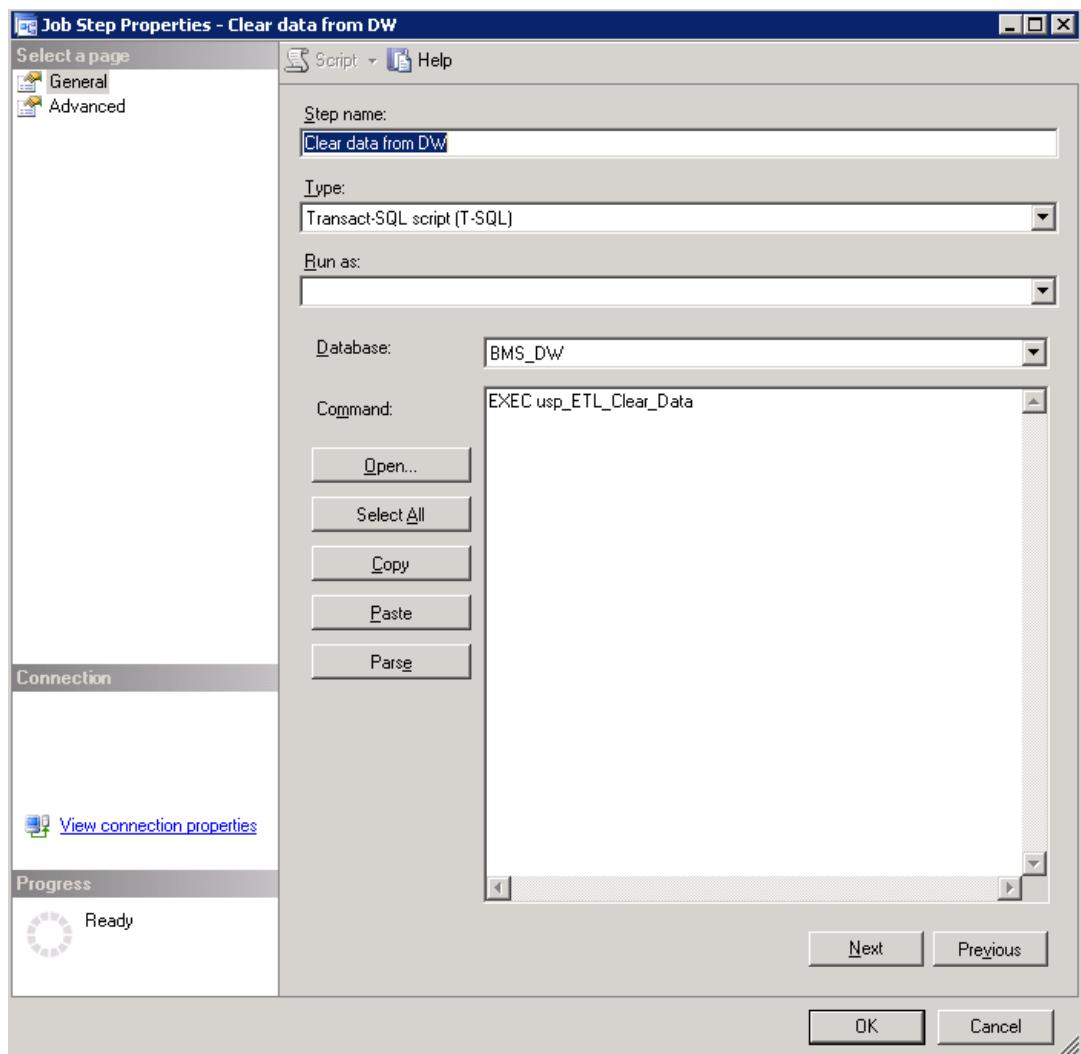


**Figure 18-BMS-Clear Data**

**Step 17.** Call procedure full on BMS\_DW: it inserts first the vocabulary data, then EIS entities (ETL dimension tables) and BMS acts (ETL facts tables).

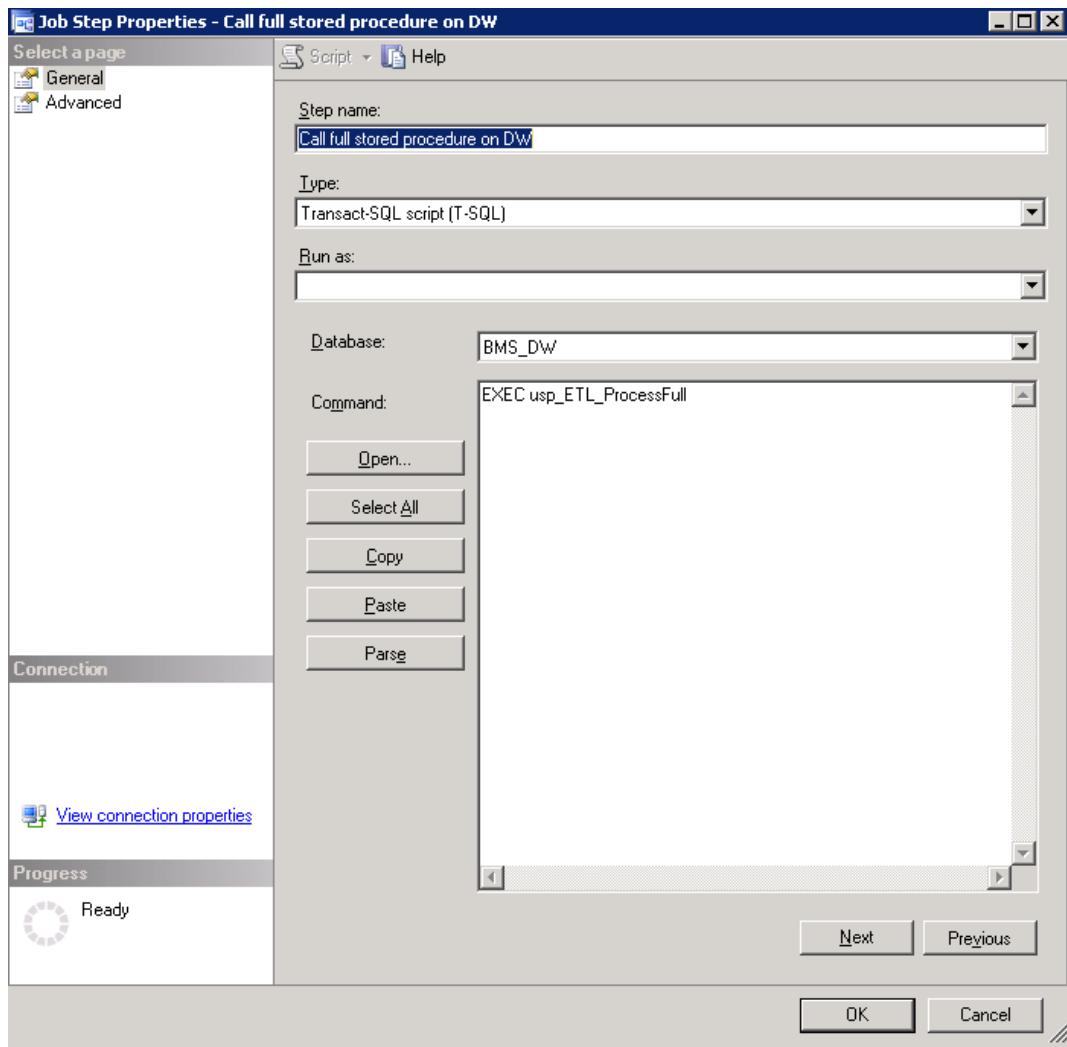


**Figure 19- BMS-Call Procedure Full**

**Step 18.** Copy users in history database: adds users in user in the table from BMS History database. This step is needed because some reports need to display users that did certain insert/update/delete operations in the application.

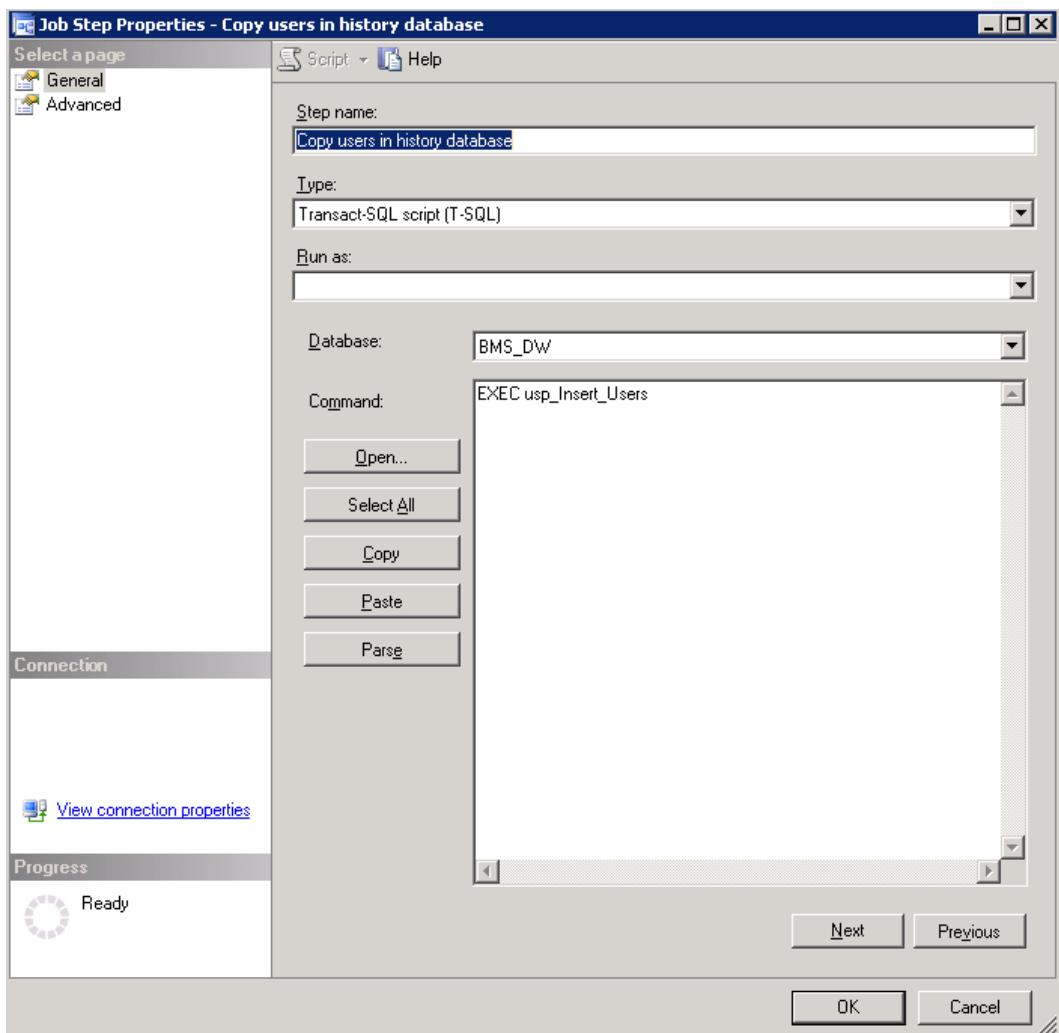

**Figure 20- Copy Users in History Database**

For each step a log file can be set, see screenshot below for step 7:

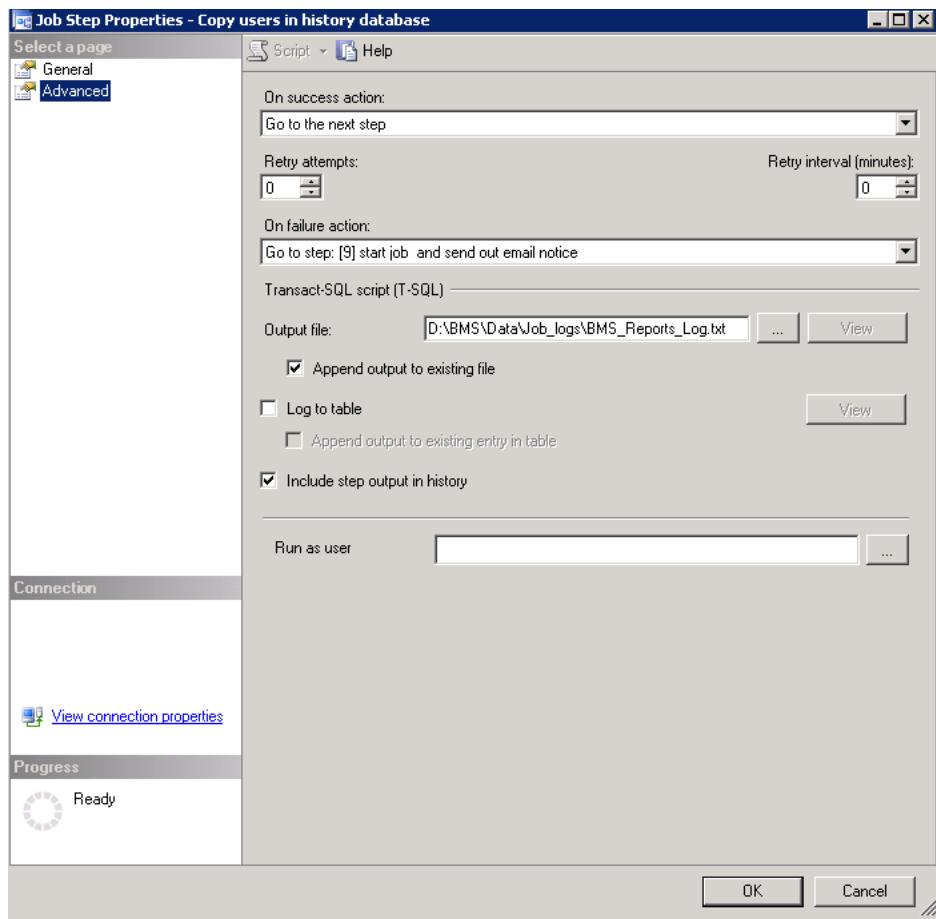

**Figure 21-BMS Reports Full Path File Log**

The job can be run by right clicking on the job and then choosing “Start job at step...”, selecting the first job in the appearing window and then hitting the Start button. Then a smaller window remains open, showing the progress of the execution and its result: success or failure. The detailed results can be found in the log file that you set at the installation phase. If an operation fails at any step, the job will quit. This setting can be changed in the step’s *Advanced* tab.

**Step 19.** Clear data from BMS DS database.

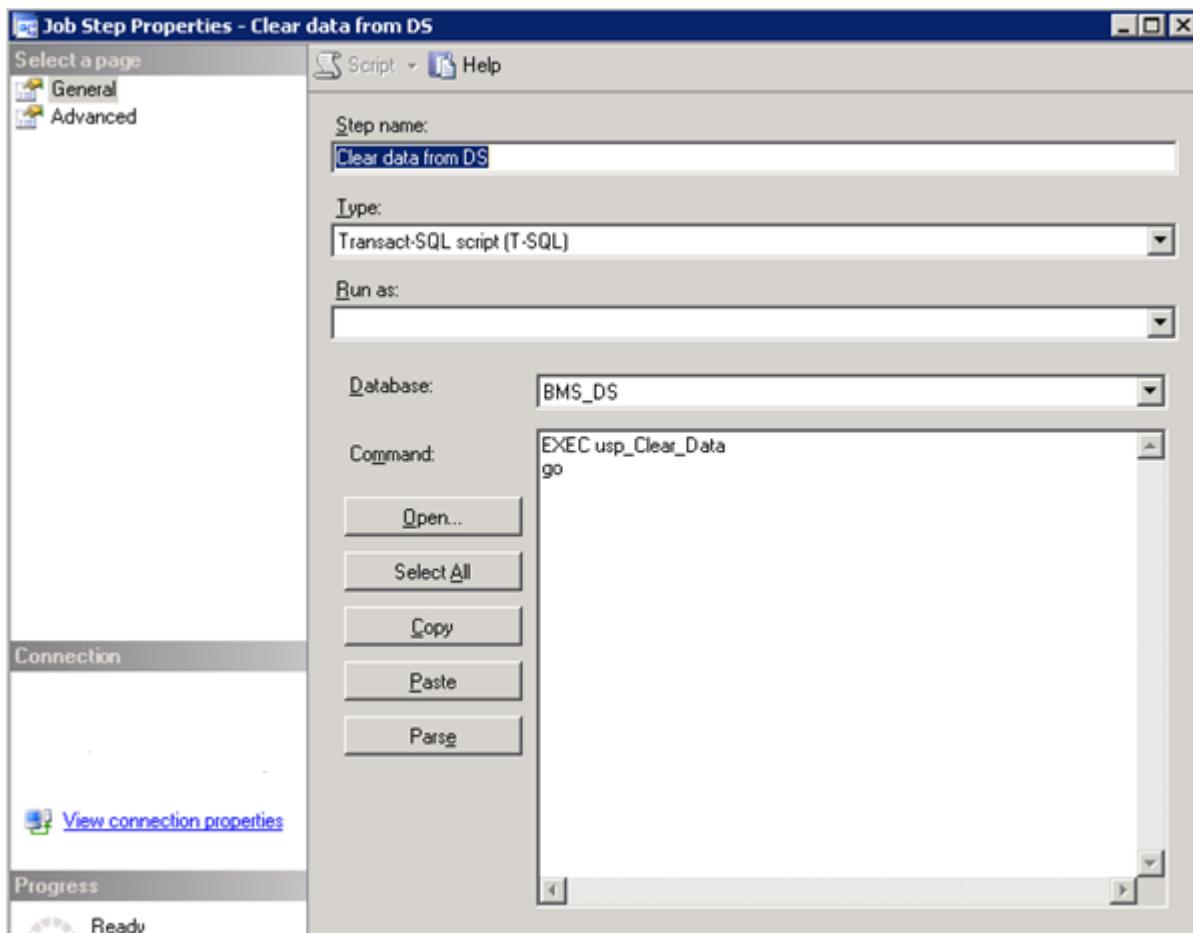


Figure 22- Clear Data from DS

**Step 20.** This step is only invoked if any of the prior steps of the BMS Report Full job fail. Once invoked, email notification of the failure is sent to the BMS Technical team and BMS Report Full job is restarted.

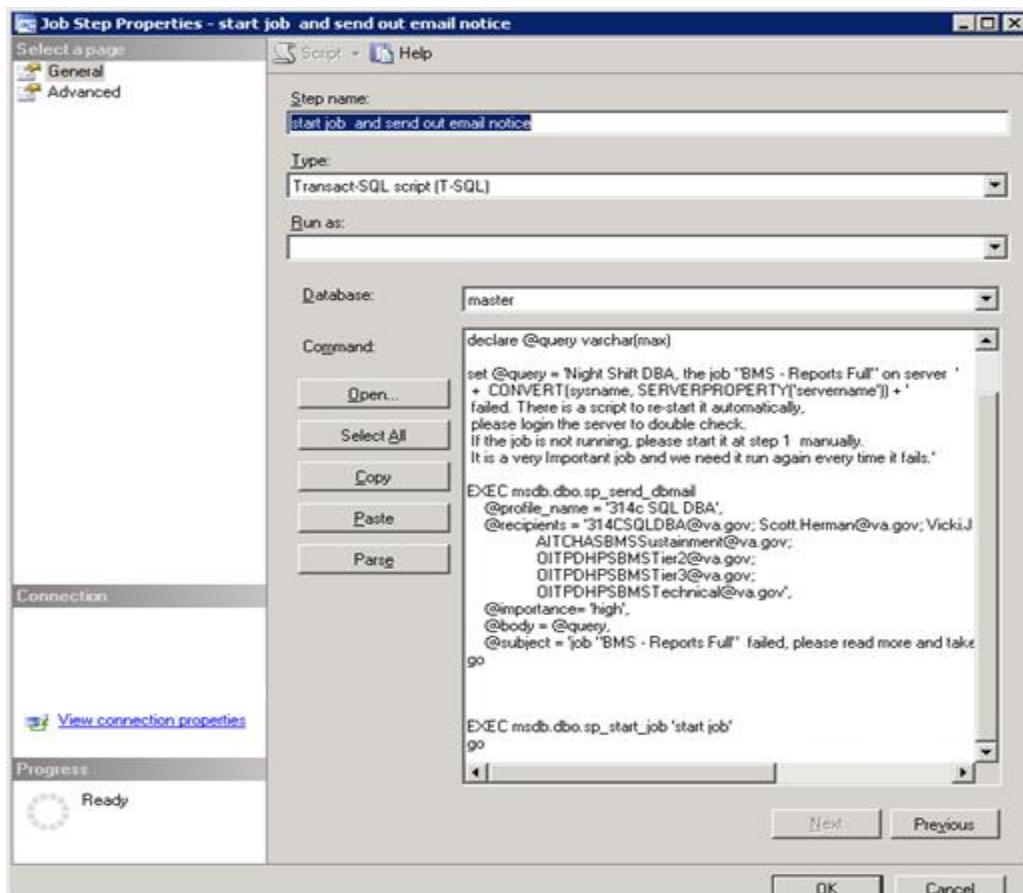


Figure 23-BMS Start Job and Send Email

## 2.4.2 BMS Incremental

BMS Incremental logic is to keep the BMS\_DW database up to date without having to delete all the existing data. The following picture shows the job's steps.


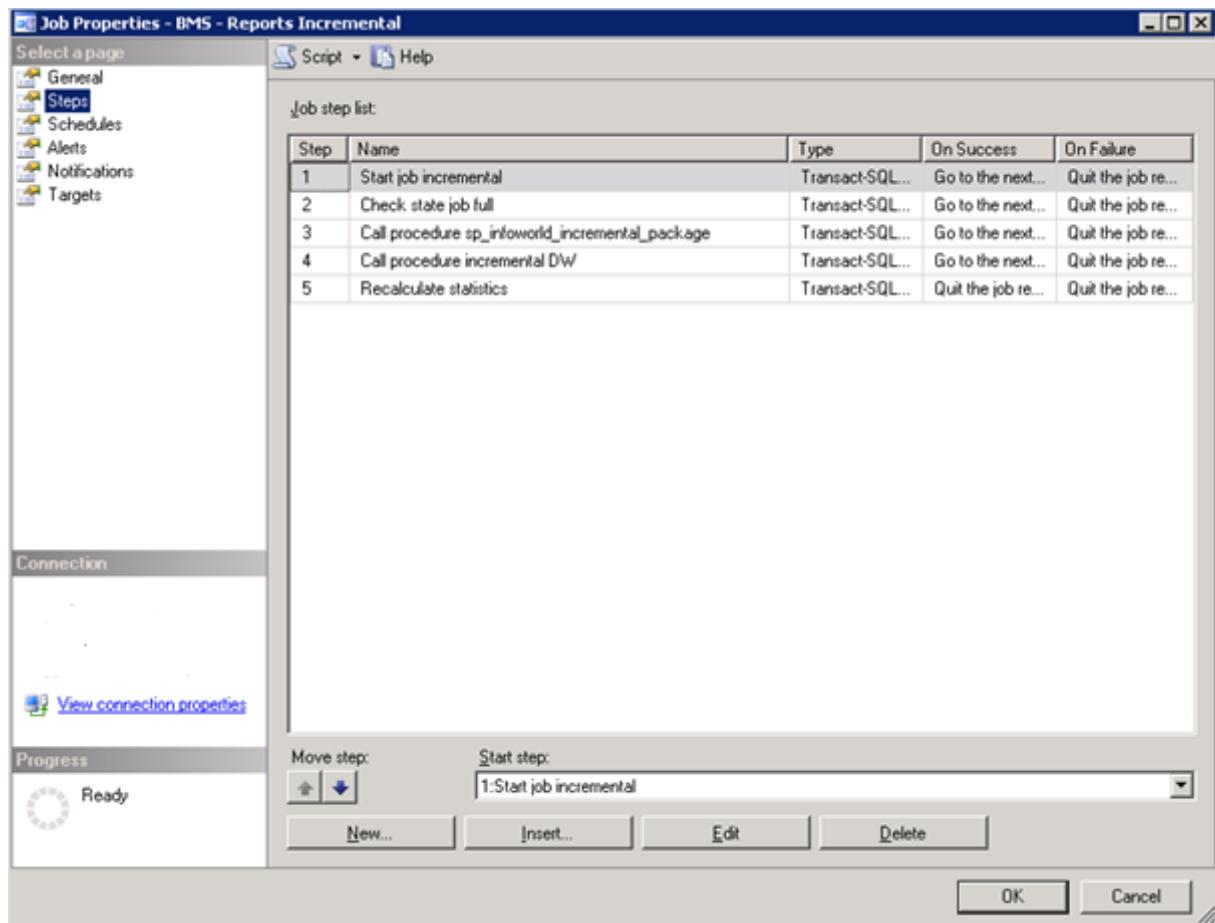


Figure 24- BMS- Report Incremental Job

**Step 1.** Start job incremental: this is only an informative step for the log file.

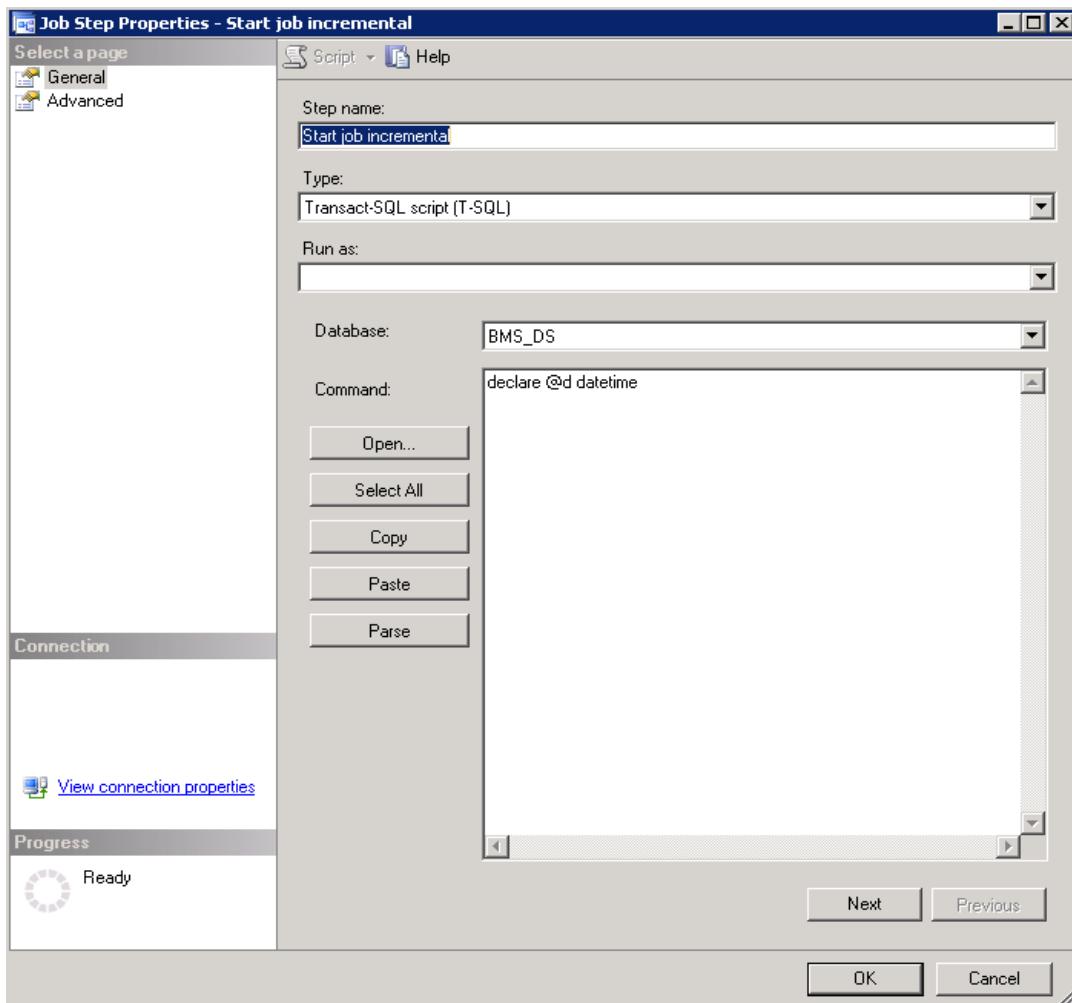

**Figure 25-BMS-STart Job Incremental**

**Step 2.** Check state job full: it checks the state of the BMS full job described above in order to be sure that it is not currently running, in which case the incremental job cannot continue.


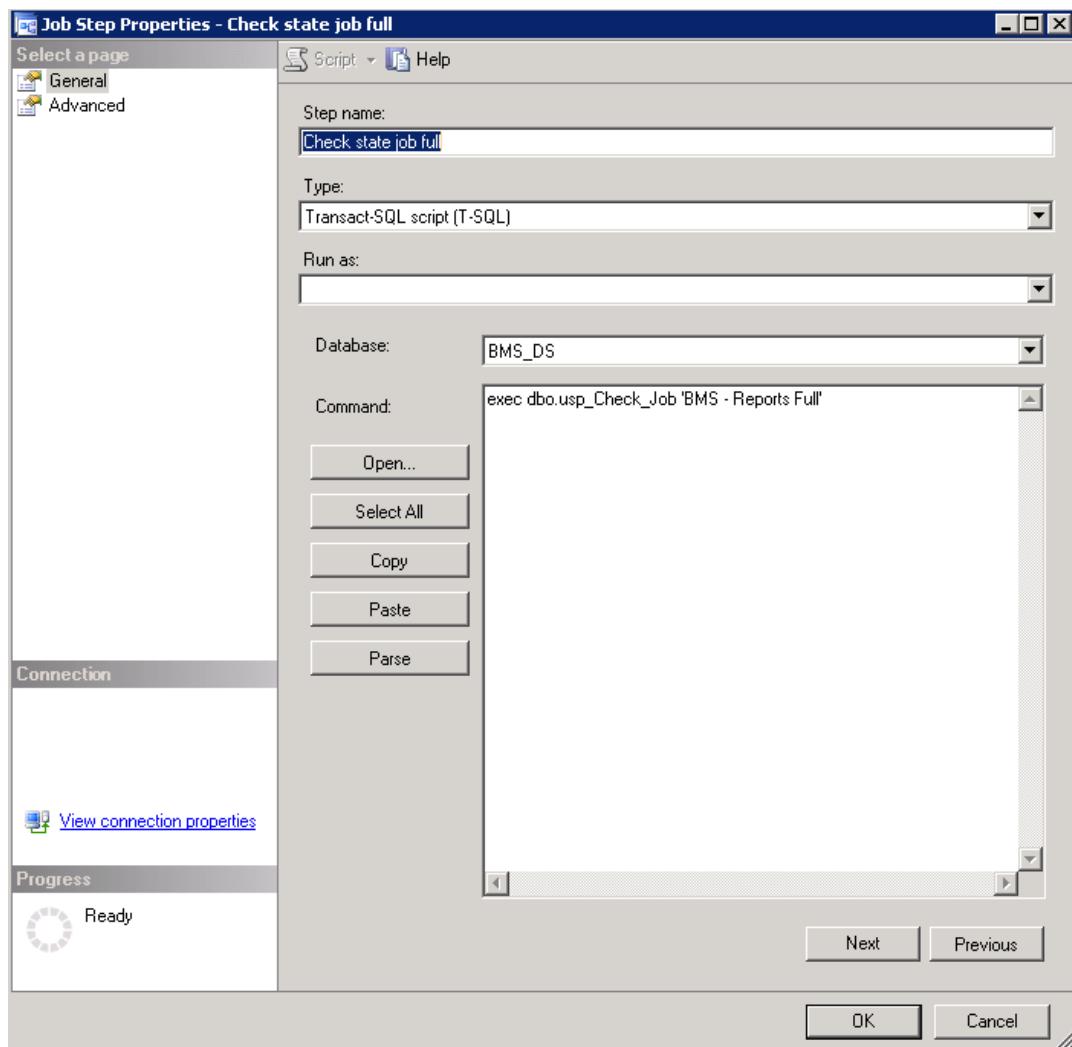



Figure 26-BMS-Check State Job Full

**Step 3.** Call procedure `sp_infoworld_incremental_package`: makes all the necessary updates from the source databases to the BMS\_DS database. When rows are deleted in the source tables, an update is made in BMS\_DS database (in the necessary tables) by changing a flag column's value to 1 (deleted) from 0 (existing).

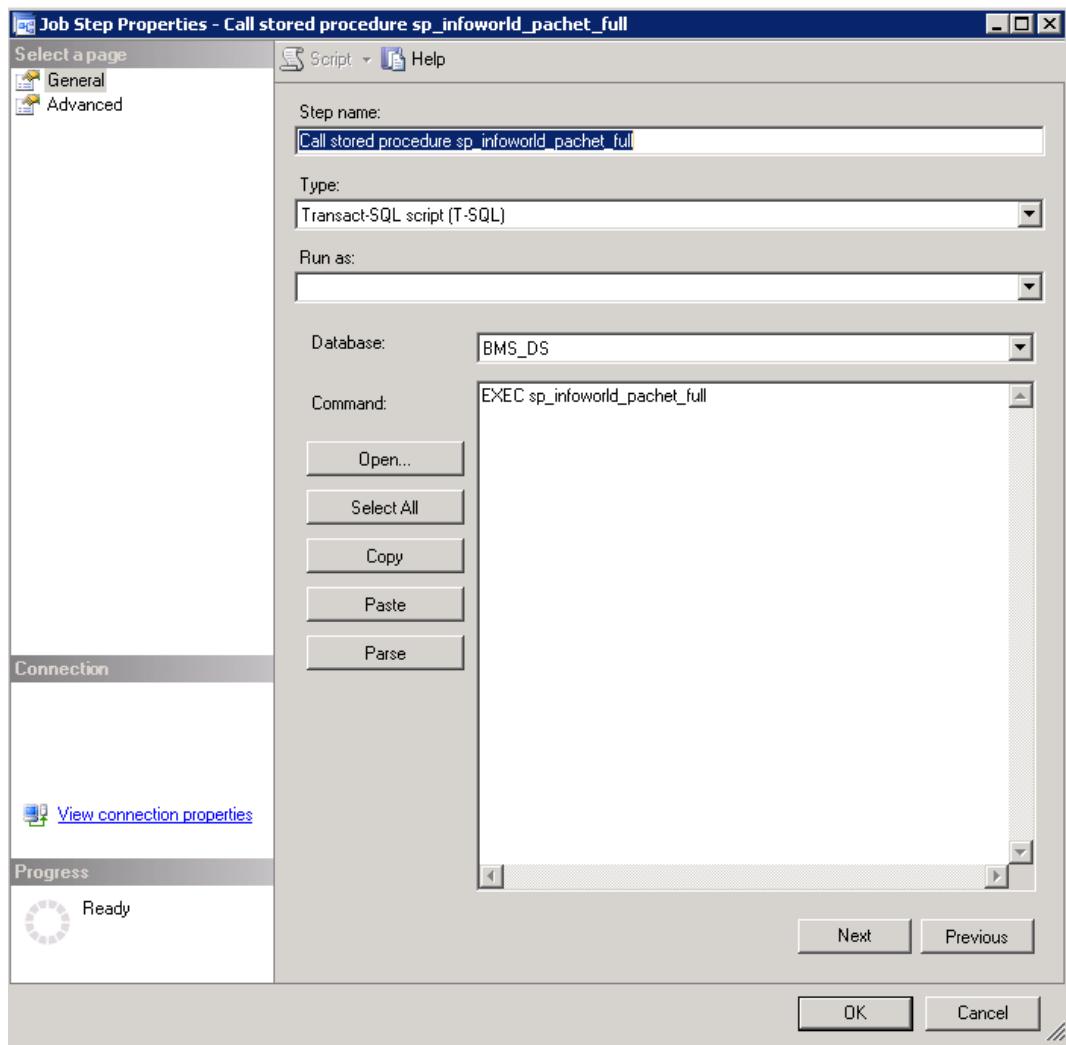

**Figure 27-BMS-Call Procedure Properties**

**Step 4.** Call procedure incremental DW: will search for any new, updated or deleted row in BMS\_DS database's tables in order to do the correspondent operations in its tables.

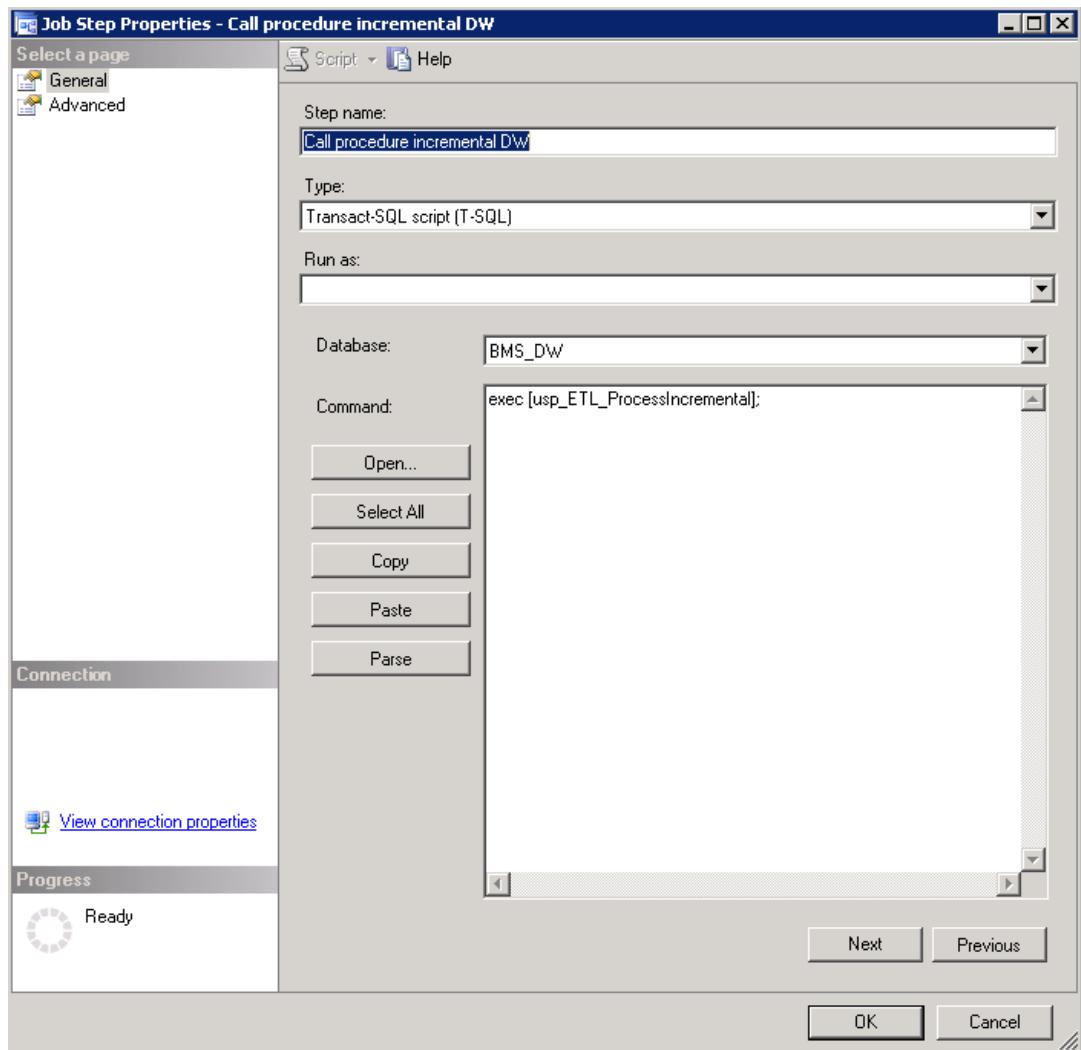

**Figure 28-BMS-Call Procedure Incremental**

For each step a log file can be set, see screenshot below for step 4:


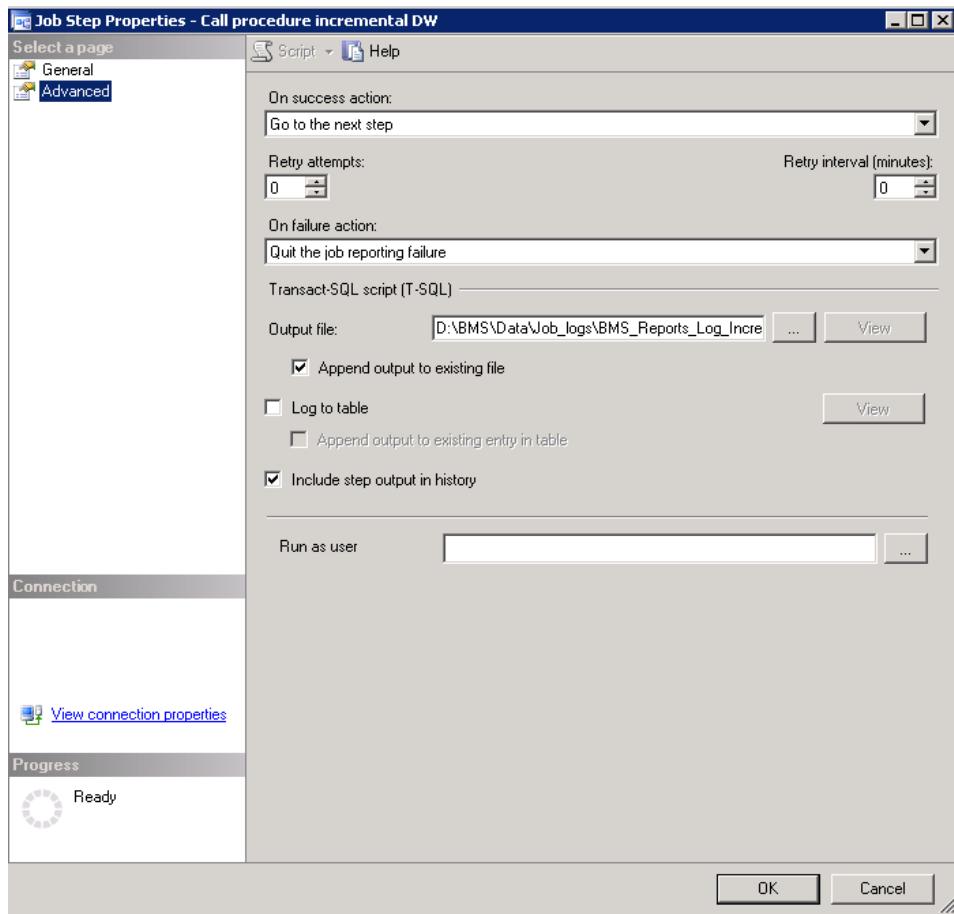


Figure 29- BMS Incremental Path File Log

**Step 5.** If the duration of the last completed incremental job exceeded 3 minutes, then recalculate statistics to improve query plan execution for the next job run.

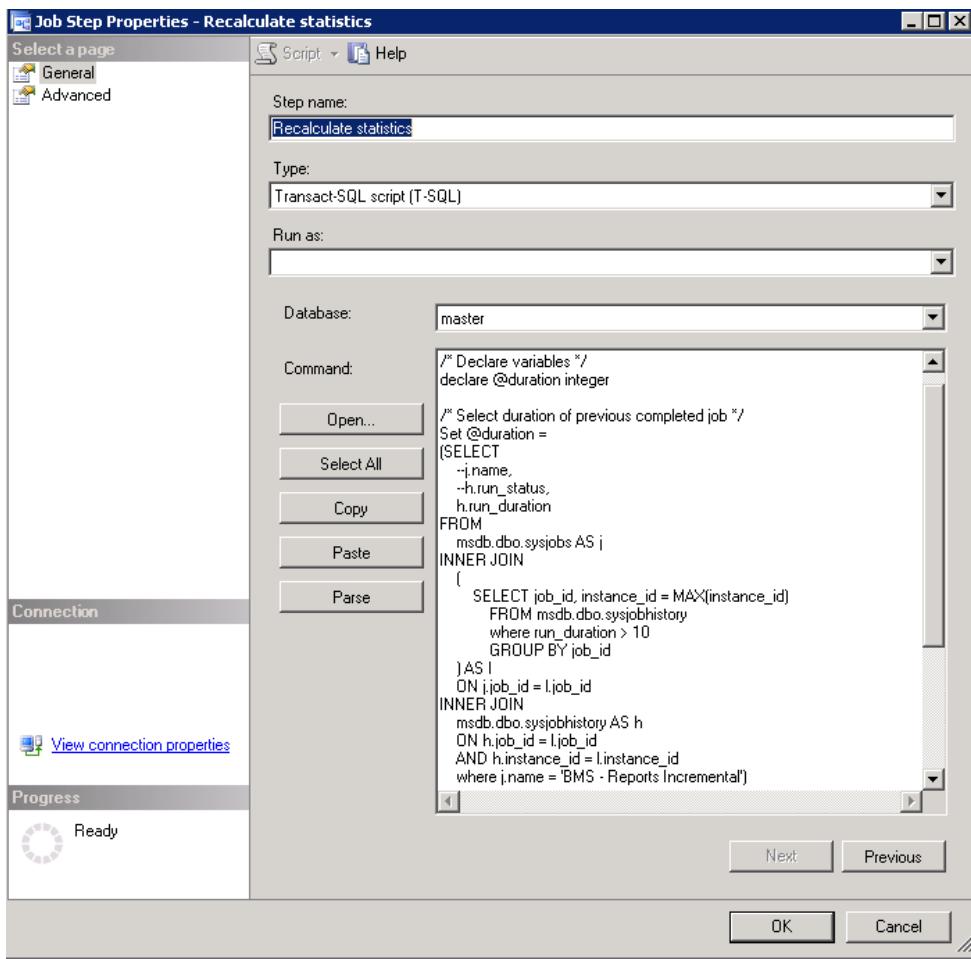

**Figure 30- BMS-Call Procedure Recalculate Statistics**

### 2.4.3 BMS Reports Windows Management Instrumentation (WMI)

This job runs a process through Windows Task Scheduler “BMS - Execute WMI\_UserGroup” that takes all the users and user groups from the Active Directory and inserts them in BMS\_DW database.

In order to run the process successfully, the user needs to configure WMI\_UserGroup.config file (Reference Table 12 - WMI User Group Configuration Parameters) and set the connection of the database in the Connections.xml file. These files are stored in the folder where WMI\_UserGroup application is installed.

The steps performed by this process include the following:

Below are the steps:

1. Deletes from the following tables from the BMS\_DW database:  
dbo.DOMAIN\_USER\_GROUP  
dbo.DIM\_DOMAIN\_USER  
dbo.DIM\_DOMAIN\_GROUP
2. Inserts the domain groups (all) into dbo.DIM\_DOMAIN\_GROUP table
3. Inserts the users (all) into the dbo.DIM\_DOMAIN\_USER table
4. Inserts the users group information into the dbo.DOMAIN\_USER\_GROUP table.

- a. Here it determines who belongs to what group and adds them, since a single user can belong to many groups
- 5. Writes the log messages
- 6. Closes the connections
- 7. Exits

Windows Task Scheduler calls a Batch script D:\BMS\Data\WMI\_UserGroup\WMI\_Wrapper.BAT The script sets up some variables for Log Files. The ‘Start’ time is recorded in a variable then calls the WMI\_UserGroup binary file. After the execution of the binary file the ‘End’ time is recorded. Calculations for the duration are done between the ‘Start’ and ‘End’ times, the metrics is sent to Introscope via a batch script which calls a Powershell script to send the Data. If the ‘Duration’ was less than 8 minutes, the base wrapper script is called again with an additional parameter of “2” added ( Second run ).

Introscope records the ‘Duration’ and ‘Exit’ Results of the binary executable. If the second run also fails to complete with a duration longer than 8 minutes, email alerts are sent via the Introscope rules engine.

## 2.5 Ward Whiteboard Kiosk Mode Display Configuration (BMS Whiteboard Kiosk Setup)

An electronic kiosk (or computer kiosk) houses a computer terminal designed to function while preventing users from accessing system functions. BMS has adopted the use of electronic kiosks to provide sites with the capability to setup Large Screen Displays for the BMS Ward Whiteboard for greater visibility. The Whiteboard Kiosk is read only access page that presents an overview of the beds in the current facility (or in the selected ward) and allows the user to assess at a glance the bed availability in their facility (or ward). Kiosk mode locks down the user interface to protect applications from accidental or deliberate misuse. These displays should be placed carefully, considering that confidential patient data (Social Security Number) should not be in view of people who are not authorized to see it.



Figure 31- BMS Ward Whiteboard Screen

Setting up for the BMS Whiteboard Kiosk involves a series of steps that most often are performed by IT staff with access to Local Site network configuration and/or staff with authority to request the required Local Site and Active Directory (AD) network configuration changes.

Steps for configuring the BMS Whiteboard Kiosk can be divided into three major categories:

- The Ward Whiteboard Kiosk URL
- The Network User for BMS Kiosk Access
- The Kiosk Workstation for Local Site Use

Each category involves a series of required steps to ensure successful operation of the Kiosk. Following is an outline of the process to setup and configure the BMS Whiteboard Kiosk for a local site.

- 1) *Create the Ward Whiteboard Kiosk URL. See details in [2.5.1 Create the Ward Whiteboard Kiosk URL](#)*
  - a) Determine the BMS Whiteboard Parameters for Kiosk Operation and Setup
  - b) Test the URL in a browser
  
- 2) *Set up a default user for the kiosk. See details in [2.5.2 Set up a default user for the BMS Kiosk](#)*
  - a) Set up the Network User for BMS Access
  - b) Configure the Whiteboard Kiosk Default Login User in BMS
  - c) Assign a Role to the Whiteboard Kiosk Default User in BMS
  
- 3) *Set up the Workstation / Kiosk Machine. See details in [2.5.3 Set up the Workstation / Kiosk Machine](#)*
  - a) Disable the Screen Saver
  - b) Configure the Power Settings to Disable Sleep and Stand by Mode
  - c) Configure Auto Log in Option and stop MS Lync from opening upon start up
  - d) Set the URL as the Home Page in IE
  - e) Add <https://vaww.bms.va.gov> to “Trusted Sites” in IE
  - f) Add to the start-up commands (Windows) the launch of the browser
  - g) Close IE, and restart to test
  - h) Set Registry Keys to configure Kiosk for local Site use

## 2.5.1 Create the Ward Whiteboard Kiosk URL

The Ward Whiteboard display uses parameters to determine the behavior of the display. For example, the whiteboard can display a specific ward or ALL wards for a site by setting the parameter **wardName**. Below is a description for each whiteboard display parameter along with available options for each.

Parameter	Short Description	Options
facilityCode	Code of facility (e.g., BROCKTON = BRK).	Enter the 3 character facility ID.
wardName	Name of BMS Ward Name. To see all the wards the value that needs to be configured is ALL.	These are the BMS WARDS as defined in the Facility, Site Options, Vista Ward Add/Edit. The Ward name value should match the "BMS WARD GROUP TEXT". A single ward can be entered or the value "ALL" to display all the wards at the facility.
splitScreen	To split the page in two tables enters the value "Yes".	Yes No
displayPTCode	How the patient should be displayed under the column "Patient" (full name or 1st+Last 4) or LastName. <b>LastName is required for Kiosk mode due to Privacy regulations.</b>	FirstAndLast4 <b>LastName</b>
genderColorCode	To change the background color for the row according with patient's gender.	Blue/Pink None
displayFooterCensus	To view the footer census.	Yes No
displayStaffAttending	What column is displayed in the table? (Staff column, Attending column or both).	Staff and Attending Staff Attending
scrollRate	The timer interval will affect the scrolling speed. This parameter can be absent. (If specified then it represents seconds).	Null or an integer value.

Table 15-Ward Whiteboard URL Configuration Parameters

### 2.5.1.1 Determine the parameters for the Kiosk, and create the URL

Sample URL to display All Wards for site BRK:

<https://vaww.bms.va.gov/WardWhiteboardUrl?facilityCode=BRK&wardName=ALL&splitScreen=No&displayPTCode=LastName&genderColorCode=Blue/Pink&displayFooterCensus=Yes&displayStaffAttending=Staff%20and%20Attending&scrollRate=20>

### 2.5.1.2 Test the URL

Once you have the URL, type it into a browser to test. The BMS Ward Whiteboard should come up. Note: a site can have a different URL for each kiosk.

## 2.5.2 Set up a default user for the BMS Kiosk

Create a network service account for accessing the BMS page. Make sure that it is in an Organizational Unit (OU) that will not get the Enterprise System Engineering (ESE) Federal Desktop Core Configuration (FDCC) / US Government Configuration Baseline (USGCB) User Settings. Set the “Log on to” so the account can only log onto the kiosk PC you are setting up.

### 2.5.2.1 Set up the Network User for BMS Access

- Create AD User with non-expiring password under Service Accounts for the local site. If you are not an AD administrator then provide the following instruction to the AD along with your request for a new service account.

In Active Directory Create a Generic User with a Non-Expiring password in Service Accounts for your location with Access to All Computers.

**NOTE: You will create a single ID, not one for every PC. Also, do not setup auto login with this generic account at this point as PCs will automatically lock at this level.**

- Right click the “Service Accounts” folder (vXX.med.va.gov/VISNxx/Facility(XXX)/Service Accounts) and select New...User.  
**NOTE: Do not use the “Service Accounts” folder directly under vXX.med.va.gov.** Under First Name, enter vhaXXX\_\_\_\_\_ (such as vhaSTLBMSUser)
- Enter the same under “User Login Name”
- Enter a password when prompted and select
- Uncheck “User must change password at next logon”
- Check “Password never expires”
- Click “OK” at the warning that the user will not be prompted to change the password.
- Click “Next”
- At the top of the screen the path should read, “vXX.med.va.gov/VISNxx/Facility(XXX)/Service Accounts”
- Uncheck “Create an Exchange Mailbox”
- Click “Next”
- Review confirmation screen for accuracy and click “Finish”.
- Your new account should be available in your “Service Accounts” list. You may have to refresh your list to see it.
- Double-click your new account, in the description field, add
- SERVICE ACCOUNT: VHxxxxxxxx(YourUserName): BMS DISPLAY
- In the Account tab, ensure “This user can log on to “All computers”. Do not identify any specific computers.
- When you are finished, your new account in the Service Accounts list should only show a Name, Type, and Description. All other fields should be blank.

### 2.5.2.2 Configure the Whiteboard Kiosk Default Login User in BMS

For the current facility that will display the associated Whiteboard page, a default user needs to be configured in BMS application for the Ward Whiteboard Kiosk.

To configure the Whiteboard Kiosk Default User:

- ***Go to the BMS Site Home Page***

- **Click on the Site Options link**
- **Click on the Facility Setting link**
- **Fill the fields “Whiteboard Kiosk Default User Name:”, “Whiteboard Kiosk Password:” and “Whiteboard Kiosk Password Confirm:” with the BMS Service Account ID**

Facility Configuration - VA NORTH TEXAS HEALTH CARE SYSTEM: DALLAS VA MEDICAL CENTER (NTX)	
PARAMETER	OPTIONS
BMS Server Time Zone	CENTRAL STANDARD TIME
Facility Site Time Zone	CST
Auto-Removal Patients Pending Bed Placement List?	Yes
Integrated Facility?	No
Facility Name:	VA NORTH TEXAS HEALTH CARE SYSTEM: DALLAS VA
Facility Address 1:	4500 S. LANCASTER RD.
Facility Address 2:	DALLAS, TEXAS 75216
Facility Point-of-Contact:	JEFFREY D ALLEN
Facility POC Email:	JEFFREY.D.ALLEN@VA.GOV
Facility POC Telephone:	214 857 4607
Local Time Adjust:	0
EMS Default User Name:	vhantxbedmgmt
EMS Password:	
EMS Password Confirm:	
Whiteboard Kiosk Default User Name: Whiteboard Kiosk Password: Whiteboard Kiosk Password Confirm:	vhantxbedmgmt vhantxbedmgmt vhantxbedmgmt
<input type="button" value="Submit"/> <input type="button" value="Cancel"/>	

**Figure 32-Facility Settings**

- **Click Submit**

### 2.5.2.3 Assign a Role to the Whiteboard Kiosk Default User in BMS

Each facility must assign the BMS “EMS USER” Role to the Service Account ID created to run the Whiteboard Kiosk URL. This assignment can be done from the **BMS Admin Section → Add/Edit BMS User** hyperlink or Facility **Site Options → BMS User Add/Edit** hyperlink.

- **Click the Select Existing NT User Name button**
- **Select the correct VISN Domain from the left Drop Down Box.**
- **In the User Name box Enter the BMS Service Account ID created for the BMS EMS/Whiteboard Kiosk. Then click the Find button**
- **Click the Selected Radio button for the user. Then click the Select button.**
- **In the EMS User box, select “Yes”. All other roles should be “No”.**
- **In the Default Region box, select the correct Region.**
- **In the Default VISN box, select the correct VISN.**
- **In the Default Site box, select your Site.**
- **In the READ Access box, select “Yes”.**
- **In the WRITE Access box, select “Yes”.**

Admin Menu      ADMINISTRATION SECTION - USERADD/EDIT      Logout

PARAMETER		OPTIONS	
NT User Name	v17.med.va.gov\vhantxbedmgmt		
Support User?	No	<input type="button" value="Select Default"/>	
National User?	No	<input type="button" value="Select Default"/>	
Regional User?	No	<input type="button" value="Select Default"/>	
VISN User?	No	<input type="button" value="Select Default"/>	
Admin User?	No	<input type="button" value="Select Default"/>	
Audit Log User?	No	<input type="button" value="Select Default"/>	
Site User?	No	<input type="button" value="Select Default"/>	
EMS User?	Yes	<input type="button" value="Select Default"/>	
EMS Supervisor User?	No	<input type="button" value="Select Default"/>	
Guest User?	No	<input type="button" value="Select Default"/>	
Default Region:	2	<input type="button" value="Select Default"/>	
Default VISN:	17	<input type="button" value="Select Default"/>	
Default Site:	NTX - VA NORTH TEXAS HEALTH CARE SYSTEM: <input type="button" value="Select Default"/>		
READ Access?	Yes	<input type="button" value="Select Default"/>	
WRITE Access?	Yes	<input type="button" value="Select Default"/>	

Display only the facilities with permissions

READ Access	WRITE Access	Region	VISN	Facility
<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	Region 2	VISN 17	DALLAS (549, NTX)

**Figure 33- Whiteboard Kiosk User Role Assignment**

- Click Submit

### 2.5.3 Set up the Workstation / Kiosk Machine

After setting up the workstation / Kiosk machine, it will automatically log in to Windows, and automatically login to BMS.


#### 2.5.3.1 Disable Screen Saver

In order to display the Whiteboard page continuously the screen saver needs to be disabled.

NOTE: The Windows menu that allows the disable of the screen saver might be different from one version of Windows to another. For example, for Windows 7 the needed operations are:

- Right click on the desktop
- Click Personalize

- Click on the screensaver button on the lower-right part of the page

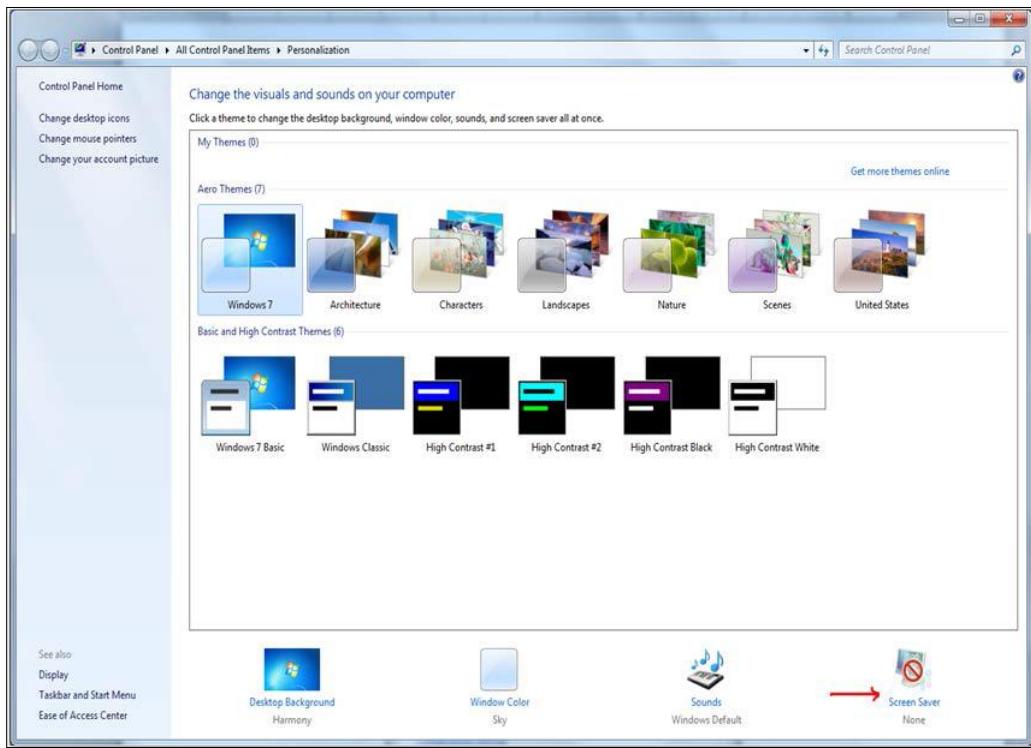

**Figure 34- Screen Saver Option**

- Select None from the screensaver drop down on the displayed form

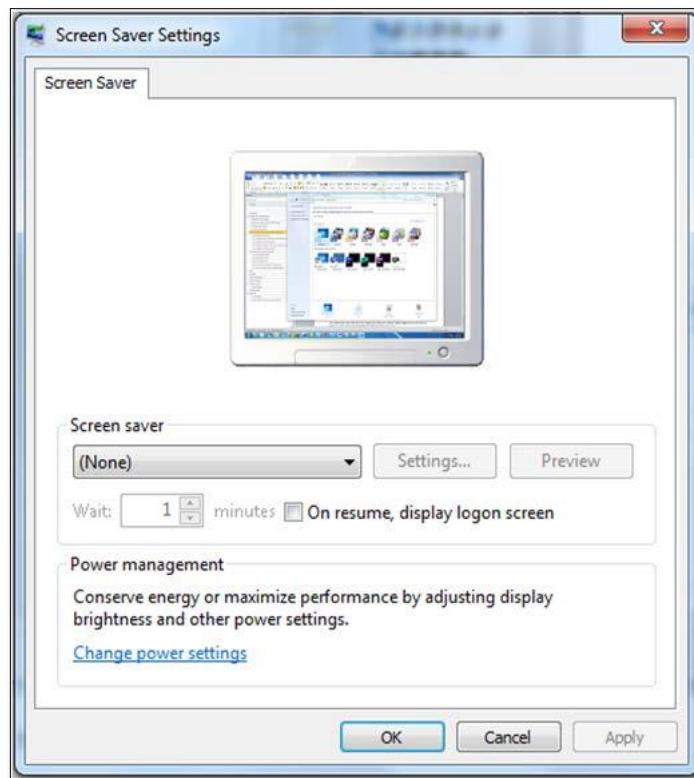


Figure 35- Screen Saver Settings Window


- *Click OK.*

### 2.5.3.2 Configure Power Settings: Disable Sleep and Stand-by Mode

In order to display the Whiteboard page continuously the power settings need to be adjusted so that the computer will never enter into hibernate or stand-by and also the screen will never turn off.


**NOTE:** The Windows menu that allows the configuration of the power settings might be different from one version of Windows to another. For example, for Windows 7 the needed operations are:

- *Go To Control Panel*
- *Select Power Options*

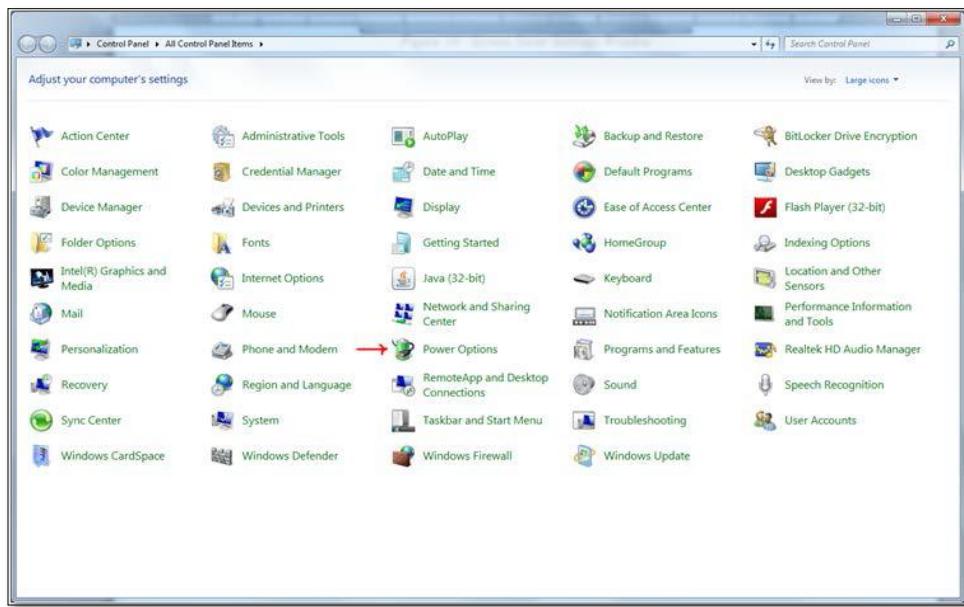

**Figure 36- Power Options**

- Click on “Change Plan settings” for the active plan

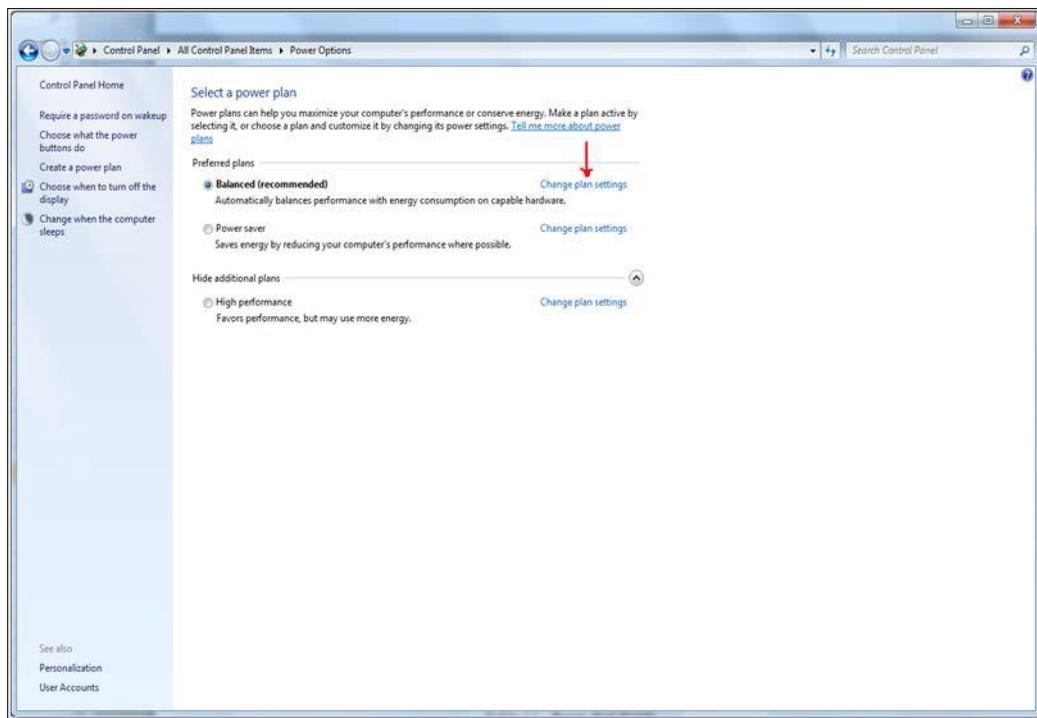

**Figure 37- Change Plan Settings Option**

- Select “Never” from the drop downs associated with “Turn off the display” and “Put the computer to sleep”

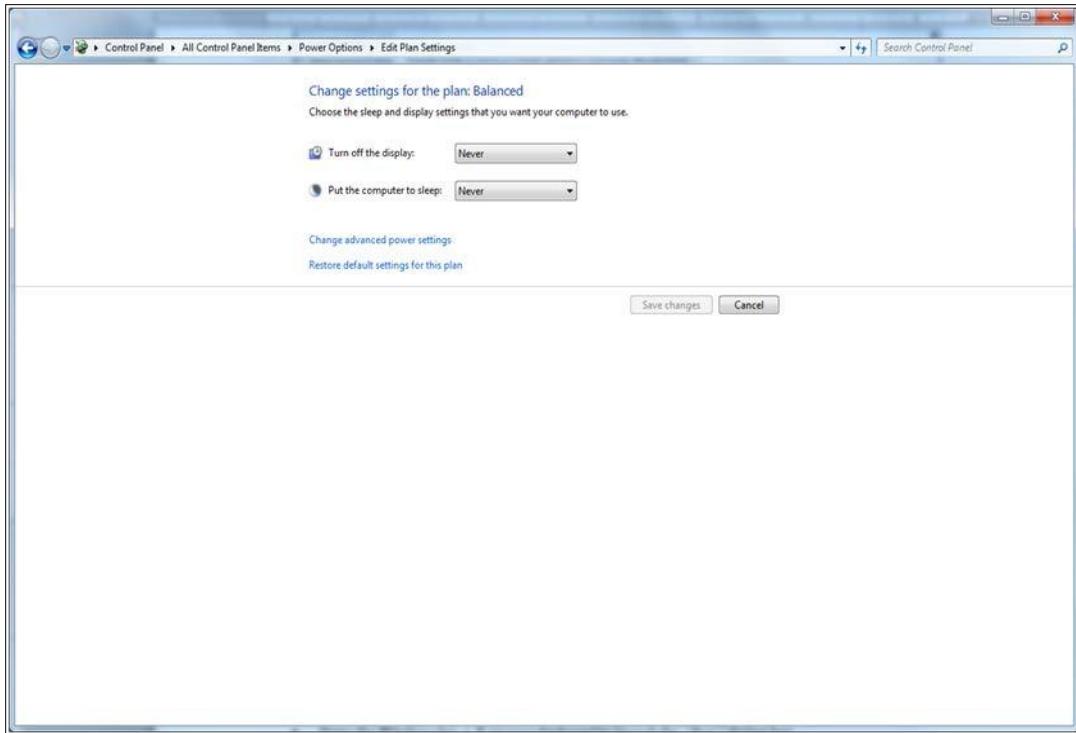


Figure 38- Power Options Settings

- Click “Save changes”

### 2.5.3.3 Configure Auto-login Option and stop Microsoft Lync from opening upon start up

**Configure Auto-Login:** The computer that will display the Whiteboard page needs to have the auto-login configuration set to “true”.

**NOTE:** The Windows menu that allows the configuration of the auto-login settings might be different from one version of Windows to another. For example, for Windows 7 the needed operations are:

- Press the Windows key + R on your keyboard to launch the “Run” dialog box.

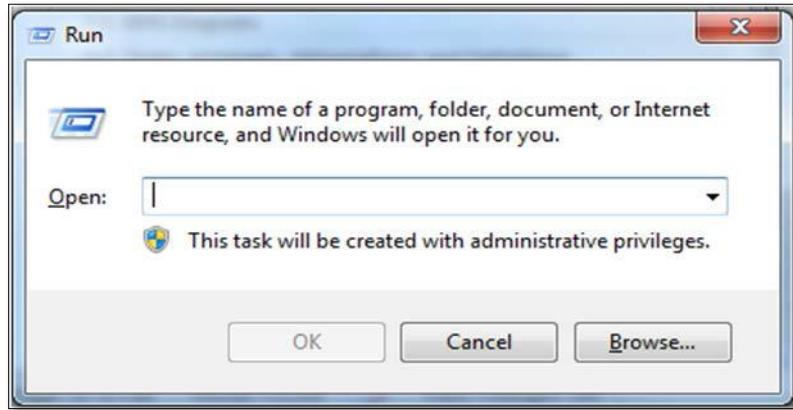


Figure 39- Run Window

- Type in “control userpasswords2”

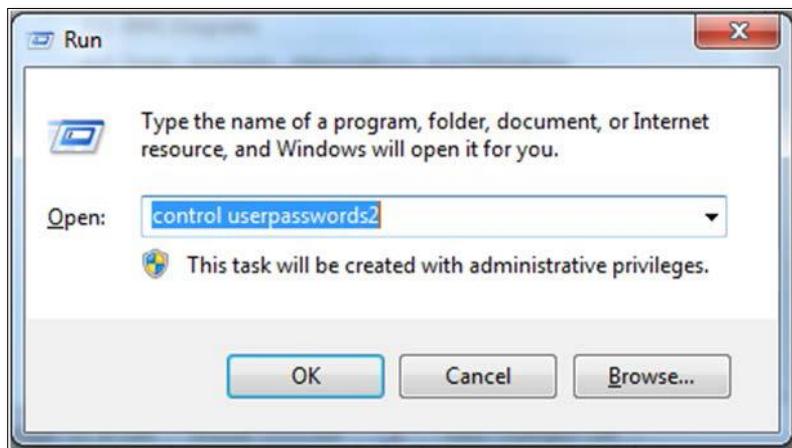


Figure 40- Run Window with Command Entered

- Press Enter. The User Accounts window will display.

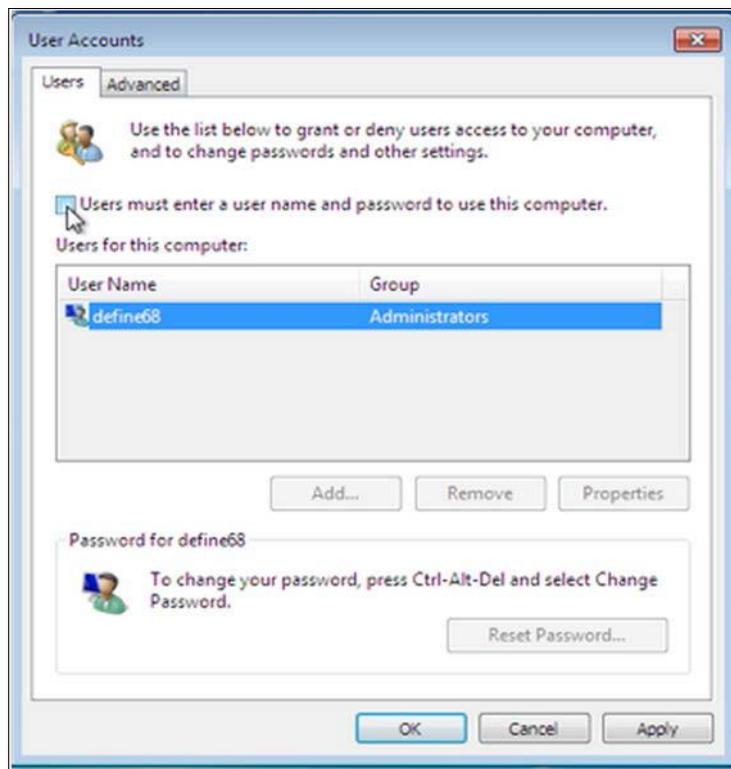


Figure 41- User Accounts Window

- Uncheck the option “Users must enter a user name and password to use this computer” for the BMS Default Kiosk User Account



**Figure 42- User Accounts**

- Click "OK"

Stop Microsoft Lync from opening at startup: **To stop Microsoft Lync from opening at startup follow the steps below**

- *From the Start Menu,*
- *Go to All Programs >Microsoft Lync*
- *Open Microsoft Lync*
- *Go to Tools>Options>Personal*
- *Uncheck “automatically start Lync when I log on to Windows” & “Show Lync in foreground when it starts”.*

#### **2.5.3.4 Set the URL (from step 2.5.1) as the Home Page in Internet Explorer**

The specific Ward Whiteboard Kiosk URL needs to be configured as the Home-Page for the intended browser. The menu to set the default home-page might differ from one browser to another.

For example, for Internet Explorer (IE) 9.0 the user needs to:

- **Select Tools menu**

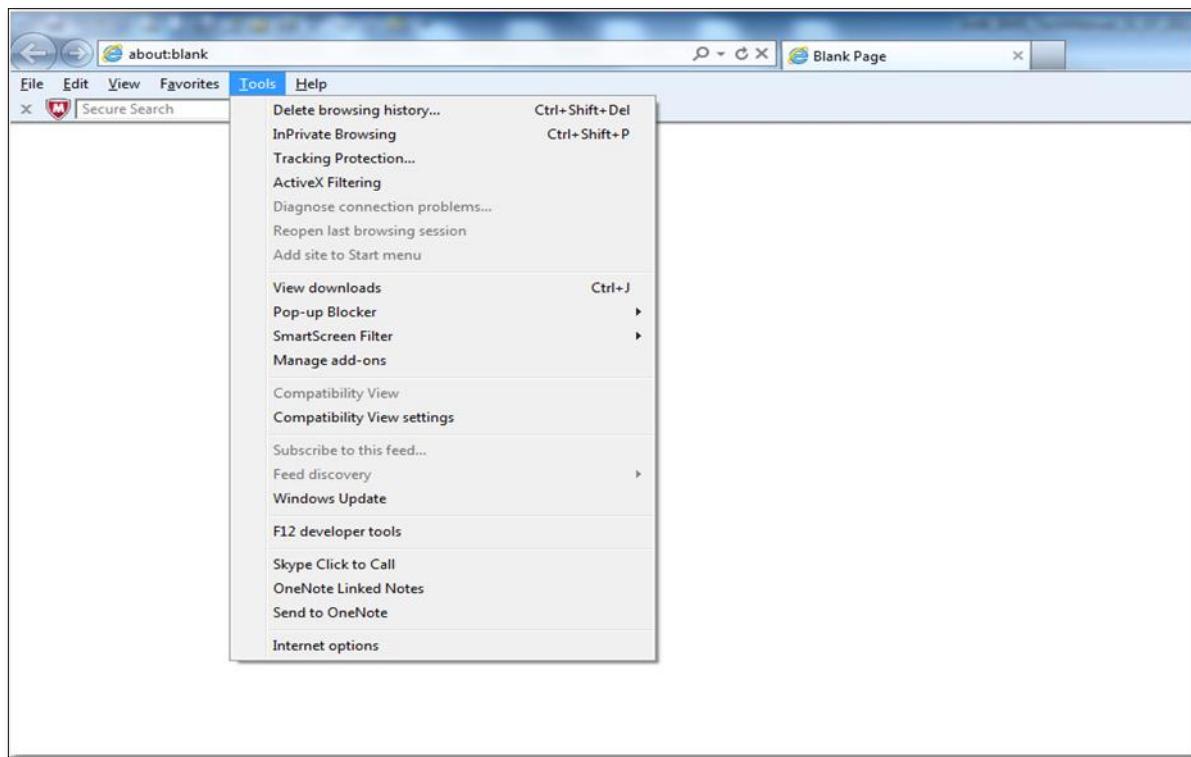


Figure 43- Tools Menu of Internet Explorer

- Select *Internet Options*
- On the General tab, under the homepage text field enter the URL
- Click *OK*

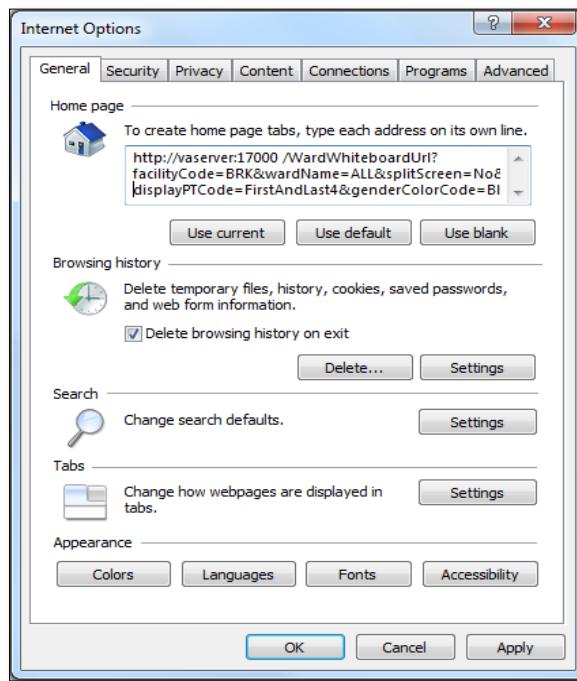


Figure 44- General Tab of Internet Options

### 2.5.3.5 Add BMS to the “Trusted Sites”

To add BMS to “Trusted Sites” in Internet Explorer

- *Go to Tools>Internet Options>Security>Trusted sites>Sites*
- *In the “Add this website to the zone:” field, enter https://vaww.bms.va.gov*
- *Click Add, Click OK*

### 2.5.3.6 Add the launch of the browser to the Windows start up commands.

The next step is to add to the startup commands the launch of the chosen browser.

**NOTE:** This operation might differ from one version of Windows to another. For example, for Windows 7 the steps needed are:

- *Click Start*
- *Select All Programs*
- *Right click on the Startup folder*
- *Select Open*


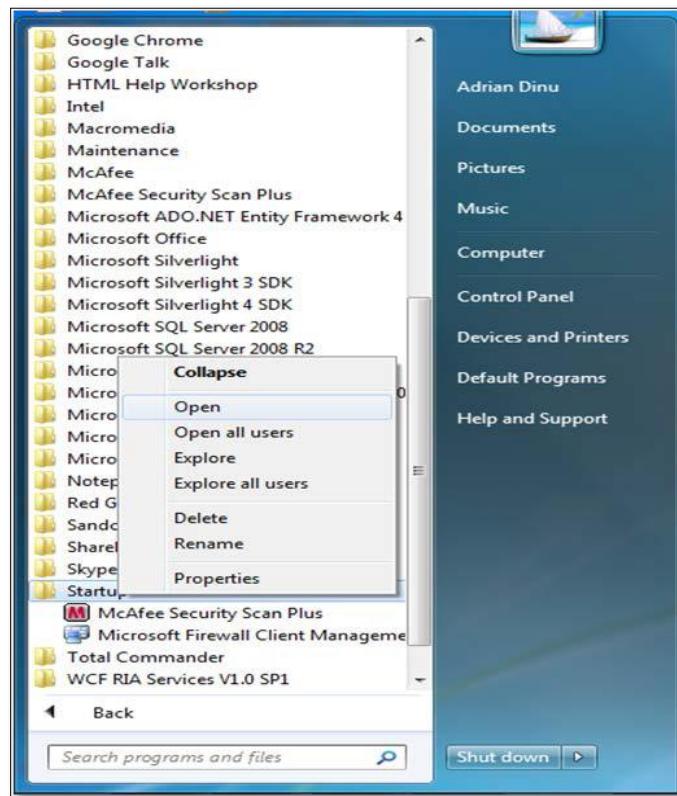


Figure 45- Open Option

- *Create a shortcut of the Internet Explorer and copy it to Startup folder*

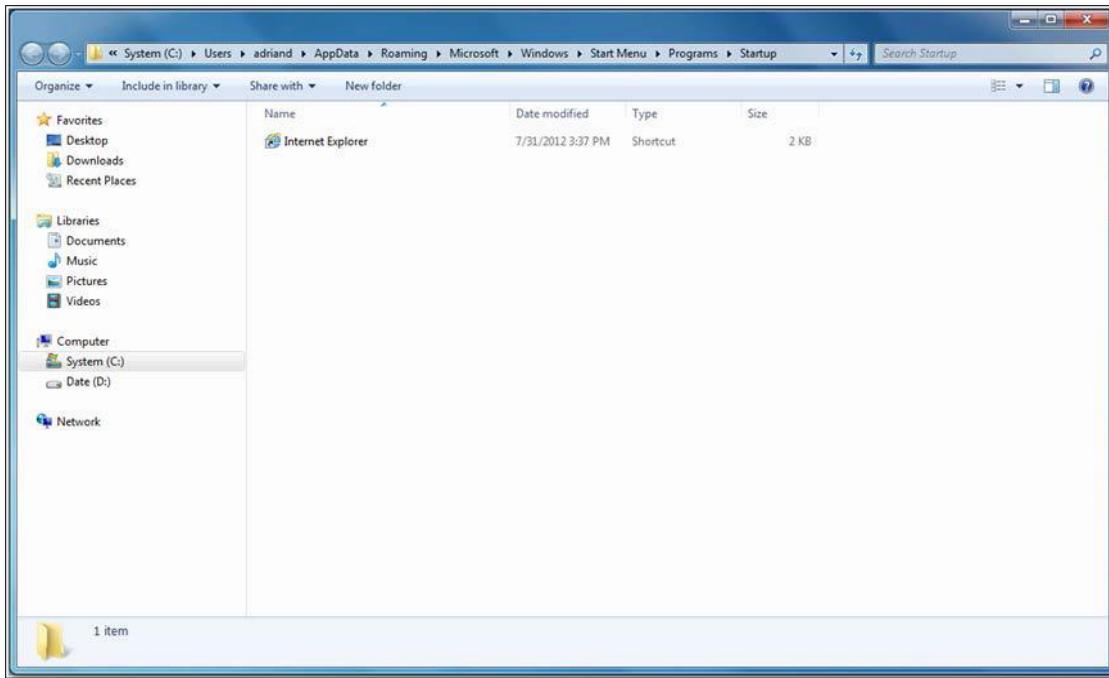

**Figure 46- Internet Explorer Shortcut**

#### **2.5.3.7 Test the Kiosk**

Close Internet Explorer. Restart Internet Explorer. The BMS Ward Whiteboard for the Kiosk should come up.

#### **2.5.3.8 Set the Registry Keys to configure the Kiosk for local site use.**

The purpose of the following steps is to configure Kiosk workstation to serve one function only: BMS Ward Whiteboard display. The following instruction leads you through a series of steps that effectively lock down the workstation for this purpose. Access to workstation software and/or desktop will be prevented after the configuration setup is complete. The Whiteboard Kiosk is read only.

\*It is recommended that prior to performing the configuration steps outlined in this section a backup of the existing system be created for rollback / recovery purposes, and that a restoration point be created.

- 1) Modify Registry Settings

#### **Restriction.reg**

```
Windows Registry Editor Version 5.00

[HKEY_LOCAL_MACHINE\SOFTWARE\Policies\Microsoft\Internet Explorer\Restrictions]
"NoContextMenu"=dword:00000001
"NoFileOpen"=dword:00000001
"NoOpenInNewWnd"=dword:00000001
```

**Figure 47-Windows Registry Editor**

- 2) Run Restrictions.reg by double-clicking filename from Windows Explorer. Verify settings have been applied.

### 3) Modify Local Group Policy Settings

For local group policy changes run gpedit.msc and make the following changes:

User Configuration\Administrative Templates\System\Ctrl+Alt+Del Options	
Remove TaskManager .....	Disable
Remove Lock Computer .....	Enable
Remove Change Password.....	Enable
Remove Logoff .....	Enable

User Configuration\Administrative Templates\Control Panel\Display	
○ Password protect the screen saver.....	Disabled

Verify all settings have been applied. The purpose of these settings is to lock down the workstation for one purpose only, BMS Whiteboard Kiosk.

### 4) Reboot Kiosk Machine to test set up.

\*Note; if Kiosk continually “freezes”, please contact the Service Desk to have an IE Refresher script installed.

## 2.6 Whiteboard Snapshot Configuration

In order to configure the Whiteboard snapshot certain steps, need to be completed:

1. Create snapshot folder
2. Define network share
3. Assign rights to user
4. Assign snapshot folder path to ward group
5. Associate scheduler with the whiteboard report

Suppose the goal is to configure the settings for two BMS Ward Groups: WARD GROUP 1 and WARD GROUP 2.

Assuming that these two Ward groups are in different physical locations, a designated workstation will be assigned for each one of them.

For the purpose of example, these workstations are called: WARDGROUP1-PC and WARDGROUP2-PC.


### 2.6.1 Create Snapshot Folder

On WARDGROUP1-PC and WARDGROUP2-PC, a folder should be created for this purpose. For example, assume that this folder is on the “C:” drive, like this “C:\WhiteboardSnapshot”.

*On Windows 7 the needed operations are:*

- Click Start button
- Select All Programs
- Select Accessories folder
- Click Windows Explorer
- Go to C drive

- Right click on C drive
- Select New folder
- Enter the name of the folder, e.g. WhiteboardSnapshot

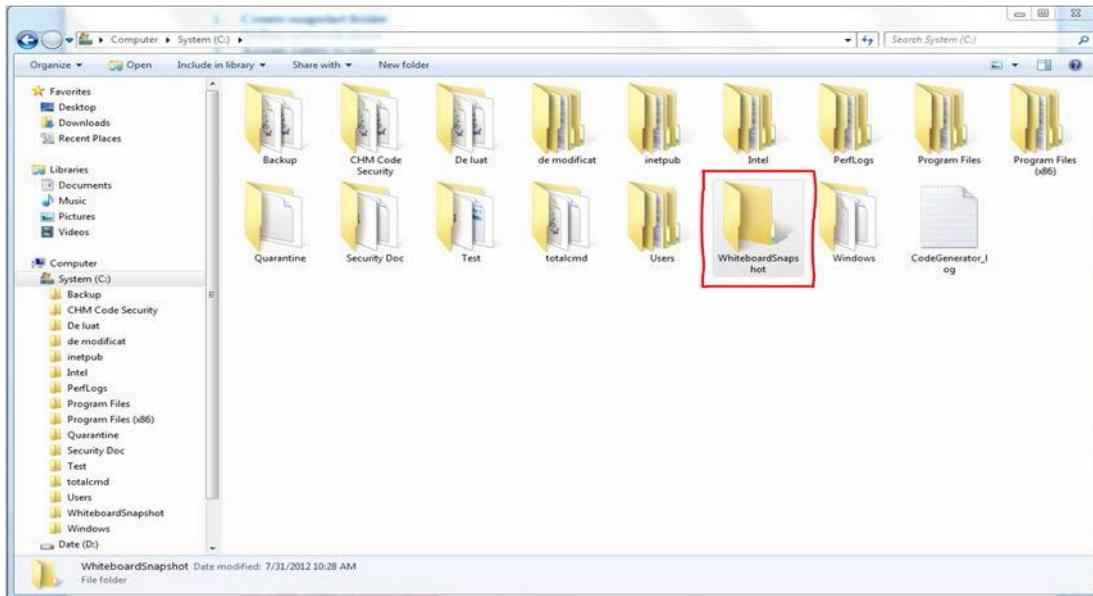


**Figure 48- Whiteboard Snapshot Folder**

## 2.6.2 Define Network Share

For these two folders (one on each computer) the Network Admin needs to define network shares. For example, assume that the network share name on each computer is “WhiteboardSnapshot”.


*Note: The Windows menu that allows the configuration of folder sharing might be different from one version of Windows to another. For example, for Windows 7 the needed operations are:*

- Navigate to the “WhiteboardSnapshot” folder, right-click it and choose Properties

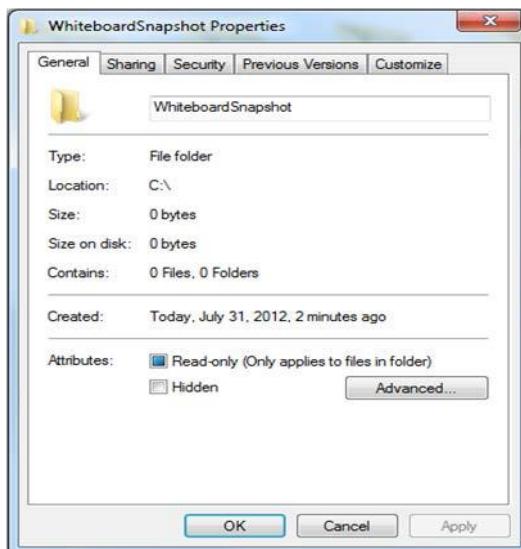


**Figure 49- Whiteboard Snapshot Folder Properties**

- Go to Sharing tab and select Advance Sharing option.

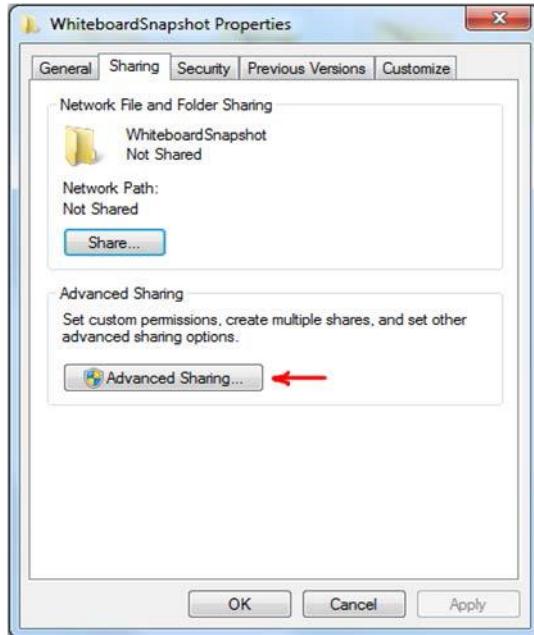

**Figure 50- Advanced Sharing Option**

- In Advanced Sharing dialog, enable Share this folder option. It will automatically add folder's name as Share name.

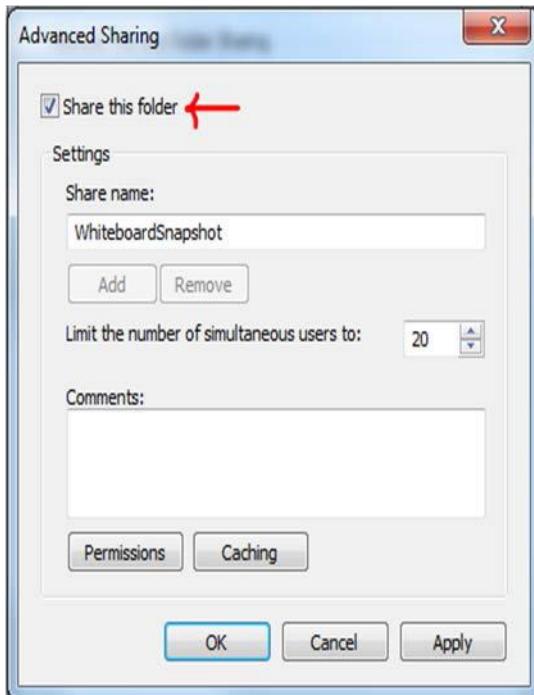

**Figure 51- Share this Folder Option**

### 2.6.3 Assign Rights to Master BMS Service Account User

The BMS Application runs under a service account. AICT has created the Windows User (**(acc\VAACBMSPrd)** as the master service account that the BMS Services runs under. The Windows user (**(aac\VAACBMSPrd)** that is configured to be the Login that runs the four BMS Windows Services needs to have full rights to these shares.

This user must have full control on each facilities file folder that is used to store the Whiteboard Contingency Reports.

*On Windows 7 the needed operations are:*

- Having Advanced Sharing window open click on Permissions button to set the folder's permissions.

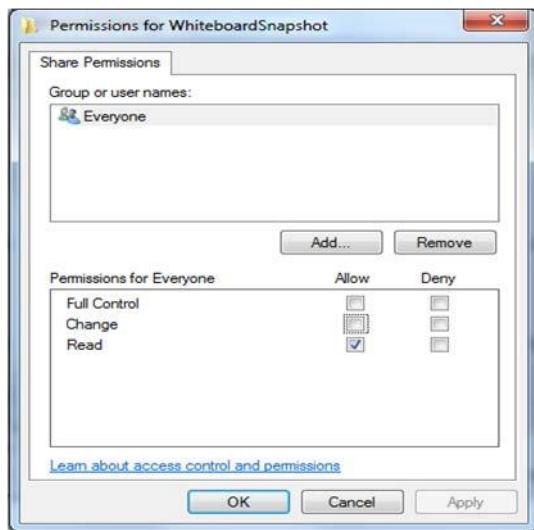


Figure 52- Permissions for Whiteboard Snapshot

- In the Permissions window click Add button to set the network user rights on the shared folder.


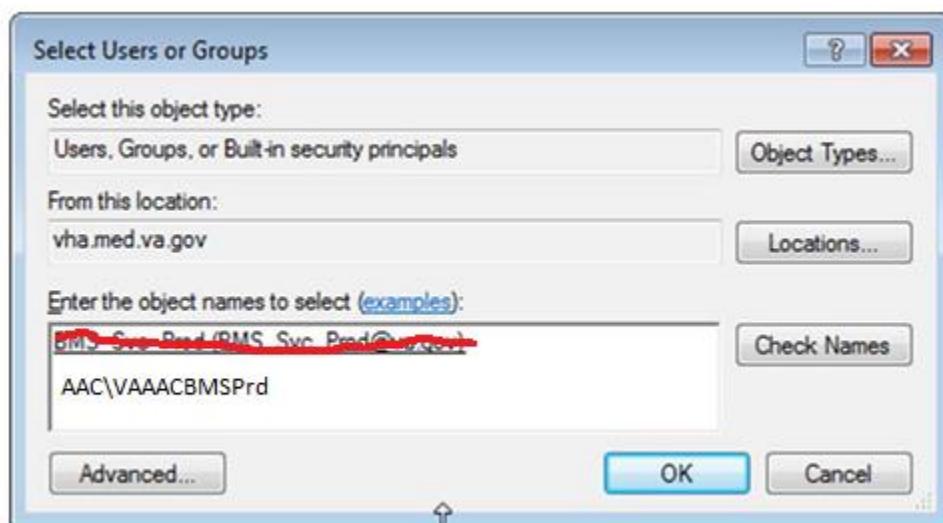


Figure 53-Select Users or Groups Window

- Click “Advanced” button to select user.

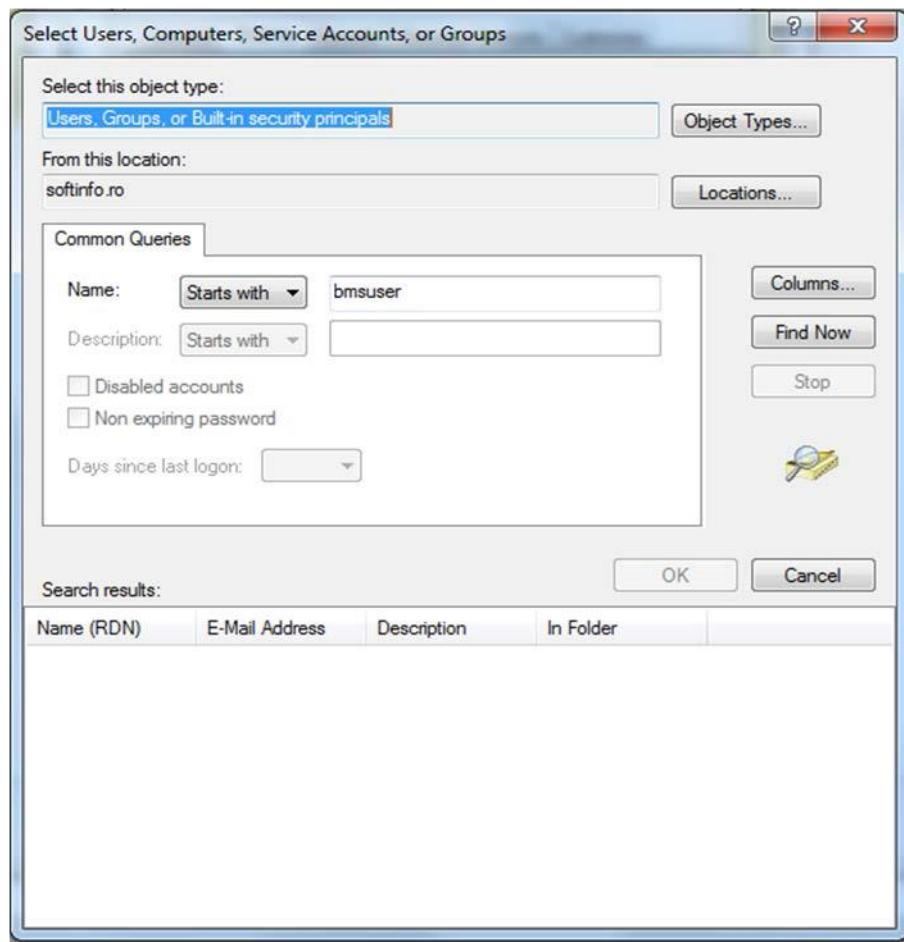

**Figure 54- Advanced Section of Select Users or Group Window**

- Enter the name of the user (**aac\VAAACBMSPrd**) that runs the two BMS Windows Services. Click Find Now button.

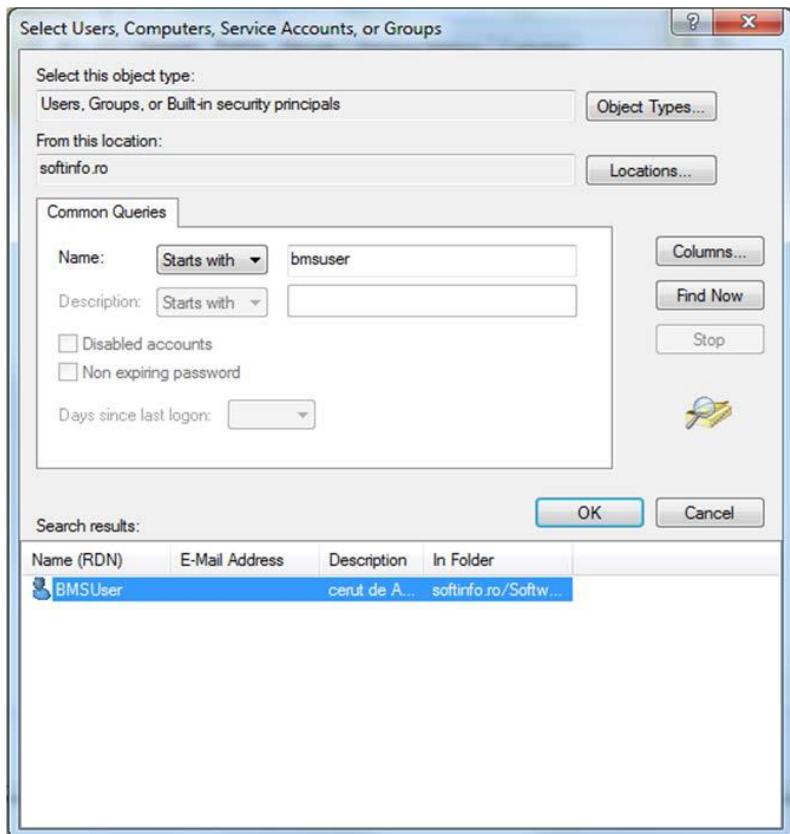


Figure 55- Search Result Section

- Scroll down the Search results section to select the user. Once done, click OK. It will add the user within the object names section.


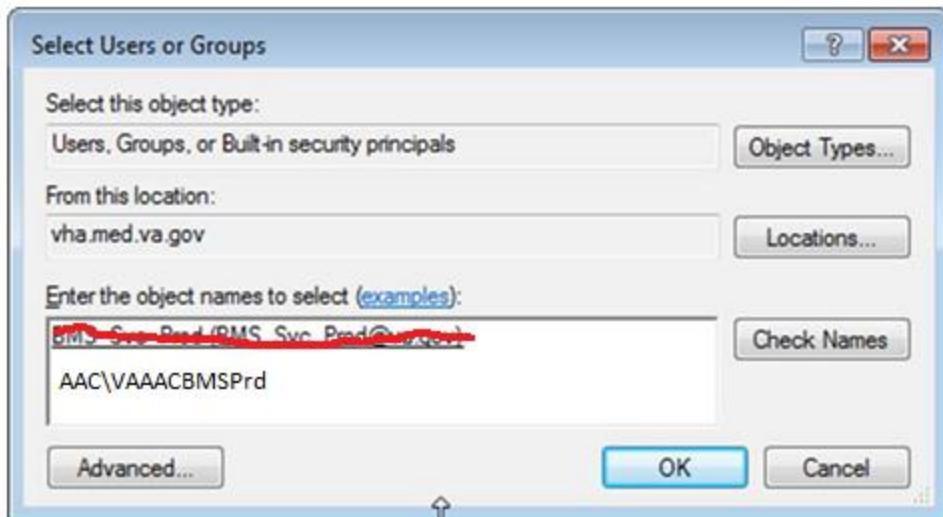


Figure 56- Object Names Section

*Clicking OK will add folder access permission for user and takes you back to Permissions dialog, allowing you to configure the permissions for newly added users.*

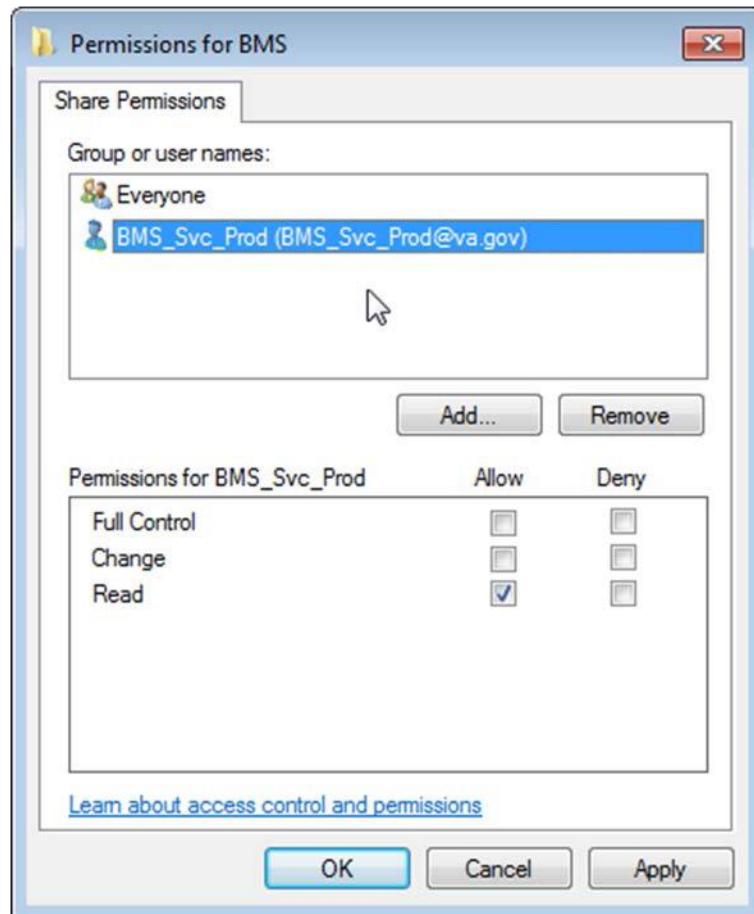

**Figure 57- Permissions Window**

- Select user, and from Permissions section check Full Control.

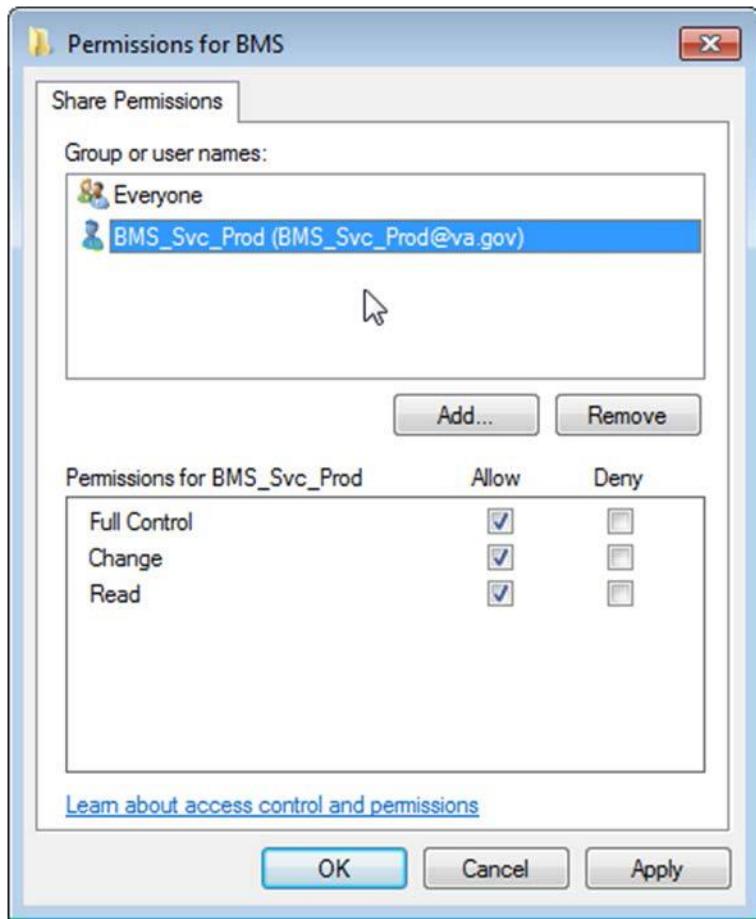


Figure 58- User Permissions

- Click *Ok* to close Permissions window. It will take you back to Advanced Sharing window.

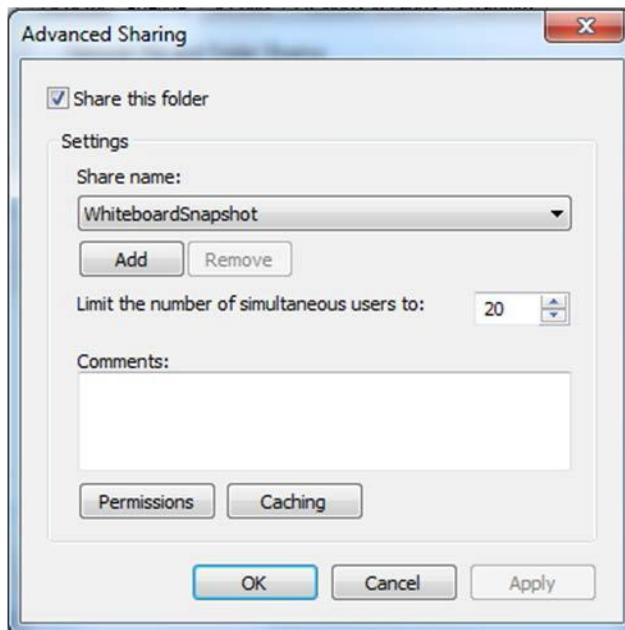


Figure 59- Advanced Sharing Window

- Now, click OK to share the folder.
- Close Whiteboard Snapshot properties window.

Having these two folders shared and having that user given the rights previously mentioned, if someone is logged in the network with that user, he/she could access those folders from Windows Explorer using an URI address. See screenshot below:

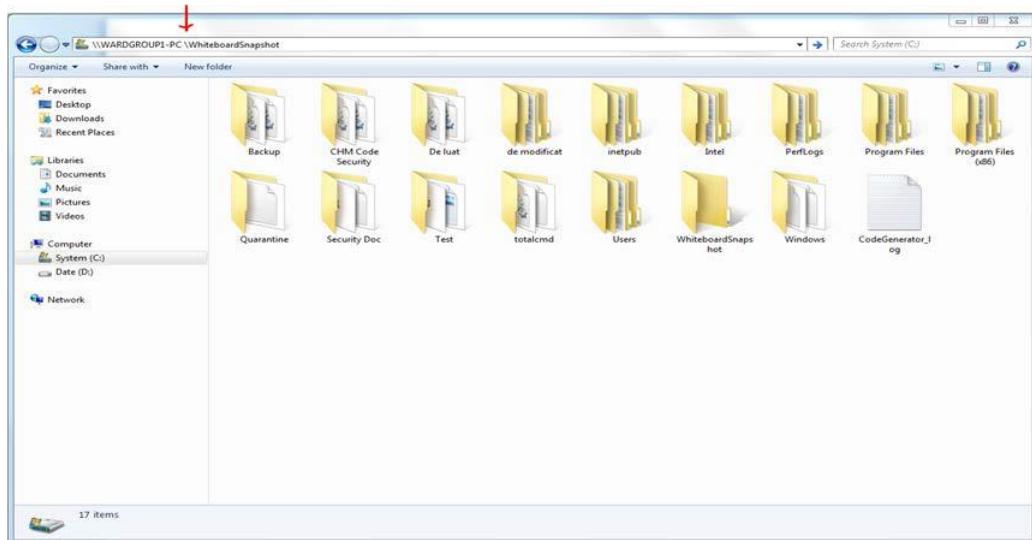


Figure 60- WardGroup1-PC Path

## 2.6.4 Assign Snapshot Folder Path to Ward Group

Within the BMS Application, under Site Settings and then Contingency Settings page, the Admin should enter the values as captured in the screenshot (\\\WARDGROUP1-PC\WhiteboardSnapshot for WARD GROUP 1 and respectively \\\WARDGROUP2-PC \WhiteboardSnapshot for WARD GROUP 2).

**NOTE:** The Windows User (acc\VAAACBMSPrd) must have full read/write access to this folder.

Contingency Settings - VA BOSTON HEALTHCARE SYSTEM, BROCKTON CAMPUS (BRK)	
Ward Group	Whiteboard Report Path
WARD GROUP 1	\\\WARDGROUP1-PC\WhiteboardSnapshot
WARD GROUP 2	\\\WARDGROUP2-PC \WhiteboardSnapshot
WG LILI	
<input type="button" value="Save"/>	

Figure 61-Contingency Settings Page

## 2.6.5 Associate Scheduler with Whiteboard Report

Within the BMS Application, Facility Home page, under Site Options and then Background Processors page, a Scheduler should be associated in the Whiteboard Report section.

Under the Whiteboard Report section:

- In the “Add/Update Scheduler:” field, select the schedule frequency that Whiteboard should be backed

up.

- Click Save Scheduler button.

[Return to Admin Page](#)

#### Background Processors - VA BOSTON HEALTHCARE SYSTEM, BROCKTON CAMPUS (BRK)

The screenshot shows two stacked configuration panels. The top panel is titled 'Whiteboard Report' and contains fields for 'Current Scheduler' (set to 'NONE') and 'Add/Update Scheduler' (set to 'Every 4 hours'). A 'Save Scheduler' button is at the bottom. The bottom panel is titled 'Patients Pending Bed Placement List' and also has 'Current Scheduler' set to 'NONE'. It includes dropdowns for 'Add/Update Method' and 'Add/Update Scheduler', both currently set to 'Select A Method' and 'Select A Scheduler' respectively. A 'Save Scheduler' button is located at the bottom right of this panel. A 'Cancel' button is positioned at the bottom center of the entire configuration area.

| [BMS Home](#) | [Icon Legend](#) | [Information](#) |

**Figure 62- Whiteboard Report Scheduler Association**

## 2.7 EMS Mobile Device Configuration

In order to configure the BMS EMS Mobile Devices, the following steps must be completed:

- The local IS must create a local Service Account with a password that never expires and does not change. This account must not have any kind of policy that restricts its use to specific computers. The EMS Mobile Device will use this account to access the EMS Mobile page. This local Service Account can be the same as the Whiteboard Kiosk Default User Account created in Section 2.5.2.
- Each facility must enter the local Service Account and Password in the EMS Default User and Password fields on the Facilities Settings page.
- Configure the Mobile Device so that when it boots up, it will automatically open IE and go to the specified URL.

### 2.7.1 Configure EMS Mobile Device Default Login User

For the current facility, a default user must be configured in the BMS application for the EMS Mobile Device.

To accomplish this, the Facility Admin User must do the following:

- Go to the Facility Home Page.
- Click on the Site Options link.
- Click on the Facility Setting link.
- Fill the fields “EMS Default User Name:”, “EMS Password:”, and “EMS Password Confirm:” with the BMS Local Service Account.

[Return to Admin Page](#)

Facility Configuration - VA NORTH TEXAS HEALTH CARE SYSTEM: DALLAS VA MEDICAL CENTER (NTX)	
PARAMETER	OPTIONS
BMS Server Time Zone	CENTRAL STANDARD TIME <input type="button" value="CST"/> <input type="button" value="Yes"/> <input type="button" value="No"/>
Facility Site Time Zone	
Auto-Removal Patients Pending Bed Placement List?	
Integrated Facility?	
Facility Name:	VA NORTH TEXAS HEALTH CARE SYSTEM: DALLAS VA
Facility Address 1:	4500 S. LANCASTER RD.
Facility Address 2:	DALLAS, TEXAS 75216
Facility Point-of-Contact:	JEFFREY D ALLEN
Facility POC Email:	JEFFREYD.ALLEN@VA.GOV
Facility POC Telephone:	214 857 4607
Local Time Adjust:	0
EMS Default User Name: EMS Password: EMS Password Confirm:	vphantxbedmgmt   
Whiteboard Kiosk Default User Name: Whiteboard Kiosk Password: Whiteboard Kiosk Password Confirm:	vphantxbedmgmt   
<input type="button" value="Submit"/> <input type="button" value="Cancel"/>	

| [BMS Home](#) | [Icon Legend](#) | [Information](#) |

**Figure 63- EMS Fields Filled on the Facility Settings Page**

- Click the Submit button.

**Table 16-Facility Settings Page Parameters**

Column	Description
EMS Default User Name:	The BMS Service Account ID needed to load the EMS Mobile Page for Mobile Devices.
EMS Password:	The BMS Service Account ID password needed to load the EMS Mobile Page for Mobile Devices.
EMS Password confirm:	The confirmation of the password.

This setup can also be completed by the system Support User:

- Go to the BMS Admin Page
- Click on the Edit BMS Facility Settings link
- Click on the Facility Name Drop Down and select the name of the Facility to be configured
- Fill the fields “EMS Default User Name”, “EMS Password” and “EMS Password Confirm” with the BMS Local Service Account

Admin Menu      ADMINISTRATION SECTION - FACILITY EDIT      Logout

Select Facility Name:	NTX - DALLAS (549 - ACTIVE: YES)		
NTX (549 - DALLAS)			
Facility Site ID:	NTX		
Full Facility Name:	VA NORTH TEXAS HEALTH CARE SYSTEM: DALLAS VA		
Facility Point-of-Contact:	JEFF ALLEN		
Facility POC Email:	JEFFREY.D.ALLEN@VA.GOV		
Facility POC Telephone:	214 857-4807		
Facility Address 1:	4800 S. LANCASTER RD.		
Facility Address 2:	DALLAS, TEXAS 75216		
Facility City/State/ZIP:	DALLAS	TX	75216
User operations:	Selected	User Name	BMS, Read    BMS, Write
	<input type="checkbox"/>	aac.dva.va.gov\VAACBARKSJ	<input checked="" type="checkbox"/> <input type="checkbox"/>
	<input type="checkbox"/>	aac.dva.va.gov\vasachernas	<input checked="" type="checkbox"/> <input type="checkbox"/>
	<a href="#">Add User</a>		
	<a href="#">Remove Selected</a>		
VISN:	17	BMS Server Time Zone:	Central Standard Time
Region:	2	Facility Site Time Zone:	Central Standard Time
BMS Active/Live Site?	Yes	Auto-Removal Patients Pending Bed Placement List?	Yes
Integrated Facility?	No	Medical Center ID #?	<a href="#">SELECT MEDICAL CENTER</a>
Integrated Site List:	Select Existing List	ADT Prefix:	
Ward Prefix:		ADT Suffix:	
Ward Suffix:		Event Mail Sender:	VHANTXBMSVENTMA
EMS Mail Sender:	VHANTXBMSMAILER@	Site Alias:	
Site Alias:		Local Time Adjust:	0
Site Alias:			
EMS Default User Name:	vhantxbedmgmt	Whiteboard Kiosk Default User Name:	vhantxbedmgmt
EMS Password:		Whiteboard Kiosk Password:	
EMS Password Confirm:		Whiteboard Kiosk Password Confirm:	
<a href="#">Submit</a> <a href="#">Cancel</a>			

[Back to Regional Page](#)

**Figure 64-EMS Fields Filled on the BMS Admin Page**

- Click the Submit button

**Table 17-BMS Admin Page Parameters**

Column	Description
EMS Default User Name:	The BMS Service Account ID needed to load the EMS Mobile Page for Mobile Devices.
EMS Password:	The BMS Service Account ID password needed to load the EMS Mobile Page for Mobile Devices.
EMS Password confirm:	The confirmation of the password.

## 2.7.2 Configure EMS Mobile Device URL

For the current facility, the EMS Device URL must be configured in the EMS Mobile Device. The URL to be entered has a special format:  
<https://vaww.bms.va.gov/EMSMobileLogon?code=BRK>.

**Table 18-Description and Configuration for EMS Mobile Device URL Parameters**

Parameter	Short Description	Options
Code	Code of facility (e.g. BROCKTON = BRK)	Enter the 3-character facility ID.

EMS staff can access the BMS Web page for mobile devices at the URL set up by their local IS staff. Be sure to use the code of the facility for which access is needed.

The following page is displayed:



**Figure 65-EMS Staff Page for Mobile Devices**

## **2.8 VistA Integration**

This chapter describes the process of importing vocabularies, entities, patient admission, transfer, discharge (ADT) and patient pending bed placement information from VistA.

In order to integrate with VistA certain steps should be completed:

1. Choose VistA site
2. Define Schedulers
3. Run Scheduler
4. View Audit Results

### **2.8.1 Choose VistA Site**

VistA Sites tab from Background Processors page of Admin section allows the user to view the list of VA facility sites sharing the same VistA instance and to add a new VA facility to a VistA instance.

#### **2.8.1.1 Adding a New VistA Site**

To add a VA facility site to a VistA instance follow the steps presented below.

1. From the Background Processors page of Admin section select VistA Sites to display the page in the following image. A list of VA facility sites is displayed in the column to the left of the page.

Admin Menu      Logout

**Background Processors**

VistA Sites	Schedulers	VistA Integration	Audit	NUMI	Whiteboard Report
-------------	------------	-------------------	-------	------	-------------------

[Add new VistA site](#)

**Defined VistA Sites**

- [V03NYN - 630](#)
- [V09LEX - 596](#)
- [V11IND - 583](#)
- [V17NTX - 549](#)
- [V18ABQ - 501](#)
- [V18AMA - 504](#)
- [V18BIG - 519](#)
- [V18ELP - 756](#)
- [V18PHO - 644](#)
- [V18PRE - 649](#)
- [V18TUC - 678](#)
- [V19CHY - 442](#)
- [V19DEN - 554](#)
- [V19FHM - 436](#)
- [V19GRU - 575](#)
- [V19SH - 666](#)
- [V19SLC - 660](#)
- [V20ANC - 463](#)
- [V20BOI - 531](#)
- [V20POR - 648](#)
- [V20PUG - 663](#)
- [V20ROS - 653](#)
- [V20SPO - 668](#)
- [V20VCO - 692](#)

**VistA Site**

Name:

Time Zone:

**Connections**

ODBC	Connection string:	<input type="text"/>	<input type="button" value="Test Connection"/>
User:	<input type="text"/>		
Password:	<input type="text"/>		
MDWS	Mdws Endpoint:	<input type="text" value="MdwsEndpointUrl_1 - http://va"/>	<input type="button" value="Test Connection"/>

[Back to Regional Page](#)

**Figure 66-Adding a VistA Site**

2. Click the Add new VistA site link then from the VistA Site area use the Name field to select the code of the site you want to add to the current VistA instance, and then select the Time Zone.

In the Connections area you can choose between two connection methods: ODBC, MDWS and VIA. Fill in the following data for the ODBC method:

**Table 19-New VistA Site Parameters**

Column	Description
Connection String	The connection string for the ODBC method.
User	The username for the connection.
Password	The password associated to the user account.
MDWS Endpoint	***MDWS available to be selected but no longer supported.
VIA	Select VIA connector.

You can use the Test Connection buttons to verify the connection and press the Save button to enter the data into the system.

The newly added site will be added in the sites list to the left of the screen.

## 2.8.2 Define Schedulers

The Schedulers tab from Background Processors page of Admin section displays a list of schedulers defined by user. It allows the user to add new schedulers, edit or remove old schedulers.

NOTE: To run the schedulers, the VistA Integration tab must be used (see next section VistA Integration Bed Management Solution (BMS)  
Technical Manual

for details).

The Schedulers tab is displayed as in the following image:

The screenshot shows the 'Background Processors' interface with the 'Schedulers' tab selected. A sub-form titled 'Add new scheduler' is displayed. It includes fields for 'Name' (set to 'Every hour'), 'Recur every' (set to '1 Day'), 'Time Zone' (set to 'CST'), and two options for scheduling: 'Occurs once at' (set to '01 : 00') and 'Occurs every' (set to '1 Hour'). Below these are 'Start Time' and 'End Time' fields both set to '01 : 00'. At the bottom right are 'Save', 'Delete', and 'Cancel' buttons.

**Figure 67-Schedulers Tab**

### 2.8.2.1 Adding a New Scheduler

To add a new scheduler follow the steps presented below.

1. From the Background Processors page select the Schedulers tab.
2. In the Schedulers tab fill in the following data:

**Table 20-New Scheduler Parameters**

Column	Description
Name	The name of the scheduler.
Recur every	The frequency.
Time Zone	Time zone associated with the scheduler.
Occurs once at/Occurs every	The frequency values.

After setting the desired frequency for the new scheduler, do not forget to press the Save button to enter the data into the system.

### 2.8.3 Run Scheduler

The VistA Integration tab is used to run (automatically or manually) the defined schedulers and to select which data categories will be affected by a scheduler's action.

The VistA Integration tab is displayed as in the following image:

**Background Processors**

VistA Sites	Schedulers	VistA Integration	Audit	Numi	Whiteboard Report
Current Method	Current Scheduler	V01BHS - 523			
<input type="checkbox"/> <a href="#">ADT</a> <input type="checkbox"/> <a href="#">Patients Pending Bed Placement List</a> <input type="checkbox"/> <a href="#">Vocabularies</a> <input type="checkbox"/> <a href="#">Orderable Item</a> <input type="checkbox"/> <a href="#">Specialty</a> <input type="checkbox"/> <a href="#">Treating Specialty</a> <input type="checkbox"/> <a href="#">Facility Movement Type</a> <input type="checkbox"/> <a href="#">Entities</a> <input type="checkbox"/> <a href="#">Hospital Location</a> <input type="checkbox"/> <a href="#">Patient</a> <input type="checkbox"/> <a href="#">Room Bed</a> <input type="checkbox"/> <a href="#">Ward Location</a> <input type="checkbox"/> <a href="#">Medical Center Division</a>		MDWS	Every 4 hours	<b>Details</b> Data: <input type="text" value="Specialty"/> Method: <input type="text" value="MDWS"/> Scheduler: <input type="text" value="Every 4 hours"/>  <b>Run Job</b> Method: <input type="text" value="MDWS"/> Start Time: <input type="text" value="09/07/12"/> <input type="button" value="..."/> <input type="text" value="00 : 00"/> End Time: <input type="text" value="09/07/12"/> <input type="button" value="..."/> <input type="text" value="00 : 00"/>	
<input type="button" value="Save"/> <input type="button" value="Cancel"/> <input type="button" value="Run"/>					

[Back to Regional Page](#)**Figure 68-VistA Integration Tab**

From the field in the upper part of the page select the VistA site where the scheduler(s) will run.

Next step:

- Either click one data category from the column to the left (its name will appear in the Data field) and then select a method and scheduler from the Method and Schedulers fields in the Details area: this will cause the selected scheduler to run at the time set for it in the Schedulers tab and to bring data from the selected category.
- Or select several data categories (using the check-boxes) then select a connection method from the Run Job area, set the Start time/End time and click the Run button: this will cause the scheduler set using the selected method to start running now and bring the data from the selected categories.

## 2.8.4 View Audit Results

The Audit tab displays the results of the operations performed in the VistA Integration tab.

The Audit tab is displayed as shown in the following image.

## Background Processors

Vista Site	Schedulers	Vista Integration	Audit	Numi	Whiteboard Report
Vista site, <input checked="" type="checkbox"/> V01BHS - 523	data types <input type="checkbox"/> ADT <input checked="" type="checkbox"/> Patients Pending Bed Placement List <input type="checkbox"/> Vocabulary <input type="checkbox"/> Orderable Item <input type="checkbox"/> Specialty <input type="checkbox"/> Treating Specialty <input type="checkbox"/> Facility Movement Type <input type="checkbox"/> Entities <input type="checkbox"/> Hospital Location <input checked="" type="checkbox"/> Patient <input type="checkbox"/> Room Bed <input type="checkbox"/> Ward Location <input type="checkbox"/> Medical Center Division	and method <input type="checkbox"/> ADT <input type="checkbox"/> ODBC <input checked="" type="checkbox"/> MDWS	with status <input type="checkbox"/> Succeeded <input type="checkbox"/> Failed <input type="checkbox"/> Running <input type="checkbox"/> Partially Succeeded	all audit log entries registered <input checked="" type="radio"/> Today <input type="radio"/> Last week <input type="radio"/> Last month <input type="radio"/> During this specific period 08/04/12 [ ] 00 : 00 : 00 09/05/12 [ ] 00 : 00 : 00	
<a href="#">Filter By</a>					

[Back to Regional Page](#)**Figure 69- Audit Tab**

The options to the left of the page allow the user to determine the filter criteria for the generated audit reports. The options to the right of the screen allow the user to select the type of operation to be captured by the audit report as well as the time interval for the audit.

After selecting the desired criteria, click the Filter by button to display the page as in the following image.

Vista Site	Planned	Data	Row No	Start Date	End Date	Launch Type	Parameters	Status	Details
V01BHS	ADWS	Specialty	112	08/10/12 10:19:01	08/10/12 10:19:54	Manual	(StartDate, 8/10/2012 12:00:00 AM)(EndDate, 8/10/2012 12:00:00 AM)	Succeeded	<a href="#">Details</a>
V01BHS	ADWS	Treating Specialty	113	08/10/12 10:19:04	08/10/12 10:19:57	Manual	(StartDate, 8/10/2012 12:00:00 AM)(EndDate, 8/10/2012 12:00:00 AM)	Succeeded	<a href="#">Details</a>
V01BHS	ADWS	Facility Movement Type	114	08/10/12 10:19:07	08/10/12 10:19:56	Manual	(StartDate, 8/10/2012 12:00:00 AM)(EndDate, 8/10/2012 12:00:00 AM)	Succeeded	<a href="#">Details</a>
V01BHS	MDWS	Orderable item	245	08/10/12 10:19:26	08/10/12 10:19:49	Manual	(StartDate, 8/10/2012 12:00:00 AM)(EndDate, 8/10/2012 12:00:00 AM)	Succeeded	<a href="#">Details</a>
V01BHS	MDWS	Specialty	115	08/10/12 10:25:40	08/10/12 10:25:41	Manual	(StartDate, 8/10/2012 12:00:00 AM)(EndDate, 8/10/2012 12:00:00 AM)	Succeeded	<a href="#">Details</a>
V01BHS	MDWS	Treating Specialty	116	08/10/12 10:25:41	08/10/12 10:25:42	Manual	(StartDate, 8/10/2012 12:00:00 AM)(EndDate, 8/10/2012 12:00:00 AM)	Succeeded	<a href="#">Details</a>
V01BHS	MDWS	Facility Movement Type	117	08/10/12 10:25:42	08/10/12 10:25:42	Manual	(StartDate, 8/10/2012 12:00:00 AM)(EndDate, 8/10/2012 12:00:00 AM)	Succeeded	<a href="#">Details</a>
V01BHS	MDWS	Orderable item	246	08/10/12 10:25:42	08/10/12 10:25:44	Manual	(StartDate, 8/10/2012 12:00:00 AM)(EndDate, 8/10/2012 12:00:00 AM)	Succeeded	<a href="#">Details</a>
V01BHS	MDWS	Orderable item	247	08/10/12 10:25:52	08/10/12 10:37:53	Manual	(StartDate, 8/10/2012 12:00:00 AM)(EndDate, 8/10/2012 12:00:00 AM)	Succeeded	<a href="#">Details</a>
V01BHS	MDWS	Hospital Location	83	08/10/12 10:41:40	08/10/12 10:41:53	Manual	(StartDate, 8/10/2012 12:00:00 AM)(EndDate, 8/10/2012 12:00:00 AM)	Succeeded	<a href="#">Details</a>
V01BHS	MDWS	Ward Location	24	08/10/12 10:43:53	08/10/12 10:45:58	Manual	(StartDate, 8/10/2012 12:00:00 AM)(EndDate, 8/10/2012 12:00:00 AM)	Succeeded	<a href="#">Details</a>
V01BHS	MDWS	Room Bed	87	08/10/12 10:43:59	08/10/12 10:44:40	Manual	(StartDate, 8/10/2012 12:00:00 AM)(EndDate, 8/10/2012 12:00:00 AM)	Succeeded	<a href="#">Details</a>
V01BHS	MDWS	MEDICAL CENTER DIVISION	8	08/10/12 10:44:40	08/10/12 10:44:40	Manual	(StartDate, 8/10/2012 12:00:00 AM)(EndDate, 8/10/2012 12:00:00 AM)	Succeeded	<a href="#">Details</a>
V01BHS	MDWS	Orderable item	248	08/10/12 10:44:47	08/10/12 10:45:56	Manual	(StartDate, 8/10/2012 12:00:00 AM)(EndDate, 8/10/2012 12:00:00 AM)	Succeeded	<a href="#">Details</a>
V01BHS	MDWS	Patient	249	08/10/12 10:46:56	08/10/12 10:49:43	Manual	(StartDate, 8/10/2012 12:00:00 AM)(EndDate, 8/10/2012 12:00:00 AM)	Succeeded	<a href="#">Details</a>
V01BHS	MDWS	Orderable item	250	08/10/12 10:53:54	08/10/12 11:20:56	Manual	(StartDate, 8/10/2012 12:00:00 AM)(EndDate, 8/10/2012 12:00:00 AM)	Succeeded	<a href="#">Details</a>
V01BHS	MDWS	Room Bed	87	08/10/12 10:58:44	08/10/12 12:18:48	Manual	(StartDate, 8/10/2012 12:00:00 AM)(EndDate, 8/10/2012 12:00:00 AM)	Succeeded	<a href="#">Details</a>
V01BHS	MDWS	Room Bed	87	08/10/12 10:59:34	08/10/12 12:20:28	Manual	(StartDate, 8/10/2012 12:00:00 AM)(EndDate, 8/10/2012 12:00:00 AM)	Succeeded	<a href="#">Details</a>
V01BHS	MDWS	Room Bed	87	08/10/12 10:59:33	08/10/12 12:24:17	Manual	(StartDate, 8/10/2012 12:00:00 AM)(EndDate, 8/10/2012 12:00:00 AM)	Succeeded	<a href="#">Details</a>
V01BHS	MDWS	Room Bed	87	08/10/12 10:59:47	08/10/12 12:26:51	Manual	(StartDate, 8/10/2012 12:00:00 AM)(EndDate, 8/10/2012 12:00:00 AM)	Succeeded	<a href="#">Details</a>

[Back to Regional Page](#)**Figure 70- View Audit Results**

A list of operations is displayed. For each entry the following data is available:

**Table 21-View Audit Results Columns Report**

<b>Column</b>	<b>Description</b>
VistA	The VistA site where the audit action has been performed.
Method	The method used for connecting to the VistA site.
Data	The type of data retrieved by the VistA integration operation.
Rows no	The number of operations of the selected type captured by the audit action.
Start Date	The start date of the retrieval operation.
End Date	The end date of the retrieval operation.
Launch Type	The way the audit action has been launched.
Parameters	Audit operation start date and time, and end date and time.
Status	The status of the VistA integration action.
Details	Clicking this link will display the number of entries in the report.

## 2.9 NUMI Integration

This chapter describes the process of importing patient level of care information from NUMI.

NUMI connects to VistA for synchronization of patient data using the NUMI Web Service that is part of the Commercial Off the Shelf McKesson product. Authentication to the NUMI Web Service is done by a NUMI supplied secret key.

NUMI Patient Level of Care transaction involves the following steps:

- Change patient level of care in NUMI.
- BMS Reader component will detect the patient level of care in NUMI.
- Patient level of care will be retrieved through a web service method call.
- BMS Writer component will update patient level of care in BMS database.

### Integration Settings

There are a limited number of configuration parameters for NUMI.

- Secret Key
- Number of sites per call
- Path to NUMI web service

These configurations are stored in BMS.Service.Host.exe.config

The current secret key is: <authorization key>

The number of site per call parameter how many sites will be bundled together in a transaction to NUMI. If this number is increased one should consider the frequency in which the calls are scheduled. Adding more sites will increase the transaction size and length.

Currently all NUMI servers operate on port 100 at the specified endpoint  
<https://<servername>.aac.dva.va.gov/Inpatient.asmx>.

In order to integrate with NUMI certain steps should be completed:

1. Choose VistA site
2. Define Schedulers
3. Select Scheduler

### 2.9.1 Choose VistA Site

This step is the same as the one performed on VistA Integration process and can be referenced from [Section 2.7.1](#).

### 2.9.2 Define Schedulers

The process of defining schedulers can be referenced from Vista Integration process, [Section 2.7.2](#).

### 2.9.3 Select Scheduler

The NUMI tab is used to select the scheduler that will connect to the NUMI server and will retrieve data for a certain VistA site.

The NUMI tab is displayed as in the following image.

The screenshot shows a web-based application interface titled "Background Processors". At the top, there is a navigation bar with tabs: "VistA Sites", "Schedulers", "VistA Integration", "Audit", "Numi", and "Whiteboard Report". The "Schedulers" tab is currently active. Below the tabs, there is a search field labeled "Schedulers:" containing "10 minutes" and an "Add" button. A table below the search field has two columns: "Scheduler" and "VistA Sites". The first row shows "Edit Delete" links, followed by "V01BED". At the bottom of the page, there are "Back to Regional Page" and "Logout" links.

**Figure 71-NUMI Tab**

From the Schedulers field select the scheduler created to retrieve the NUMI data then click the Add button: following page is displayed.

The screenshot shows a modal dialog titled "Edit NUMI data Scheduler". It contains a list of checkboxes for various sites: V01BED, V01BHS, V01BOS, V01CON, V01MAN, V01NFM, V01PRO, V01TOG, V01WRJ, V02UNY, V03BRX, V03BYN, V03EAS, V03MOR, V03NOP, and V03NYN. The checkbox for "V01BED" is checked. At the bottom of the dialog is a "Save" button. Below the dialog, there is a "Back to Regional Page" link.

**Figure 72- Selecting the VistA Site for NUMI data**

Select the VistA site for which the selected scheduler will retrieve NUMI data then press the Save button. Use the Edit link to select a different site for which the scheduler should retrieve NUMI data.

## 3 Application structure

### 3.1 Application Components

BMS application consists of the following components:

- BMS Databases (BMS Database, BMS Authz, BMS EIS, BMS EVS, BMS\_DS, BMS\_DW, BMS InstanceStore and BMS History)
- BMS Services (BMS Service and Win ServiceHost)
  - BMS Service
  - Win Service Host (EIS Service, EVS Service, PAP service, PDP service, RS service and STS service)
- BMS Web Site
- WMI UserGroup

### 3.2 Application Directory Structure

BMS application directory is structured as is presented below:


```
+---Consoles
| +---PolicyManager
+---Databases
| \---SQLData
| | \---Job Logs
| | \---WMI_UserGroup
+---Services
| +---BMS
| | \---DBRepository
| | \---LinqToSql
| | \---LocalReportWhiteboard
| | \---Scripts
| +---EIS
| | \---DBRepository
| +---EV
| | \---DBRepository
| +---PAP
| | \---DBRepository
| +---PDP
| +---RS
| +---Shared
```

```
| \---STS
+---WebSite
| +---bin
| | \--- LocalReportWhiteboard
| | \--- Scripts
| +---Content
| | \---images
| | +---themes
| | | +---base
| | | | \---images
| +---Reporting
| +---ReportsLocal
| +---Scripts
| \---Views
```

### 3.3 Database Architecture

The BMS Database implementation is comprised of three main parts:

- BMS Database
  - BMS\_EVS (Enterprise Vocabulary database)
  - BMS\_EIS (Entity Identification Services database)
  - BMS\_AUTHZ (Authorization database)
  - BMS (Bed Management database).
  - BMS\_History (BMS Transactional History)
  - BMS\_InstanceStore (BMS Instances)
- BMS\_DS – Data Loaded by an ETL job
- BMS\_DW - Data Loaded by an ETL job

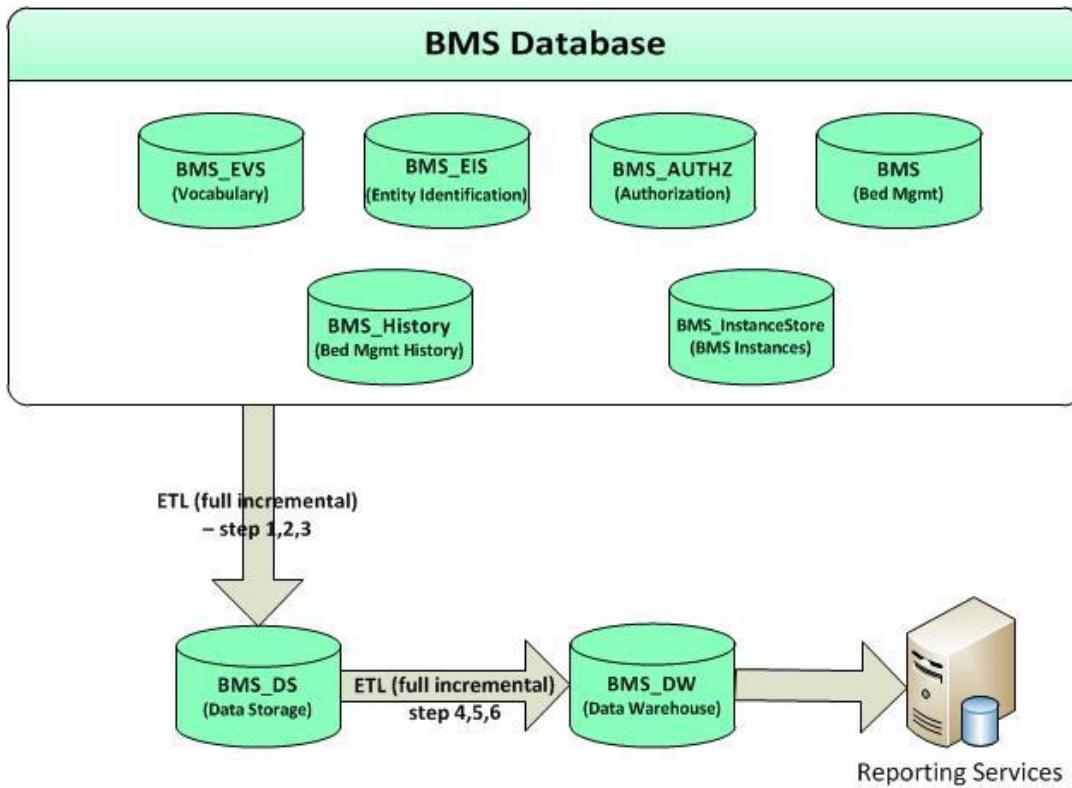

**Figure 73-Database Architecture**

### 3.4 Component Files

A list with files for each BMS component is presented below:

**Table 22-BMS Database Files**

Relative Path	File	Description
Databases\SQLData Databases\SQLData2 Databases\SQLLogs	BMS_Data.mdf	Database files (BMS database, BMS Authz, BMS EIS, BMS EVS....)
	BMS_Data_F.ndf	
	BMS_Log.ldf	
	BMS_AUTHZ_Data.mdf	
	BMS_AUTHZ_Log.ldf	
	BMS_DS_Data.mdf	
	BMS_DS_Data_F.ndf	
	BMS_DS_Log.ldf	
	BMS_DW_Data.mdf	
	BMS_DW_Log.ldf	
	BMS_EIS_Data.mdf	

Relative Path	File	Description
	BMS_EIS_Data_F.ndf BMS_EIS_Log.ldf BMS_EVS_Data.mdf BMS_EVS_Data.ndf BMS_EVS_Log.ldf BMS_HISTORY_Data.mdf BMS_HISTORY_Data_F.ndf BMS_HISTORY_Log.ldf BMS_InstanceStore_Data.mdf BMS_InstanceStore_Log.ldf	
Databases\SQLData\Job_Logs	BMS_Report_Log.txt BMS_Report_Log_Incremental.txt	BMS Report Full job file log and BMS Incremental job file log.
Databases\SQLData\WMI_UserGroup	AdapterRepository.dll Common.dll connectionConfiguration.config Connections.SingleDatabase.dll ContextWriter.dll General.MT.dll InfoWorld.Configuration.dll MiddleTier.dll MS.Common.dll	Binaries of WMI UserGroup application.
	MS.Configuration.dll MS.Connections.dll WMI_UserGroup.exe WMI_UserGroup.exe.config WMI_UserGroup.vhost.exe WMI_UserGroup.vhost.exe.config WMI_UserGroup.vhost.exe.manifest	
	Connections.xml	File used to set the connection to the database.

Relative Path	File	Description
Databases\SQLData\WMI_UserGroup\ DBRepository	InfoWorld.WMI_UserGroup.DTO.DTOUserGroupDomain.xml	XML mapping file which contain mapping definitions between ePractice datasets and SQL tables. The dataset is specified by setting the <MyDataSetInfo> tag. The table to interact with – specified through the <MyDataTable> tag – is defined by four commands – usually stored procedures – which represent the Create, Read, Update and Delete (CRUD) operations which can be performed on the table: select (Read), insert (Create), update (Update) and delete (Delete). Stored procedure parameters are passed from these datasets and mapped in the same XML file.

**Table 23-BMS Service Files**

Relative Path	File	Description
Services\BMS	AdapterRepository.dll	The binaries of the BMS Service.
	AuditTrailSender.dll	
	AuthenticationProxy.dll	
	AuthorizationSubscriber.dll	
	BMS.Contracts.dll	
	BMS.Facade.dll	
	BMS.Facade.Contracts.dll	
	BMS.Host.dll	
	BMS.MT.dll	
	BMS.MT.dll.config	
	BMS.Numi.dll	
	BMS.Schedulers.dll	
	BMS.Security.dll	
	BMS.ServiceHost.exe	
	BMS.ServiceHost.exe.config	
	BMS.ServiceImplementation.dll	
	BMS.ServicesWrapper.dll	
	BMS.UnitTesting.dll	
	BMS.UnitTesting.dll.config	
	BMS.Utils.dll	
	BMS.VistaIntegration.dll	

Relative Path	File	Description
	BMS.VistaIntegration.Cache.dll BMS.VistaIntegration.Data.dll BMS.VistaIntegration.HL7.dll BMS.VistaIntegration.Mdws.dll BMS.VistaIntegration.UnitTesting.dll BMS.VistaIntegration_Accessor.dll BMS.VistaWorker.dll BMS.VistaWorker.Reader.dll BMS.VistaWorker2.Writer.dll BMS.Web.dll BMS.WhiteboardReport.dll BMS.Workflows.CustomActivities.dll BMS.Workflows.PropertyPromotionActivity.dll BMS.Workflows.WF.dll Castle.Core.dll Common.dll connectionConfiguration.config Connections.SingleDatabase.dll ContextWriter.dll DataUtil.dll FakeItEasy.dll General.MT.dll	
	HL7DataTypes.dll IContracts.dll ICTSEdit.dll Infoworld.Configuration.dll InterSystems.Data.CacheClient.dll log4net.dll Mdws2ORM.dll Microsoft.Web.Mvc.dll MiddleTier.dll MS.Common.dll	

Relative Path	File	Description
	MS.Configuration.dll MS.Connections.dll PAPProxy.dll RS.Contracts.dll Saml20.dll SecurityTokenCache.dll trace.log Tracing.dll VistASites.xml Xacml2.dll XacmlCore.dll	
Services\BMS\DBRepository	BMS.MT.Admission.xml BMS.MT.AdmissionInfo.xml BMS.MT.AdmissionLevelOfCare.xml BMS.MT.BedCleanInfo.xml BMS.MT.BedCleaning.xml BMS.MT.BedCleanMobileInfo.xml BMS.MT.BedDNDAndOOSFromVista.xml BMS.MT.BedOccupancyCount.xml BMS.MT.BedOccupancyInfo.xml BMS.MT.BedStaff.xml	XML mapping files which contains mapping definitions between ePractice datasets and SQL tables. The dataset is specified by setting the <MyDataSetInfo> tag. The table to interact with – specified through the <MyDataTable> tag – is defined by four commands – usually stored procedures – which represent the CRUD operations which can be performed on the table: select (Read), insert (Create), update (Update) and delete (Delete). Stored procedure parameters are passed from these datasets and mapped in the same XML file. Connections.xml file is used to set the connection string to BMS database.
	BMS.MT.BedStaffHistory.xml	
	BMS.MT.BedSwitch.xml	
	BMS.MT.BedUnavailable.xml	
	BMS.MT.BedUnavailableHistory.xml	
	BMS.MT.BedUnavailableInfo.xml	
	BMS.MT.CancelableOrderInfo.xml	
	BMS.MT.Configuration.xml	
	BMS.MT.Discharge.xml	
	BMS.MT.Diversion.xml	
	BMS.MT.EISOrganization.xml	
	BMS.MT.EmsStaff.xml	

Relative Path	File	Description
	BMS.MT.EvacuationPatients.xml BMS.MT.IconAssociation.xml BMS.MT.IconAssociationInfo.xml BMS.MT.IconDetail.xml BMS.MT.IconInfo.xml BMS.MT.IconOrder.xml BMS.MT.JobAudit.xml BMS.MT.JobAuditInfo.xml BMS.MT.LastActInfo.xml BMS.MT.LevelOfCare.xml BMS.MT.LoggedUser.xml BMS.MT.Movement.xml BMS.MT.NewEvent.xml BMS.MT.OccupiedBedInfo.xml BMS.MT.PatientIconAssociation.xml BMS.MT.PatientLocation.xml BMS.MT.PatientsWaitingCount.xml BMS.MT.PatientWaitingDateView.xml BMS.MT.PatientWaitingStandardView.xml BMS.MT.Transfer.xml	
	BMS.MT.TransferInfo.xml BMS.MT.VistaIntegrationLog.xml BMS.MT.VistaOperation.xml BMS.MT.WaitingListItem.xml BMS.MT.WaitingListReport.xml ConfigurationService.DataAccess.ConfigurationsBE.xml Connections.xml	
Services\BMS\LocalReport\WardWhiteboard	WardWhiteboard.rdlc	Ward whiteboard report file.
Services\BMS\Scripts	conditional-validation.js	JavaScript conditional validation file.

**Table 24-WIN Service Host Files**

Relative Path	File	Description
Services\EIS	BindingExtensions.dll DTOGenericService.dll DTOHL7Service.dll EISAuditUtil.dll EISAutomaticLink.dll EISCache.dll EISContracts.dll EISDataAccess.dll EISNotifications.dll EISServiceGenericImplementation.dll EISServiceHL7Implementation.dll EISServiceImplementation.dll EISServiceImplementation.dll.config ICSharpCode.SharpZipLib.dll	Binaries of the EIS Service.
Services\EIS\DBRepository	Connections.xml InfoWorld.EIS.DTOGenericService.DTOAutomaticLink.xml InfoWorld.EIS.DTOGenericService.DTODomain.xml InfoWorld.EIS.DTOGenericService.DTOEntity.xml	XML mapping files which contains mapping definitions between ePractice datasets and SQL tables. The dataset is specified by setting the <MyDataSetInfo> tag. The table to interact with – specified through the <MyDataTable> tag – is defined by four commands – usually stored procedures – which represent the CRUD operations which can be performed on the table: select
	InfoWorld.EIS.DTOGenericService.DTOEntityType.xml InfoWorld.EIS.DTOGenericService.DTOEntityTypeClassifier.xml InfoWorld.EIS.DTOGenericService.DTOEntityTypeTraitCoresp.xml InfoWorld.EIS.DTOGenericService.DTOTrait.xml InfoWorld.EIS.DTOGenericService.DTOTraitAssignment.xml InfoWorld.EIS.DTOGenericService.EntityManagement.DTOEntityManageLink.xml InfoWorld.EIS.DTOGenericService.EntityManagement.DTOEntityMerge.xml InfoWorld.EIS.DTOGenericService.EntityManagement.DTOEntitySetStatus.xml InfoWorld.EIS.DTOGenericService.LinkAlgorithmManagement.LinkAlgorithmTrait.xml	(Read), insert (Create), update (Update) and delete (Delete). Stored procedure parameters are passed from these datasets and mapped in the same XML file. Connections.xml file is used to set the connection string to BMS_EIS database.

Relative Path	File	Description
	InfoWorld.EIS.DTOGenericService.LinkAlgorithmManagement.LinkAlgorithmTraits.xml InfoWorld.EIS.DTOGenericService.LinkAlgorithmManagement.Match.xml InfoWorld.EIS.DTOGenericService.QueryFunctions.DTOConflictingEntities.xml InfoWorld.EIS.DTOGenericService.QueryFunctions.DTOFindEntity.xml InfoWorld.EIS.DTOGenericService.QueryFunctions.DTOGetAllInfoPar.xml InfoWorld.EIS.DTOGenericService.QueryFunctions.DTOGetAllInformationForAnEntity.xml InfoWorld.EIS.DTOGenericService.QueryFunctions.DTOGetSupportedDomains.xml InfoWorld.EIS.DTOGenericService.QueryFunctions.DTOLinkedEntities.xml InfoWorld.EIS.DTOHL7Service.Address.xml InfoWorld.EIS.DTOHL7Service.Container.xml InfoWorld.EIS.DTOHL7Service.ContainerFiltr.xml InfoWorld.EIS.DTOHL7Service.ContainerInfo.xml InfoWorld.EIS.DTOHL7Service.Device.xml InfoWorld.EIS.DTOHL7Service.DeviceFiltr.xml	
	InfoWorld.EIS.DTOHL7Service.DeviceInfo.xml InfoWorld.EIS.DTOHL7Service.ManufacturerMaterial.xml InfoWorld.EIS.DTOHL7Service.ManufacturerMaterialFiltr.xml InfoWorld.EIS.DTOHL7Service.ManufacturerMaterialInfo.xml InfoWorld.EIS.DTOHL7Service.Material.xml InfoWorld.EIS.DTOHL7Service.MaterialFiltr.xml InfoWorld.EIS.DTOHL7Service.MaterialInfo.xml InfoWorld.EIS.DTOHL7Service.NonPersonLivingSubject.xml InfoWorld.EIS.DTOHL7Service.NonPersonLivingSubjectFiltr.xml InfoWorld.EIS.DTOHL7Service.NonPersonLivingSubjectInfo.xml	

Relative Path	File	Description
	InfoWorld.EIS.DTOHL7Service.Organization.xml InfoWorld.EIS.DTOHL7Service.OrganizationFiltr.xml InfoWorld.EIS.DTOHL7Service.OrganizationInfo.xml InfoWorld.EIS.DTOHL7Service.Person.xml InfoWorld.EIS.DTOHL7Service.PersonFiltr.xml InfoWorld.EIS.DTOHL7Service.PersonInfo.xml InfoWorld.EIS.DTOHL7Service.Place.xml InfoWorld.EIS.DTOHL7Service.PlaceFiltr.xml InfoWorld.EIS.DTOHL7Service.PlaceInfo.xml InfoWorld.EIS.DTOHL7Service.Telcom.xml InfoWorld.WSEventing.DTO.CustomSubscriptions.xml InfoWorld.WSEventing.DTO.Endpoints.xml InfoWorld.WSEventing.DTO.FilterDialects.xml InfoWorld.WSEventing.DTO.Message.xml InfoWorld.WSEventing.DTO.MessageGet.xml	
	InfoWorld.WSEventing.DTO.MessageGet.DeliveryTo.xml InfoWorld.WSEventing.DTO.Subscriptions.xml	
	ActionManager.dll BindingExtensions.dll CodingSystems.DAL.dll Configuration.dll connectionConfiguration.config Connections.Common.dll CTSEdit.dll CTSEdit.Utils.dll CTSEditBulk.dll CTSEport.dll	

Relative Path	File	Description
Services\EVS	CTSIImport.dll CTSIImportProxy.dll CTSService.Utils.dll DTOCodeMappingEdit.dll DTOMapping.dll DTOMessageBrowser.dll DTOMessageEdit.dll DTOMessageRuntime.dll DTOVocabularyEdit.dll DTOVocabularyEdit.dll.config EVSWrapper.dll EVSWrapper.dll.config Factory.dll HL7DataTypes.XmlSerializers.dll IContracts.dll ICSharpCode.SharpZipLib.dll ICTSEdit.dll ICTSEditBulk.dll ICTSExport.dll	Binaries of EVS service.
	ICTSIImport.dll IEventing.dll MappingImpl.dll Message.dll MessageImpl.dll MessageImpl.dll.config MS.Caching.dll Notify.dll SecureChannel.dll Security.Null.dll securityConfiguration.config VocabularyBrowser.DTO.dll VocabularyImpl.dll	

Relative Path	File	Description
	VocabularyRuntime.DTO.dll XamlContracts.dll XamlDataContracts.dll XamlImpl.dll	
Services\EVS\DBRepository	Connections.xml InfoWorld.EVS.CTSEdit.DTO.Association.xml InfoWorld.EVS.CTSEdit.DTO.CodingSystem.xml InfoWorld.EVS.CTSEdit.DTO.Concept.xml InfoWorld.EVS.CTSEdit.DTO.ConceptAssociationsToCMultiAttrib.xml InfoWorld.EVS.CTSEdit.DTO.ConceptProperty.xml InfoWorld.EVS.CTSEdit.DTO.DSMap.xml InfoWorld.EVS.CTSEdit.DTO.DSMapEntry.xml InfoWorld.EVS.CTSEdit.DTO.DTOReExpandValueSet.xml InfoWorld.EVS.CTSEdit.DTO.DTOValueSet.xml InfoWorld.EVS.CTSEdit.DTO.DTOVocabularyDomain.xml InfoWorld.EVS.CTSEdit.DTO.Relation.xml	XML mapping files which contains mapping definitions between ePractice datasets and SQL tables. The dataset is specified by setting the <MyDataSetInfo> tag. The table to interact with – specified through the <MyDataTable> tag – is defined by four commands – usually stored procedures – which represent the CRUD operations which can be performed on the table: select (Read), insert (Create), update (Update) and delete (Delete). Stored procedure parameters are passed from these datasets and mapped in the same XML file. Connections.xml file is used to set the connection string to BMS_EVS database.
	InfoWorld.EVS.CTSEdit.DTO.ValueSets.xml InfoWorld.EVS.CTSMAPI.DTO.CodeSystemInfo.xml InfoWorld.EVS.CTSMAPI.DTO.DomainValueSetFiltr.xml InfoWorld.EVS.CTSMAPI.DTO.DSConceptsByCode.xml InfoWorld.EVS.CTSMAPI.DTO.DSConceptsByCodeProperties.xml InfoWorld.EVS.CTSMAPI.DTO.DSConceptsByDesignation.xml InfoWorld.EVS.CTSMAPI.DTO.DSConceptsByDesignationProperties.xml InfoWorld.EVS.CTSMAPI.DTO.DSFullValueSetDescription.xml InfoWorld.EVS.CTSMAPI.DTO.DSValueSetContextExpansion.xml InfoWorld.EVS.CTSMAPI.DTO.DSValueSetExpansion.xml	

Relative Path	File	Description
	InfoWorld.EVS.CTSMAPI.DTO.DSValueSetExpansionProperties.xml InfoWorld.EVS.CTSMAPI.DTO.DSValueSetExpansionReverse.xml InfoWorld.EVS.CTSMAPI.DTO.DSVocabularyDomainDescription.xml InfoWorld.EVS.CTSMAPI.DTO.GetFillInDetailsCD.xml InfoWorld.EVS.CTSMAPI.DTO.IsCodeInValueSet.xml InfoWorld.EVS.CTSMAPI.DTO.ValidateCode.xml InfoWorld.EVS.CTSMAPI.DTO.ValueSetCodeReference.xml InfoWorld.EVS.CTSMAPI.DTO.ValueSetFilter.xml InfoWorld.EVS.CTSMAPI.DTO.VocabularyDomainFiltr.xml InfoWorld.EVS.CTSMapping.DTO.DSMapConceptCode.xml InfoWorld.EVS.CTSMapping.DTO.DSMapEntry.xml InfoWorld.EVS.CTSMapping.DTO.DSSupportedMapsFiltr.xml InfoWorld.EVS.CTSVAPI.DTO.CodeSystem.xml InfoWorld.EVS.CTSVAPI.DTO.CodeSystemFiltr.xml	
	InfoWorld.EVS.CTSVAPI.DTO.CodingSchemeFiltr.xml InfoWorld.EVS.CTSVAPI.DTO.ConceptCodeValid.xml InfoWorld.EVS.CTSVAPI.DTO.ConceptDescription.xml InfoWorld.EVS.CTSVAPI.DTO.ConceptExpansion.xml InfoWorld.EVS.CTSVAPI.DTO.ConceptProperties.xml InfoWorld.EVS.CTSVAPI.DTO.ConceptsByDesignation.xml InfoWorld.EVS.CTSVAPI.DTO.ConceptsByProperty.xml InfoWorld.EVS.CTSVAPI.DTO.Designation.xml InfoWorld.EVS.CTSVAPI.DTO.RelatedConcepts.xml InfoWorld.EVS.DTOEditBulk.ConceptBulk.xml InfoWorld.EVS.DTOEditBulk.ConceptPropertyBulk.xml	

<b>Relative Path</b>	<b>File</b>	<b>Description</b>
	InfoWorld.EVS.DTOEditBulk.RelationBulk.xml InfoWorld.WSEventing.DTO.CustomSubscriptions.xml InfoWorld.WSEventing.DTO.Endpoints.xml InfoWorld.WSEventing.DTO.FilterDialects.xml InfoWorld.WSEventing.DTO.Message.xml InfoWorld.WSEventing.DTO.MessageGet.xml InfoWorld.WSEventing.DTO.MessageGetDeliveryTo.xml InfoWorld.WSEventing.DTO.Subscriptions.xml XamlDataContracts.DSXamlReverse.xml XamlDataContracts.RootXaml.xml XamlDataContracts.XAMLFiltr.xml	
Services\PAP	ActionManager.dll AuthorizationProxy.dll Configuration.dll connectionConfiguration.config	Binaries of PAP service.

<b>Relative Path</b>	<b>File</b>	<b>Description</b>
	Connections.Common.dll Microsoft.ApplicationBlocks.Data.dll Microsoft.ApplicationBlocks.ExceptionManagement.dll Microsoft.ApplicationBlocks.ExceptionManagement.Interfaces.dll Microsoft.Practices.EnterpriseLibrary.Common.dll Microsoft.Practices.EnterpriseLibrary.ExceptionHandling.dll Microsoft.Practices.EnterpriseLibrary.ExceptionHandling.Logging.dll Microsoft.Practices.EnterpriseLibrary.Logging.dll Microsoft.Practices.ObjectBuilder.dll MS.Caching.dll ObjectPickerHelper2.dll	

Relative Path	File	Description
	PAPPProxy.dll PDPServiceAuthorizationManager.dll PolicyAdministrationPoint.dll PolicyAdministrationPoint.dll.config SecureChannel.dll Security.Null.dll	
Services\PAP\DBRepository	Connections.xml	XML mapping files which contains mapping definitions between ePractice datasets and SQL tables. The dataset is specified by setting the <MyDataSetInfo> tag. The table to interact with – specified through the <MyDataTable> tag – is defined by four commands – usually stored procedures – which represent the CRUD operations which can be performed on the table: select (Read), insert (Create), update (Update) and delete (Delete). Stored procedure parameters are passed from these datasets and mapped in the same XML file. Connections.xml file is used to set the connection string to BMS_AURHZ database.
	InfoWorld.DE.DataAccess.LabSet.xml	
	InfoWorld.DE.DataAccess.LabSetId.xml	
	InfoWorld.DE.DataAccess.SentStatus.xml	
	InfoWorld.WSEventing.DTO.CustomSubscriptions.xml	
	InfoWorld.WSEventing.DTO.Endpoints.xml	
	InfoWorld.WSEventing.DTO.FilterDialects.xml	
	InfoWorld.WSEventing.DTO.Message.xml	
	InfoWorld.WSEventing.DTO.MessageGet.xml	
	InfoWorld.WSEventing.DTO.MessageGetDeliveryTo.xml	
	InfoWorld.WSEventing.DTO.Subscriptions.xml	
Services\PDP	PolicyDecisionPoint.dll	Binaries of PDP service.
	PolicyDecisionPoint.dll.config	
Services\RS	AuthorizationProxy.dll	Binaries of RS service.
	RS.Contracts.dll	
	RS.Proxy.dll	
	RS.ServiceImplementation.dll	
	RS.ServiceImplementation.dll.config	
	7zip.dll AdapterRepository.dll AuditTrailSender.dll AuthorizationSubscriber.dll BindingExtensions.dll Common.dll	

<b>Relative Path</b>	<b>File</b>	<b>Description</b>
Services\Shared	CommonResources.dll Connections.SingleDatabase.dll ContextWriter.dll DataUtil.dll General.MT.dll HL7CDA.dll HL7CMET.dll HL7DataTypes.dll ICSharpCode.SharpZipLib.dll Infoworld.Configuration.dll log4net.dll MiddleTier.dll MS.Common.dll MS.Configuration.dll MS.Connections.dll MS.Security.dll Saml20.dll SecurityTokenCache.dll	Shared binaries by BMS Service and Win Service.

<b>Relative Path</b>	<b>File</b>	<b>Description</b>
	Tracing.dll WSEventing.dll WSEventing.DataAccess.dll WSEventing.DTO.dll Xacml2.dll XacmlCore.dll	
Services\STS	SecureTokenService.dll SecureTokenService.dll.config	Binaries of STS service.
Services	WinServiceHost.exe WinServiceHost.exe.config BMS-Services.log	WinServiceHost files.

**Table 25-BMS Website Files**

Relative Path	File	Description
WebSite	CacheService.svc	The binaries of the BMS Web Site, web site configuration file.
	Global.asax	
	packages.config	
	Web.config	
	WebTrace.log	
	additional_login_msg.txt	Dynamic text for main login page
WebSite\bin	AntiXSSLibrary.dll	Web site's binaries.
	AuditTrailSender.dll	
	AuthenticationProxy.dll	
	BMS.Contracts.dll	
	BMS.Facade.Contracts.dll	
	BMS.Facade.dll	
	BMS.PAPContracts.dll	
	BMS.Security.dll	
	BMS.ServicesWrapper.dll	
	BMS.Utils.dll	
	BMS.Web.dll	
	EISContracts.dll	
	HL7DataTypes.dll	
	HtmlAgilityPack.dll	
	HtmlSanitizationLibrary.dll	
	IContracts.dll	
	ICTSEdit.dll	
	Infoworld.Configuration.dll	
	log4net.dll	
	log4netAsync.dll	
	Microsoft.ReportViewer.Common.dll	
	Microsoft.ReportViewer.DataVisualization.dll	
	Microsoft.ReportViewer.ProcessingObjectModel.dll	
	Microsoft.ReportViewer.WebForms.dll	
	Microsoft.Web.Infrastructure.dll	
	Microsoft.Web.Mvc.dll	
	RS.Contracts.dll	

<b>Relative Path</b>	<b>File</b>	<b>Description</b>
	Saml20.dll	
	SecurityTokenCache.dll	
	System.Web.Helpers.dll	
	System.Web.Mvc.dll	
	System.Web.Razor.dll	
	System.Web.WebPages.Deployment.dll	
	System.Web.WebPages.dll	
	System.Web.WebPages.Razor.dll	
	Tracing.dll	
	Xacml2.dll	
	XacmlCore.dll	
WebSite\bin\LocalReportWhiteboard	WardWhitebord.rdlc	Ward Whiteboard report file.
WebSite\bin\Scripts	Conditional-validation.js	File used by the site for conditional validation.
WebSite\Content	bundleCss.chirp.config	Images, themes and styles.
	Controls.css	
	LayoutCss.min.css	
	LayoutVistaIntegrationCss.min.css	
	Reports.min.css	
	Site.css	
WebSite\Content\images	add_tab_24.png	Images used by site.
	arrow_down.png	
	arrow_up.png	
	BMSLogoV6.jpg	
	check_inv.png	
	edit_staff_cancel.png	
	edit_staff_save.png	
	FavIcon.ico	
	Info.png	
	Ladybug.png	
	login_logo.png	
	logo.png	
	order_down.png	
	order_up.png	
	sort_down.png	
	sort_up.png	
WebSite\Content\themes\base	jquery.ui.accordion.css	jQuery controls style-sheets files.
	jquery.ui.all.css	
	jquery.ui.autocomplete.css	
	jquery.ui.base.css	

<b>Relative Path</b>	<b>File</b>	<b>Description</b>
	jquery.ui.button.css	
	jquery.ui.core.css	
	jquery.ui.datepicker.css	
	jquery.ui.dialog.css	
	jquery.ui.progressbar.css	
	jquery.ui.resizable.css	
	jquery.ui.selectable.css	
	jquery.ui.slider.css	
	jquery.ui.tabs.css	
	jquery.ui.theme.css	
WebSite\Content\themes\base\images	ui-bg_flat_0_aaaaaa_40x100.png ui-bg_flat_75_ffffff_40x100.png ui-bg_glass_55_fbf9ee_1x400.png ui-bg_glass_65_ffffff_1x400.png ui-bg_glass_75_dadada_1x400.png ui-bg_glass_75_e6e6e6_1x400.png ui-bg_glass_95_fef1ec_1x400.png ui-bg_highlight-soft_75_cccccc_1x100.png ui-icons_222222_256x240.png ui-icons_2e83ff_256x240.png ui-icons_454545_256x240.png ui-icons_888888_256x240.png ui-icons_cd0a0a_256x240.png	Images
WebSite\Reporting	EvacuationPatientReportViewer.aspx LocalReportViewer.aspx ReportError.aspx ReportViewer.aspx	Report Viewer pages.
WebSite\ ReportsLocal	BedStatusReport.rdlc	Bed Status Report file.
WebSite\Scripts	antiForgeryToken.js bundleScripts.chirp.config conditional-validation.js element-change.js hoverIntent.js jquery.autosize.js jquery.base64.js jquery.base64.min.js jquery.jscrollpane.min.js jquery.maskedinput-1.3.min.js jquery.mousewheel.js jquery.tablescroll.js jquery.tablescroll.min.js jquery.tablesorter.js jquery.tablesorter.min.js jquery.ui.autocomplete.js	JavaScript files.

Relative Path	File	Description
	jquery.ui.core.js	
	jquery.ui.position.js	
	jquery.ui.progressbar.js	
	jquery.ui.widget.js	
	jquery.unobtrusive-ajax.js	
	jquery.unobtrusive-ajax.min.js	
	jquery.validate.js	
	jquery.validate.min.js	
	jquery.validate.unobtrusive.js	
	jquery.validate.unobtrusive.min.js	
	jquery.validate-vsdoc.js	
	jquery-1.5.1.js	
	jquery-1.5.1.min.js	
	jquery-1.5.1-vsdoc.js	
	jquery-1.7.1.js	
	jquery-1.7.1.min.js	
	jquery-ui-1.8.11.js	
	jquery-ui-1.8.11.min.js	
	jquery-ui-1.8.18.custom.js	
	json2.js	
	LayoutAdminAutoCompleteAndDatePicker.js	
	LayoutAdminScripts.min.js	
	LayoutAutoCompleteAndDatePicker.js	
	LayoutScripts.min.js	
	LayoutVistaIntegrationDatePicker.js	
	LayoutVistaIntegrationScripts.min.js	
	MicrosoftAjax.debug.js	
	MicrosoftAjax.js	
	MicrosoftMvcAjax.debug.js	
	MicrosoftMvcAjax.js	
	MicrosoftMvcValidation.debug.js	
	MicrosoftMvcValidation.js	
	modernizr-1.7.js	
	modernizr-1.7.min.js	
	Reports.min.js	
	superfish.js	
	supersubs.js	
	whiteboard-script.js	
	whiteboard-script.min.js	
WebSite\Views	_ViewStart.cshtml	User Interface views.
	Web.config	
WebSite\Views\Account	LogOff.cshtml	Login/Logout user interface views.
	LogOn.cshtml	
WebSite\Views\Admin	AddEditUser.cshtml	Admin section user interface views.
	AddUserOperations.cshtml	

<b>Relative Path</b>	<b>File</b>	<b>Description</b>
	CacheConfirmation.cshtml	
	FacilityEdit.cshtml	
	FacilityEditSaved.cshtml	
	Index.cshtml	
	RefreshUsersConfirmation.cshtml	
	RemoveUserOperations.cshtml	
	SelectUser.cshtml	
	SisterSiteAddEdit.cshtml	
	SisterSiteEditSaved.cshtml	
	UserEditHasSaved.cshtml	
	UserOperationsView.cshtml	
WebSite\Views\AdminSpecialtyAssociation	Delete.cshtml	Admin specialty association user interface views.
	Index.cshtml	
WebSite\Views\AdminUnavailableReason	AddConfirmation.cshtml	Admin unavailable reason user interface
	Delete.cshtml	
	DeleteConfirmation.cshtml	
	Edit.cshtml	
	EditConfirmation.cshtml	
	Index.cshtml	
	MissingUnavailableReasonText.cshtml	
	UnavailableReasonAlreadyExists.cshtml	
	UnavailableReasonList.cshtml	
WebSite\Views\AdminComments	Index.cshtml	
	NotifyChange.cshtml	
WebSite\Views\AdminWaitingArea	AddAction.cshtml	Admin waiting area user interface views.
	Delete.cshtml	
	DeleteAction.cshtml	
	Edit.cshtml	
	EditAction.cshtml	
	Index.cshtml	
WebSite\Views\AdminWhiteboardReport	Delete.cshtml	Admin whiteboard report user interface
	Edit.cshtml	
	Index.cshtml	
WebSite\Views\AdtOrderableItems	Confirmation.cshtml	ADT Orderable Items user interface views.
	Index.cshtml	
	OrderableItemsList.cshtml	
WebSite\Views\BackgroundProcessors	AddEditConfirmation.cshtml	Background Processors user interface views.
	DeleteConfirmation.cshtml	
	Index.cshtml	
WebSite\Views\BedBoard	Index.cshtml	VISN user interface views.
WebSite\Views\BedBoardModule	Index.cshtml	Bed Board Module user

<b>Relative Path</b>	<b>File</b>	<b>Description</b>
WebSite\Views\BedInformation	ClearAll.cshtml	interface view. Bed Information user interface views.
	Index.cshtml	
	NotifyChange.cshtml	
WebSite\Views\BedStatusReport	Index.cshtml	Patients Pending Placement Status report user interface view.
WebSite\Views\ContingencySettings	Confirmation.cshtml	Contingency settings user interface views.
	Index.cshtml	
WebSite\Views\DischargeClinic	Index.cshtml	Discharge clinic user interface views.
	MessageConfirmation.cshtml	
WebSite\Views\EmsBedStatusAdmin	Edit.cshtml	EMS bed status user interface views
	EMSBatchAssign.cshtml	
	Index.cshtml	
	SaveConfirmation.cshtml	
WebSite\Views\EMSMobile	EMSList.cshtml	EMS Mobile user interface views.
	Users.cshtml	
WebSite\Views\EMSMobileLogon	Index.cshtml	EMS Mobile Logon user interface view.
WebSite\Views\EmsNotification	AddEdit.cshtml	EMS Notification user interface views.
	AddEditAction.cshtml	
	Delete.cshtml	
	DeleteAction.cshtml	
	Index.cshtml	
WebSite\Views\EmsStaff	Delete.cshtml	EMS Staff user interface views.
	Edit.cshtml	
	Index.cshtml	
WebSite\Views\EventNotification	AddConfirmation.cshtml	Event Notification user interface views
	AddEdit.cshtml	
	Delete.cshtml	
	DeleteConfirmation.cshtml	
	EditConfirmation.cshtml	
	Index.cshtml	
WebSite\Views\Exception	Index.cshtml	Exception user interface views.
	WFException.cshtml	
WebSite\Views\FacilityDiversion	Add.cshtml	Facility Diversion user interface views.
	Confirmation.cshtml	
	Edit.cshtml	
	Index.cshtml	
WebSite\Views\FacilitySettings	Index.cshtml	Facility Settings user interface views.
	SaveConfirmation.cshtml	

<b>Relative Path</b>	<b>File</b>	<b>Description</b>
WebSite\Views\Home	AdmissionList.cshtml	Home user interface views.
	AdmissionSuccessRemove.cshtml	
	AdmissionSuccessUndoRemove.cshtml	
	ChangeIntegratedSiteError.cshtml	
	Edit.cshtml	
	FeeUtilizationAdmissionList.cshtml	
	Index.cshtml	
	PatientFlowAdmissionList.cshtml	
	PatientInHouseAdmissionList.cshtml	
	PatientInquiry.cshtml	
	RemoveAdmission.cshtml	
	StandardAdmissionList.cshtml	
	UndoRemoveAdmission.cshtml	
WebSite\Views\IconLegend	Index.cshtml	Icon Legend user interface view.
WebSite\Views\IconLibrary	Edit.cshtml	Icon Library user interface views.
	Index.cshtml	
	ResetConfirmation.cshtml	
	SaveConfirmation.cshtml	
WebSite\Views\Information	Index.cshtml	Information user interface view.
WebSite\Views\LogOff	Index.cshtml	LogOff user interface view.
WebSite\Views\MaintainMarquee	Index.cshtml	Maintain Marquee user interface view.
	Saved.cshtml	
WebSite\Views\NationalAndRegiona l	Index.cshtml	National user interface views.
	PatientListView.cshtml	
WebSite\Views\NewEvents	Index.cshtml	New events user interface view.
WebSite\Views\Numi	Delete.cshtml	NUMI user interface views.
	Edit.cshtml	
	Index.cshtml	
WebSite\Views\Patient	Admission.cshtml	Patient user interface views.
	Confirmation.cshtml	
	EvacuationData.cshtml	
	GenericWfFault.cshtml	
	PatientWaitingAdd.cshtml	
	Select.cshtml	
WebSite\Views\Reports	Index.cshtml	Patient user interface views.
WebSite\Views\Shared	_Layout.cshtml	Shared user interface

<b>Relative Path</b>	<b>File</b>	<b>Description</b>
		views.
	_LayoutAdminPages.cshtml	
	_VistaIntegrationLayout.cshtml	
	CustomWebViewPage.cs	
	Error.cshtml	
	Header.cshtml	
	HtmlHelpers.cs	
	RequiredIfHelpers.cs	
WebSite\Views\SiteList	Index.cshtml	Site list user interface view.
WebSite\Views\SiteOptions	EvacuationConfirmation.cshtml	Site options user interface views.
	Index.cshtml	
WebSite\Views\Transfer	AddEditResult.cshtml	
	AddTranfer.cshtml	
	EditTransfer.cshtml	
	FinalizeResult.cshtml	
	Index.cshtml	
WebSite\Views\Unauthorized	PermissionAuth.cshtml	Unauthorized user interface view.
WebSite\Views\UserConfiguration	Index.cshtml	User configuration views.
	SelectUser.cshtml	
	UserEditHasSaved.cshtml	
WebSite\Views\UnavailableReason	AddConfirmation.cshtml	Unavailable reason user interface views.
	Delete.cshtml	
	DeleteConfirmation.cshtml	
	Edit.cshtml	
	EditConfirmation.cshtml	
	Index.cshtml	
	MissingUnavailableReasonText.cshtml	
	UnavailableReasonAlreadyExists.cshtml	
	UnavailableReasonList.cshtml	
WebSite\Views\VistaIntegration	Audit.cshtml	VistA integration user interface views.
	AuditLogEntries.cshtml	
	Categories.cshtml	
	DeleteScheduler.cshtml	
	EditScheduler.cshtml	
	EditVistASite.cshtml	
	ErrorDetail.cshtml	
	Index.cshtml	
	Schedulers.cshtml	
	VistASites.cshtml	
WebSite\Views\WaitingArea	AddAction.cshtml	
	Delete.cshtml	
	DeleteAction.cshtml	

<b>Relative Path</b>	<b>File</b>	<b>Description</b>
	Edit.cshtml	
	EditAction.cshtml	
	Index.cshtml	
WebSite\Views\WardConfiguration	AddEditWardConfirmation.cshtml	Ward configuration user interface views.
	Delete.cshtml	
	DeleteConfirmation.cshtml	
	Index.cshtml	
	Wards.cshtml	
WebSite\Views\WardOccupancy	Index.cshtml	Ward occupancy user interface view.
WebSite\Views\WardWhiteboard	ClearAll.cshtml	Ward whiteboard user interface views.
	Edit.cshtml	
	Index.cshtml	
	NotifyChange.cshtml	
	WardWhiteBoard.cshtml	
	WhiteboardDataOne.cshtml	
	WhiteboardDataTwo.cshtml	
WebSite\Views\WardWhiteboardUrl	Index.cshtml	Ward whiteboard url user interface view.
WebSite\Views\WhiteboardStaff	Index.cshtml	Whiteboard staff user interface view.
WebSite\Views\ _ViewStart.cshtml	_ViewStart.cshtml	

**Table 26-Policy Manager Files**

Relative Path	File	Description
Consoles\PolicyManager	7zip.dll	Binaries of PolicyManager application
	AdapterRepository.dll	
	AuditTrailSender.dll	
	Infoworld.Configuration.dll	
	MS.Common.dll	
	MS.Configuration.dll	
	MS.Connections.dll	
	PAPPProxy.dll	
	PolicyEditor.dll	
	PolicyEditor.dll.config	
	PolicyManager.exe	
	PolicyManager.exe.config	
	ResourceSecurityProperties.dll	
	SecurityTokenCache.dll	
	WSEventing.dll	
	WSEventing.DataAccess.dll	
	WSEventing.DTO.dll	
Consoles\PolicyManager\ ro	PolicyEditor.resources.dll	Binaries used by Policy Manager.
	ResourceSecurityProperties.resources.dll	
Consoles\PolicyManager\ ro-RO	PolicyEditor.resources.dll	Binaries used by Policy Manager.
	ResourceSecurityProperties.resources.dll	

## 4 Archiving

All the sensitive data in the BMS solution is persisted in a collection of SQL Server Databases. Therefore the archiving process is implying the definition of maintenance plans that will regularly make backups of these databases, backups that can be restored if needed.

The maintenance plan can be defined as detailed in the following pictures:

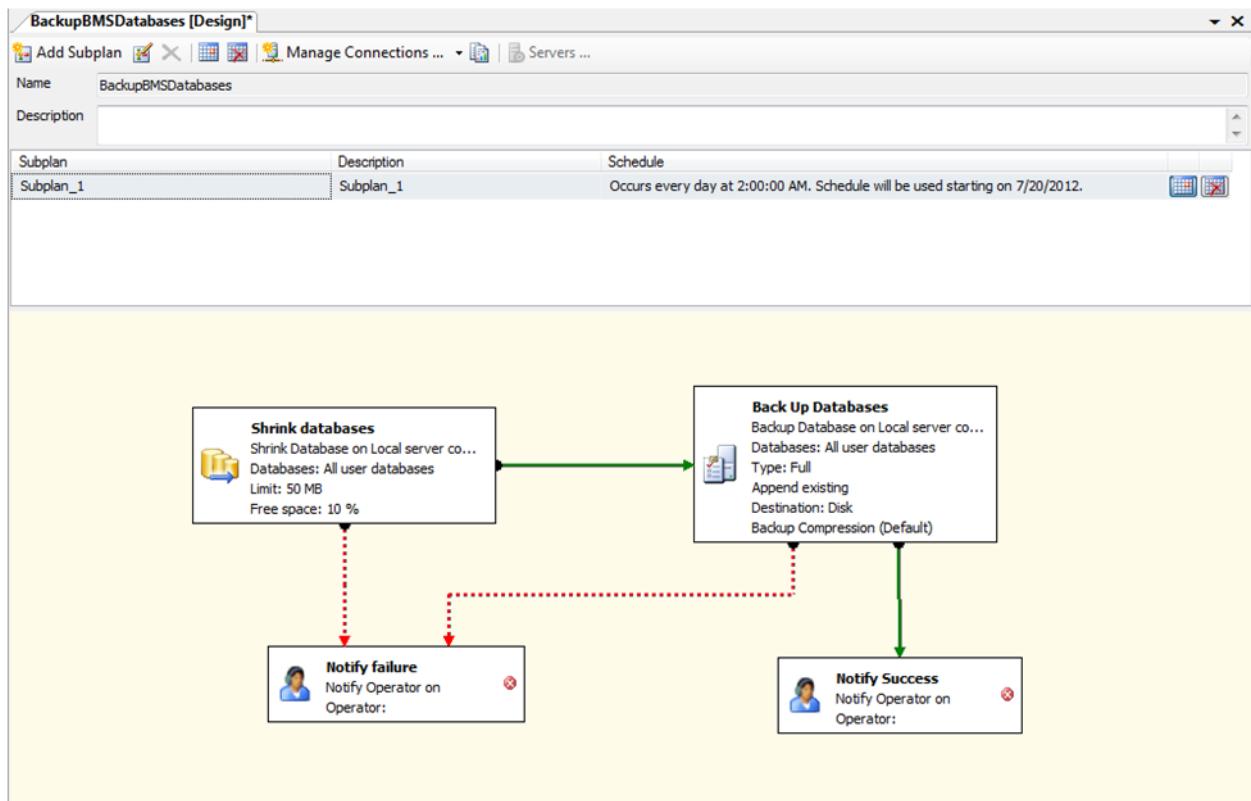


Figure 74-Backup Maintenance Plan

## 5 External Relationships

External relationships can be referenced from [External Interfaces](#) in the next section.

## 6 External Interfaces

VistA and NUMI are the external interfaces that are connected with the BMS system (see screenshot below):

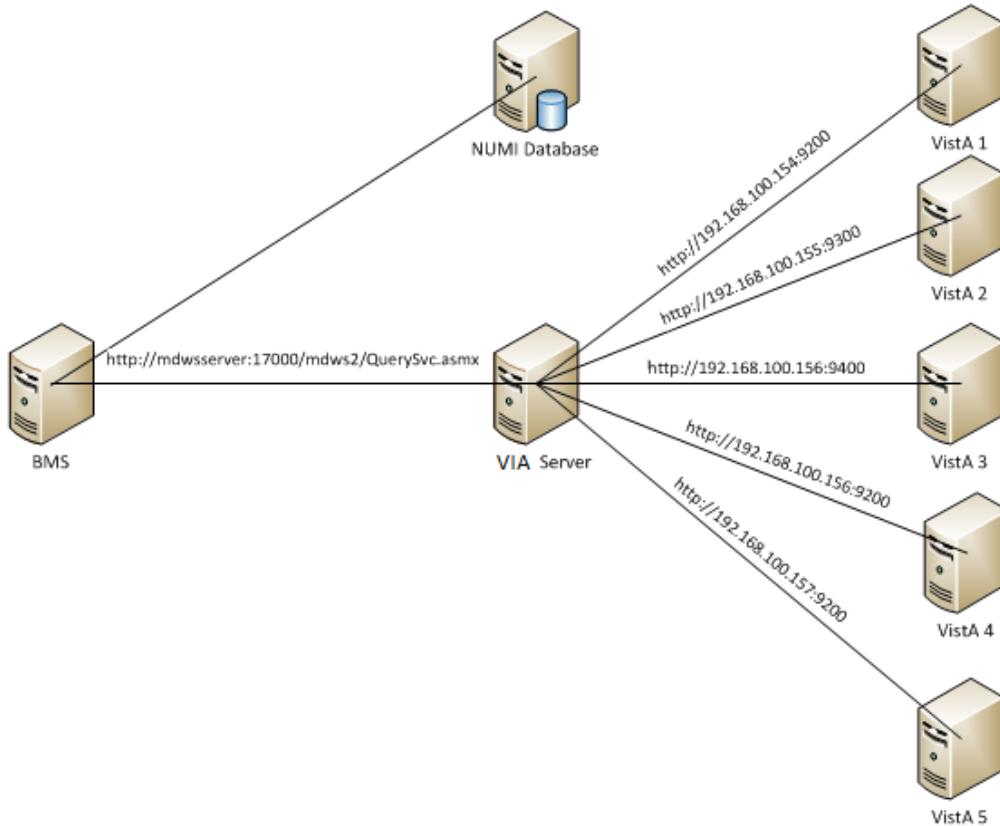


Figure 75-BMS External Interfaces

- All the VISTA deployments will be connected through VIA which has replaced MDWS. In order to connect to VIA, BMS service configuration file (BMS.ServiceHost.exe.config) should be changed as follow, see Table 4 – BMS ServiceHost Configuration Parameter section:

ViaEndpointUrl	value="https://vaww.bms.via.va.gov/via-webservices/services/BackgroundProcessService"	value="https://vaww.bms.via.va.gov/via-webservices/services/BackgroundProcessService"
ViaRequestingApp	value="BMSBatch"	value="BMSBatch"
ViaAppToken	value="BMSB_ID577"	value="BMSB_ID577"
ViaAppPassword	value="*****"	Value="*****"
MinimumFilemanDate	Value="01/01/1992"	Value="01/01/1992"

- NUMI - A connection string to NUMI database needs to be set in service configuration file (BMS.ServiceHost.exe.config), see **Table 4 - BMS ServiceHost Configuration Parameters** section:

*<ConnectionString>Data Source=numiserver;Initial Catalog=NUMI;Integrated Security=True;</ConnectionString>*

**NOTE:** All the configurations described above are using dummy servers and ports. Real deployment should use appropriate server, port and database connection strings.

## 7 Software Security

BMS Security is implemented at two levels:

- The first level of security consists in deciding which users have access to what pages (National/Regional, VISN, facility, EMS page).
- The second level of security refers to the read/write permissions (which are the pages a user can edit/update).

Both levels of security are implemented by means of the Policy Manager application described in the next section.

An additional level of security is provided by the domain restrictions: users can access only the BMS pages within the domain where they have been granted access rights.

The security services are based on well-established standards and practices such as:

- LDAP protocol;
- WS-Security specification;
- X509 certificates.

These services are in charge of providing for the following ‘functionalities’:


- CIA:
  - Confidentiality – encrypted message.
  - Integrity – message hasn’t been tampered.
  - Authentication – prove identity.
- Authorization – role based access.
- Accountability – audit trail.
- Policies – mutually agreed by involved parties.

From the client application perspective, the security services are in charge of:

- Authentication:
  - SAML assertions verified by the called service.

- Role based authorization:
  - o Roles stored in LDAP.
  - o Policies defined using XACML language.
- Record level authorization.
- Audit trail.

The audit services provide the means to address the issues of liability management, asset protection and quality of service. To facilitate a timely response to policy violations, security incidents or infrastructure and application failures, InFlow will support monitoring, logging, analysing, and reporting on every level of its architecture.

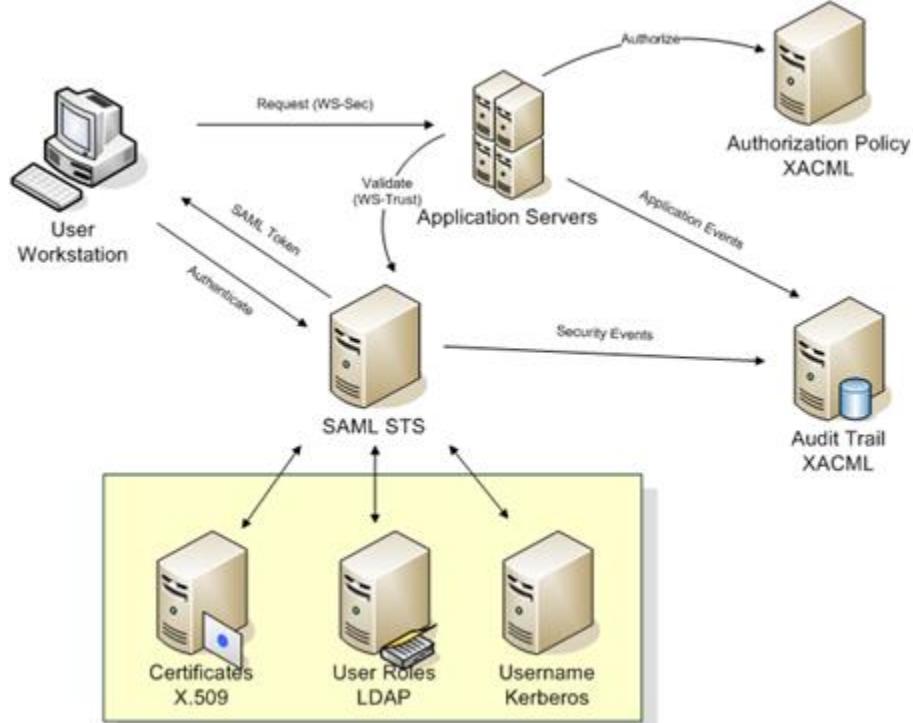


**Figure 76-Security Services Architecture**

The security services consist of the authentication part: STS – security token service and authorization part: PAP – policy administration point and PDP – policy decision point.

## 7.1 Policy Manager

From the Console folder of your BMS solution, select Policy Manager and then double-click the PolicyManager.exe file to display the following dialog window:

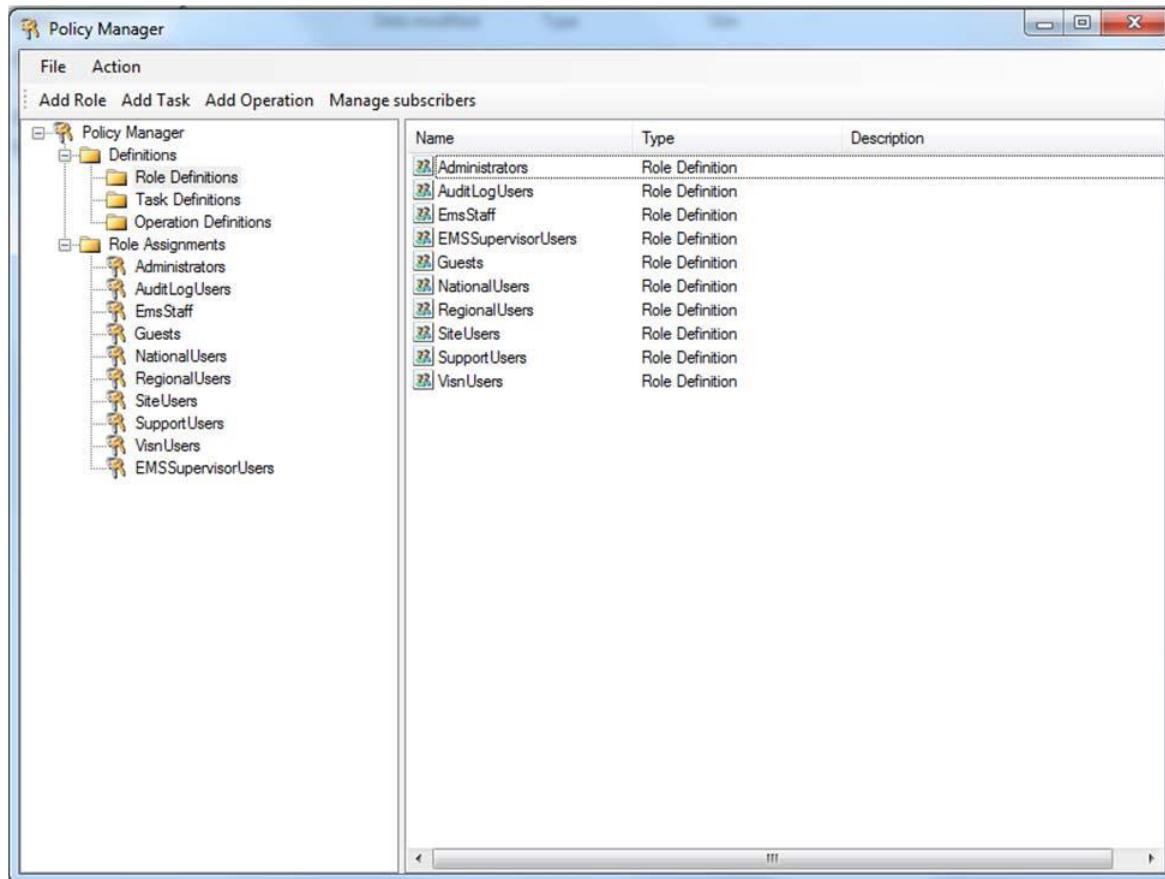

**Figure 77-Policy Manager Main Window**

The Definitions folder in the left hand panel contains the definitions of the roles, tasks and operations valid within the BMS application.


The Role Definitions folder contains the list of user roles defined within BMS.

The Task Definitions folder contains the list of tasks that can be performed within BMS and their corresponding definitions. A task usually requires the completion of several operations.

The Operation Definitions folder contains the list of operations that can be performed within BMS and their corresponding definitions.

## 7.2 Operation Definitions

To view the definition of an operation select Operation definitions from the left-hand panel of the main Policy Manager window and double-click the operation to display the following dialog window:

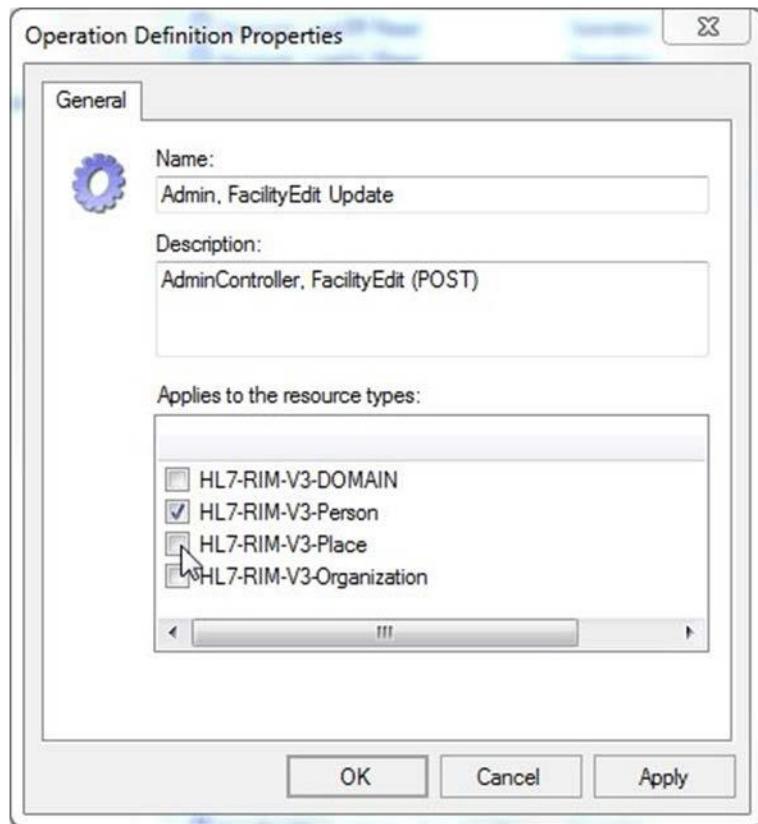

**Figure 78-Operation Definition**

A list with all the operations of BMS application is presented below:

**Table 27-BMS Operations**

<b>Operation Name</b>	<b>Operation Description</b>
Admin, AddEditUser Read	'Add/Edit BMS User' hyperlink from the Administration section's menu.
Admin, FacilityEdit Read	'Edit BMS Site' hyperlink from the Administration section's menu.
Admin, Index Read	'BMS Admin' hyperlink from the National And Regional Page.
<b>Operation Name</b>	<b>Operation Description</b>
Admin, SelectUser Read	'Select Existing NT User Name' button from the ADMINISTRATION SECTION - USERADD/EDIT page.
Admin, SisterSiteAddEdit Read	'Edit Sister Sites' hyperlink from the Administration section's menu.
Admin, AddUserOperations Read	'Add User' button from the ADMINISTRATION SECTION - FACILITY EDIT page (Edit BMS Site submenu).
Admin, RemoveUsers Read	'Remove Selected' button from the ADMINISTRATION SECTION - FACILITY EDIT page (Edit BMS Site submenu).
Admin, SearchUser Read	'Find' button from the 'Select user' page ('Select Existing NT User Name' button from the Administration Section menu, 'Add/Edit BMS User' submenu).
Admin, SearchUsers Read	'Find' button from the ADMINISTRATION SECTION - FACILITY EDIT page (Edit BMS Site submenu).

Admin, ClearCache Read	'Clear Cache' link from the Administration section's menu.
Admin, AddEditUser Update	'Submit' button from the ADMINISTRATION SECTION - USERADD/EDIT page.
Admin, FacilityEdit Update	'Submit' button from Administration section's menu 'Edit BMS Site' hyperlink (page ADMINISTRATION SECTION - FACILITY EDIT).
Admin, SisterSiteAddEdit Update	'Edit Sister Sites' hyperlink from the Administration section's menu, 'Submit' button.
Admin, AddUserOperations Update	'Add' button from Add users page (Add User button from the Facility page).
Admin, RemoveUserOperations Update	'Remove Selected' button from the ADMINISTRATION SECTION - FACILITY EDIT page (Edit BMS Site submenu).
AdminComments, Delete Read	'Delete' hyperlink from the Common Medical Terms page.
AdminComments, Edit Read	'Edit' hyperlink from the Common Medical Terms page.
AdminComments, Index Read	'Common Medical Terms' hyperlink from the Administration section's menu.
AdminComments, Index Update	'Save' button from the Common Medical Terms page.
AdminIcon, Delete Read	'Delete Icon' button on ADMINISTRATION SECTION - EDIT ICON page (Add/Edit Icon Submenu)
AdminIcon, Edit Read	'Edit' Link on ADMINISTRATION SECTION - ICON ADD/EDIT page (Add/Edit Icon Submenu)
AdminIcon, Index Read	'Add/Edit Icon' link on ADMINISTRATION SECTION
AdminIcon, Search Read	'Search' Link on ADMINISTRATION SECTION - ICON ADD/EDIT page (Add/Edit Icon Submenu)
AdminIcon, ViewIconReport Read	"Report" Link on ADMINISTRATION SECTION - ICON ADD/EDIT page (Add/Edit Icon Submenu)
AdminIcon, Delete Update	'Remove' button on ADMINISTRATION SECTION - DELETE ICON page (Add/Edit Icon Submenu)
AdminIcon, Edit Update	'Save' button on ADMINISTRATION SECTION - EDIT ICON page (Add/Edit Icon Submenu)
AdminIcon, Index Update	'Up/Down arrow' buttons on ADMINISTRATION SECTION - ICON ADD/EDIT page (Add/Edit Icon Submenu)
AdminSpecialtyAssociation, Delete Read	'Delete' Link on ADMINISTRATION SECTION - Treating Specialty/NUMA/HAvBED Edit page (Treating Specialty/NUMA/HAvBED Submenu)
AdminSpecialtyAssociation, Index Read	'Treating Specialty/NUMA/HAvBED' Link on ADMINISTRATION SECTION

Operation Name	Operation Description
AdminSpecialtyAssociation, Delete Update	'Delete' Button on ADMINISTRATION SECTION - Treating Specialty/NUMA/HAvBED Delete page (Treating Specialty/NUMA/HAvBED Submenu)
AdminSpecialtyAssociation, Index Update	'Save' Button on ADMINISTRATION SECTION - Treating Specialty/NUMA/HAvBED Edit page (Treating Specialty/NUMA/HAvBED Submenu)
AdminUnavailableReason, Delete Read	'Delete' link on ADMINISTRATION SECTION - National Unavailable Reason page (National Unavailable Reason Submenu)
AdminUnavailableReason, Edit Read	'Edit' link on ADMINISTRATION SECTION - National Unavailable Reason page (National Unavailable Reason Submenu)
AdminUnavailableReason, Index Read	'National Unavailable Reason' Link on ADMINISTRATION SECTION

AdminUnavailableReason, Delete Update	'Delete Record' button on ADMINISTRATION SECTION - National Unavailable Reason Delete page (National Unavailable Reason Submenu)
AdminUnavailableReason, Edit Update	'Submit' button on ADMINISTRATION SECTION - National Unavailable Reason Edit page (National Unavailable Reason Submenu)
AdminUnavailableReason, Index Update	'Add' button on ADMINISTRATION SECTION - National Unavailable Reason page (National Unavailable Reason Submenu)
AdminWaitingArea, Delete Read	'Delete' link on ADMINISTRATION SECTION - National Waiting Areas Parameter page (National Waiting Area Submenu)
AdminWaitingArea, Edit Read	'Edit' link on ADMINISTRATION SECTION - National Waiting Areas Parameter page (National Waiting Area Submenu)
AdminWaitingArea, Index Read	'National Waiting Area' Link on ADMINISTRATION SECTION
AdminWaitingArea, DeleteAction Update	'Delete Record' button on ADMINISTRATION SECTION - National Waiting Area Parameter Delete page (National Waiting Area Submenu)
AdminWaitingArea, Edit Update	'Submit' button on ADMINISTRATION SECTION - National Waiting Area Parameter Edit page (National Waiting Area Submenu)
AdminWaitingArea, Index Update	'Add' button on ADMINISTRATION SECTION - National Waiting Area Parameter page (National Waiting Area Submenu)
AdminWhiteboardReport, Delete Read	'Delete' link on ADMINISTRATION SECTION - Whiteboard Report page (Background Processor Submenu)
AdminWhiteboardReport, Edit Read	'Edit' link on ADMINISTRATION SECTION - Whiteboard Report page (Background Processor Submenu)
AdminWhiteboardReport, Index Read	'Whiteboard Report' tab on ADMINISTRATION SECTION - Background Processor page
AdminWhiteboardReport, Delete Update	'Delete Record' button on ADMINISTRATION SECTION - Whiteboard Report Delete page (Background Processor Submenu)
AdminWhiteboardReport, Edit Update	'Save' button on ADMINISTRATION SECTION - Whiteboard Report Edit page (Background Processor Submenu)
AdtOrderableItems, Index Read	Site Options, ADT Orderable Items Add/Delete hyperlink
AdtOrderableItems, Delete Update	'Delete' hyperlink from the list of orderable items.
AdtOrderableItems, Index Update	'Add' button from the Bed Board ADT Orderable Items Configuration.

Operation Name	Operation Description
BackgroundProcessors, Index Read	'Background Processors' hyperlink from Site Options page.
BackgroundProcessors, Index Update	'Save Scheduler' button from Background Processors page within Site Options.
AuditLogReport, Index Read	'View audit log' link on ADMINISTRATION SECTION
rep, Audit Log Report	Access the Audit Log Report.
BedBoard, ChangeFacility Read	Click on a facility link from the VISN Network Bed Boards list.
BedBoard, Index Read	'Return to VISN Network' hyperlink from the home page.
BedBoard, ShowFacilityBedSummaryReport Read	Click on a Facility Summary Report on VISN Network Bed Boards list

BedBoard, ShowVISNBedSummaryReport Read	Click on a VISN Summary Report on VISN Network Bed Boards list
BedBoardModule, Index Read	Site Options, Bed Board Module Enable/Disable link.
BedBoardModule, Index Update	'Submit' button from the Bed Board Module Activation and Configuration page.
BedInformation, Index Read	Ward Occupancy, click on a hyperlink from the BED column.
BedInformation, ClearAll Read	Click on button 'Clear ALL Comments For ALL Wards Associate To This Bed...'.
BedInformation, NotifyChange Read	'Submit' button from the Add/Edit Bed Unavailable Reason page.
BedInformation, Index Update	Click on buttons 'Submit' and/or 'Update Reason and Comments'.
ContingencySettings, Index Read	'Contingency Settings" link on Site Settings pages.
ContingencySettings, Index Update	'Save' button on Contingency Settings page on Site Settings pages.
DischargeClinic, Index Read	Site Options, 'Discharge Appt Clinics Add/Delete' hyperlink.
DischargeClinic, Delete Update	Site Options, 'Discharge Appt Clinics Add/Delete' hyperlink, 'Delete' button.
DischargeClinic, Index Update	Site Options, 'Discharge Appt Clinics Add/Delete' hyperlink, 'Add' button.
EmsBedStatusAdmin, EMS Supervisor Read/Update	'Assigned To' drop down on EMS Bed Edit page
EmsBedStatusAdmin, EMSBatchAssign Read	'Batch Assign' button on Ems Bed Status Admin page
EmsBedStatusAdmin, EMSBatchAssign Update	'Submit' button on EMS Bed Edit page on EMS Bed Status Admin page
EmsBedStatusAdmin, Edit Read	RoomBed column link click.
EmsBedStatusAdmin, Index Read	'Return to VISN Network' link from the home page, 'Return to Regional Page' link, 'Go To Facility Bed Cleaning Page (EMS Staff Only) button.
EmsBedStatusAdmin, SaveConfirmation Read	'Submit' button click in the Environmental Management Service Bed Status page.
EmsBedStatusAdmin, Edit Update	'Submit' button click in the Environmental Management Service Bed Status page.
EMSMobile, EMSList Read	Load Bed Clean Requests on EMS Mobile Pages
EMSMobile, Users Read	Click on a User button on EMS Mobile Pages
EMSMobile, EMSList Update	Click on a Bed Clean Request button on EMS Mobile Pages
EMSMobile, Users Update	Click on Submit button after entering a PIN on EMS Mobile Pages

Operation Name	Operation Description
EmsNotification, AddEdit Read	'Edit' link from the Current Locations table (EMS Bed Notification).
EmsNotification, AddEditAction Read	'Submit' button from the EMS Bed Notification Edit page.
EmsNotification, Delete Read	'Delete' link from the Current Locations table (EMS Bed Notification).
EmsNotification, Index Read	Site Options, 'EMS Notification Add/Edit' link
EmsNotification, DeleteAction Update	'Delete Record' button from the EMS Bed Status Notification Delete page.
EmsNotification, Index Update	'Submit' button from the EMS Bed Notification Edit page or Notifications Add page.
EmsStaff, Delete Read	'Delete' link on EMS Staff page on Site Options pages

EmsStaff, Edit Read	'Edit' link on EMS Staff page on Site Options pages
EmsStaff, Index Read	EMS Staff link on Site Options page
EmsStaff, Delete Update	'Delete Record' button on Ems Staff Delete page on Site Options pages
EmsStaff, Edit Update	'Submit' button on Ems Staff Edit page on Site Options pages
EventNotification, AddConfirmation Read	'Submit' button from the Event Notification Add page.
EventNotification, AddEdit Read	'Add' button or 'Edit' link from the Event Notifications page.
EventNotification, EditConfirmation Read	'Submit' button from the Event Notifications Edit page.
EventNotification, Index Read	Site Options, 'Event Notification Add/Edit' hyperlink.
EventNotification, Index Update	'Submit' button from the Event Notification Add page.
Exception, Index Read	Appears when an exception occurs.
FacilityDiversion, Add Read	'Add' button from the Facility Diversion page.
FacilityDiversion, AddConfirmation Read	'Add' button from the Add New Diversion Status page.
FacilityDiversion, Edit Read	'Edit' link from the Facility Diversion page.
FacilityDiversion, EditConfirmation Read	'Save' button from the Diversion Status edit page.
FacilityDiversion, FilterDiversions Read	'Current Diversions' or 'All Diversions' button from the main Facility Diversions page.
FacilityDiversion, Index Read	'Facility Diversion' hyperlink from the home page.
FacilityDiversion, Index Update	'Add' button or 'Edit' link from the Facility Diversion page.
FacilitySettings, Index Read	Site Options, Facility Settings link
FacilitySettings, Index Update	Site Options, Facility Settings link, Submit button
Home, Index Read	Home page.
Home, Index2 Read	Current, Past 30-Days, Past 60-Days, Past 90-Days home page's buttons.
Home, PatientInquiry Read	Click on the patient link from the Patients Pending Placement list (Home page).
Home, RemoveAdmission Read	Remove link from the Patients Pending Placement list (Home page).
Home, UndoRemoveAdmission Read	Undo link from the Patients Pending Placement list (Home page).

Operation Name	Operation Description
Home, RemoveAdmissionPost Update	Remove link from the Patients Pending Placement list (Home page), Remove button from the confirmation page.
Home, UndoRemoveAdmissionPost Update	'Undo' button on Undo Remove Admission Page on Facility HomePage
IconLegend, Index Read	'Icon Legend' link from the bottom of the Home page or Site Options, BMS Icon Legend link.
IconLibrary, Edit Read	'Edit' Link on Site Options - Site Configurable Icons page.
IconLibrary, Index Read	Site Options, Site Configurable Icons link.
IconLibrary, ResetConfirmation Read	'Reset' button on Edit Site Configurable Icon page.
IconLibrary, Edit Update	'Save' button on Site Options - Site Configurable Icons page.

IconLibrary, Index Update	'Up/Down arrow' buttons on Site Options - Site Configurable Icons page.
IconLibrary, ResetConfirmation Update	'Reset' button on Reset Site Configurable Icon page.
Information, Index Read	'Information' link from the bottom of the Home page.
MaintainMarquee, Index Read	'Maintain Marquee Text' link from the Administration Section's menu.
MaintainMarquee, ChangeMarquee Update	'Submit' button from the ADMINISTRATION SECTION - MAINTAIN MARQUEE TEXT page.
NationalAndRegional, Index Read	Home page, Return to VISN Network link, Return to Regional Page link.
NewEvents, Index Read	Home page, New Events link.
Numi, Add Read	'Add' button on ADMINISTRATION SECTION - Background Processors page (Background Processors Submenu).
Numi, Delete Read	'Delete' Link on ADMINISTRATION SECTION - Background Processors page (Background Processors Submenu).
Numi, Edit Read	'Edit' Link on ADMINISTRATION SECTION - Background Processors page (Background Processors Submenu).
Numi, Index Read	'Numi' tab on ADMINISTRATION SECTION - Background Processors page (Background Processors Submenu).
Numi, Delete Update	'Delete Record' button on ADMINISTRATION SECTION - Background Processors Delete page (Background Processors Submenu).
Numi, Edit Update	'Save' button on ADMINISTRATION SECTION - Background Processors Add/Edit page (Background Processors Submenu).
http://tempuri.org/IAdministrativeFunctions/GetDomains http://tempuri.org/IAdministrativeFunctions/GetCurrentDomain http://tempuri.org/IAdministrativeFunctions/GetRoles http://tempuri.org/IAdministrativeFunctions/GetBulkPolicies http://tempuri.org/IAdministrativeFunctions/GrantPermission http://tempuri.org/IAdministrativeFunctions/RevokePermission	Functions used in the Administration Section, Add/Edit BMS User and Edit BMS Site submenus.

Operation Name	Operation Description
http://tempuri.org/IAdministrativeFunctions/GetRoleByName	
http://tempuri.org/IAdministrativeFunctions/GetPermissionsByResourceType	
http://tempuri.org/IAdministrativeFunctions/GetAllUsersAndDomain	
http://tempuri.org/IAdministrativeFunctions/GetAllUserRoles	
http://tempuri.org/IAdministrativeFunctions/AssignUser	
http://tempuri.org/IAdministrativeFunctions/DeassignUser	
http://tempuri.org/IAdministrativeFunctions/GetPolicy	
http://tempuri.org/IAdministrativeFunctions/ClearPermissionsForResource	

http://tempuri.org/IAdministrativeFunctions/AddActionEntityType
http://tempuri.org/IAdministrativeFunctions/AddOperation
http://tempuri.org/IAdministrativeFunctions/AddRole
http://tempuri.org/IAdministrativeFunctions/AddTask
http://tempuri.org/IAdministrativeFunctions/AssignOperations
http://tempuri.org/IAdministrativeFunctions/AssignRole
http://tempuri.org/IAdministrativeFunctions/ChangeUserPassword
http://tempuri.org/IAdministrativeFunctions/DeassignOperations
http://tempuri.org/IAdministrativeFunctions/DeassignRole
http://tempuri.org/IAdministrativeFunctions/DeleteActionEntityType
http://tempuri.org/IAdministrativeFunctions/DeleteOperation
http://tempuri.org/IAdministrativeFunctions/DeletePermissionForResourceAndOperation
http://tempuri.org/IAdministrativeFunctions/DeletePermissionsForResourcesAndOperations
http://tempuri.org/IAdministrativeFunctions/DeleteRole
http://tempuri.org/IAdministrativeFunctions/DeleteTask
http://tempuri.org/IAdministrativeFunctions/GetActionEntityTypes
http://tempuri.org/IAdministrativeFunctions/GetAvailableDomains
http://tempuri.org/IAdministrativeFunctions/GetCallerIsSuperUser
http://tempuri.org/IAdministrativeFunctions/GetConnectedRolesAndOperations
http://tempuri.org/IAdministrativeFunctions/GetEntityTypes
http://tempuri.org/IAdministrativeFunctions/GetOperationByName
http://tempuri.org/IAdministrativeFunctions/GetOperationByNameExcludingId

Operation Name	Operation Description
http://tempuri.org/IAdministrativeFunctions/GetOperations	
http://tempuri.org/IAdministrativeFunctions/GetRoleByNameExcludingId	
http://tempuri.org/IAdministrativeFunctions/GetRoleDefinition	
http://tempuri.org/IAdministrativeFunctions/GetRolesDefinitionIntersect	
http://tempuri.org/IAdministrativeFunctions/GetRoleUsers	
http://tempuri.org/IAdministrativeFunctions/GetSubscriptions	
http://tempuri.org/IAdministrativeFunctions/GetTaskByName	
http://tempuri.org/IAdministrativeFunctions/GetTaskByNameExcludingId	

http://tempuri.org/IAdministrativeFunctions/GetTaskDefinition	
http://tempuri.org/IAdministrativeFunctions/GetTasks	
http://tempuri.org/IAdministrativeFunctions/ GetUserBySid	
http://tempuri.org/IAdministrativeFunctions/ GetUserByName	
http://tempuri.org/IAdministrativeFunctions/ GetUserDefinedRoles	
http://tempuri.org/IAdministrativeFunctions/ GetUserGroupId	
http://tempuri.org/IAdministrativeFunctions/ GetUserRoles	
http://tempuri.org/IAdministrativeFunctions/ InsertPermissionForResourceAndOperation	
http://tempuri.org/IAdministrativeFunctions/ InsertPermissionsForResourcesAndOperations	
http://tempuri.org/IAdministrativeFunctions/ InsertResource	
http://tempuri.org/IAdministrativeFunctions/ IsChild	
http://tempuri.org/IAdministrativeFunctions/ RefreshCache	
http://tempuri.org/IAdministrativeFunctions/ SearchUsers	
http://tempuri.org/IAdministrativeFunctions/ SetCurrentDomain	
http://tempuri.org/IAdministrativeFunctions/ SyncronizeAllSubscribers	
http://tempuri.org/IAdministrativeFunctions/ UpdateOperation	
http://tempuri.org/IAdministrativeFunctions/ UpdateRole	
http://tempuri.org/IAdministrativeFunctions/ UpdateTask	
Patient, Admission Read	'Edit' link from the Home page, Patients Pending Placement list.
Patient, Select Read	'Add New Patient' link from the Home page, Patients Pending Placement section.
Patient, Admission Update	'Submit' button from ADD/EDIT Patients Pending Placement page.
Operation Name	Operation Description
rep, Active Admission Orders Report	Access the Active Admission Orders Report.
rep, Active Discharge Orders Report	Access the Active Discharge Orders Report.
rep, Active Transfer Orders Report	Access the Active Transfer Orders Report.
rep, Antic Discharge Orders Report	Access the Antic Discharge Orders Report.
rep, BED AVAILABILITY STATUS REPORT	Access the BED AVAILABILITY STATUS REPORT.
rep, Bed Specialty Report	Access the Bed Specialty Report.
rep, Bed Specialty Roster	Access the Bed Specialty Roster.
rep, Bed Summary Report	Access the Bed Summary Report.
rep, Bed Turnaround Time Report	Access the Bed Turnaround Time Report.

rep, Beds Out of Service Report (All)	Access the Beds Out of Service Report (All).
rep, Beds Out of Service Report (By Date)	Access the Beds Out of Service Report (By Date).
rep, Discharges In Progress	Access the Discharges In Progress.
rep, Emergency Management Evacuation Report	Access Emergency Management Evacuation Report
rep, Icon Usage Report	Access the Icon Usage Report
rep, Patient Inquiry	Access the Patient Inquiry report.
rep, Patient Movement Report	Access the Patient Movement Report.
rep, Patient Movements by Date	Access the Patient Movements by Date.
rep, Patients w Discharge Appointments	Access the Patients w Discharge Appointments.
rep, Scheduled Admissions by Date	Access the Scheduled Admissions by Date.
rep, Scheduled Admissions Report	Access the Scheduled Admissions Report.
rep, VISN Bed Summary Report	Access VISN Bed Summary Report
rep, VISN Network Active Report	Access the VISN Network Active Report.
rep, VISN Network Audit Report	Access the VISN Network Audit Report.
rep, VISN Network Contract Report	Access the VISN Network Contract Report.
rep, VISN Network Disposition Report	Access the VISN Network Disposition Report.
rep, Wait List Status Report	Access the Patients Pending Placement Status Report.
Reports, Index Read	'Submit' buttons from the Home page corresponding to the reports.
SiteOptions, Index Read	Home page, Site Options link.
SiteOptions, EvacuationConfirmation Read	Access to Evacuation Confirmation page.
SiteOptions, Index Update	'Submit' button from Site Options page.
SiteOptions, EvacuationConfirmation Update	'Save' button from Evacuation Confirmation page.
Transfer, AddTransfer Read	VISN page, Add New Patient button, Submit button from the Select Patient page.
Transfer, EditTransfer Read	'Edit' link from the VISN page, Patients in Community

Operation Name	Operation Description
	Hospitals list.
Transfer, FinalizeTransfer Read	'Finalize' link from the VISN page, Patients in Community Hospitals list.
Transfer, Index Read	VISN page, Add New Patient button.
Transfer, AddTransfer Update	VISN page, Add New Patient button, Submit button from the Select Patient page, and Submit button from the Enter Patient Data page.
Transfer, EditTransfer Update	'Edit' link from the VISN page's Patients in Community Hospitals list and then Submit button.
Transfer, FinalizeTransfer Update	'Finalize' link from the VISN page's Patients in Community Hospitals list and then Submit button from the Finalize Patient Data page.
UnavailableReason, Delete Read	'Delete' link from the Bed Board Site Unavailable Reason page's list.


UnavailableReason, Edit Read	'Edit' link from the Bed Board Site Unavailable Reason page's list.
UnavailableReason, Index Read	Site Options, Unavailable Reason Add/Edit link.
UnavailableReason, Delete Update	'Delete' link from the Bed Board Site Unavailable Reason page's list and then 'Delete Record' button.
UnavailableReason, Edit Update	'Edit' link from the Bed Board Site Unavailable Reason page's list and then Submit button.
UnavailableReason, Index Update	'Add' button from the Bed Board Site Unavailable Reason page.
UserConfiguration, Index Read	Site Options, Add/Edit BMS User link.
UserConfiguration, SearchUser Read	'Find and Save' buttons from the 'Select user' page ('Select Existing NT User Name' button from the Site Options, 'Add/Edit BMS User' link ).
UserConfiguration, SelectUser Read	'Select Existing NT User Name' button from the Site Options - Add/Edit BMS User page.
UserConfiguration, Index Update	'Submit' button from the Site Options - Add/Edit BMS User page.
VistalIntegration, Audit Read	'Audit' tab on ADMINISTRATION SECTION - Background Processors page (Background Processors Submenu) and 'Filter By' button from the 'Audit' tab.
VistalIntegration, Categories Read	'VistA Integration' tab on ADMINISTRATION SECTION - Background Processors page (Background Processors Submenu).
VistalIntegration, DeleteScheduler Read	'Add new scheduler' link and select a scheduled name from the 'Scheduled' tab.
VistalIntegration, Index Read	'Background Processors' link on ADMINISTRATION SECTION.
VistalIntegration, Schedulers Read	'Schedulers' tab on ADMINISTRATION SECTION - Background Processors page (Background Processors Submenu).
VistalIntegration, TestMDWSConnection Read	'TestMDWSConnection' button from the 'VistA Sites' tab.
VistalIntegration, TestODBCConnection Read	'TestODBCConnection' button from the 'VistA Sites' tab.
VistalIntegration, VistASites Read	'VistA Sites' tab on ADMINISTRATION SECTION - Background Processors page (Background Processors Submenu).
VistalIntegration, Categories Update	'Save and Run' buttons from the 'VistA Integration' tab.
VistalIntegration, DeleteScheduler Update	'Delete' link from the 'Scheduled' tab and then 'Delete Record' button.

Operation Name	Operation Description
VistalIntegration, Schedulers Update	'Save' button from the 'Scheduled' tab.
VistalIntegration, VistASites Update	'Save' button from the 'VistA Sites' tab.
WaitingArea, Delete Read	'Delete' link from the Patient Waiting Areas page's list of Current Waiting Areas.
WaitingArea, Edit Read	'Edit' link from the Patient Waiting Areas page's list of Current Waiting Areas.
WaitingArea, Index Read	Site Options, Waiting Area Add/Delete link.
WaitingArea, DeleteAction Update	'Delete' link from the Patient Waiting Areas page's list of Current Waiting Areas and then 'Delete Record' button.
WaitingArea, Edit Update	'Edit' link from the Patient Waiting Areas page's list of Current Waiting Areas and then Submit button.
WaitingArea, Index Update	'Add' button from the Patient Waiting Areas page.
WardConfiguration, Delete Read	'Delete' link from the Bed Board Ward Configuration, Current Vista Wards list.

WardConfiguration, Index Read	Site Options, Vista Ward Add/Edit link.
WardConfiguration, Index Update	Site Options, Vista Ward Add/Edit link, Save button.
WardConfiguration, DeleteWard Update	Site Options, Vista Ward Add/Edit link, Delete operation.
WardOccupancy, Index Read	'Submit' button from the Home page corresponding to the Ward Occupancy.
WardWhiteboard, Edit Read	Click on a link from the BED column from WARD Whiteboard Report.
WardWhiteboard, EditPT Read	Click on a link from the PT column from the WARD Whiteboard Report.
WardWhiteboard, Index Read	Home page, 'Ward Whiteboard' link.
WardWhiteboard, NotifyChange Read	Click on a link from the BED column from WARD Whiteboard Report and then on the Submit button.
WhiteboardStaff, Index Read	Click on the checkbox from the STAFF column from the WARD Whiteboard Home.
WardWhiteboard, ShowReport Read	'Export Report' link from the right of the WARD Whiteboard Home page or WARD Whiteboard Report page, Export Report.
WardWhiteboard, Submit Read	'Submit' button from the WARD Whiteboard Home page.
WardWhiteBoard, WardWhiteBoard Read	Home page, 'Ward Whiteboard' link, Submit button from the WARD Whiteboard Home.
WardWhiteboard, ClearAll Read	Click on a link from the BED column from WARD Whiteboard Report and then click on the button 'Clear ALL Comments For ALL Wards Associate To This Bed...!.
WardWhiteBoard, WardWhiteBoard Update	Click on a staff name from the STAFF column from the WARD WhiteBoard Report and then click on the image 'Save Staff'.
WhiteboardStaff, Index Update	Click on the checkbox from the STAFF column from WARD Whiteboard Report and then on the 'Save' button.
WardWhiteboard, Edit Update	Click on a link from the BED column from WARD Whiteboard Report and then on the Submit button.

## 7.3 Task Definitions


To view the definition of a task, select Task definitions from the left-hand panel of the main Policy Manager window and in the list in the right-hand area, double-click the task to display the following dialog window.

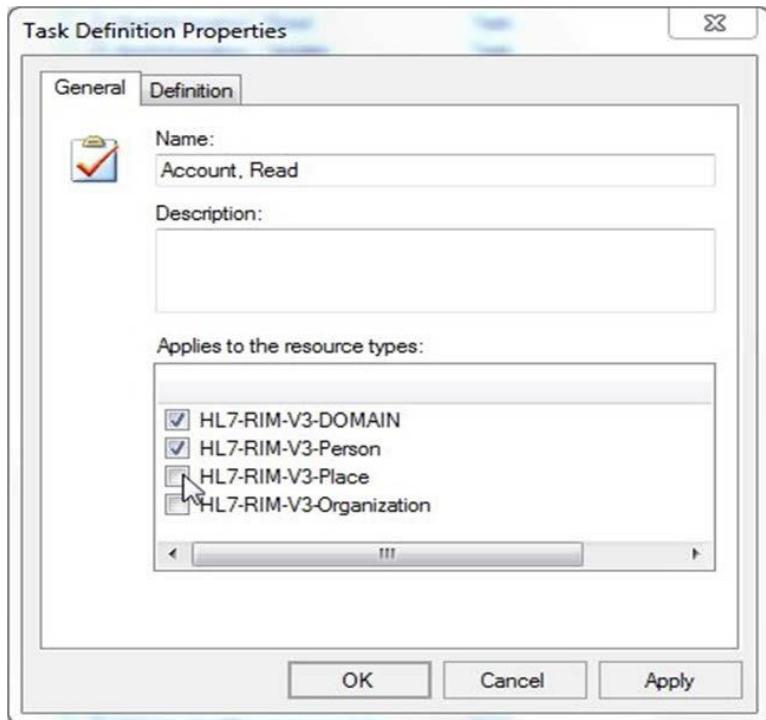

**Figure 79-Task Definition**

To determine what resource type the task refers to, select one or more of the elements in the “*Applies to resource types*” area.

To view the operations that need to be performed in order to complete the task, select the Definition tab to display it as in the following image:

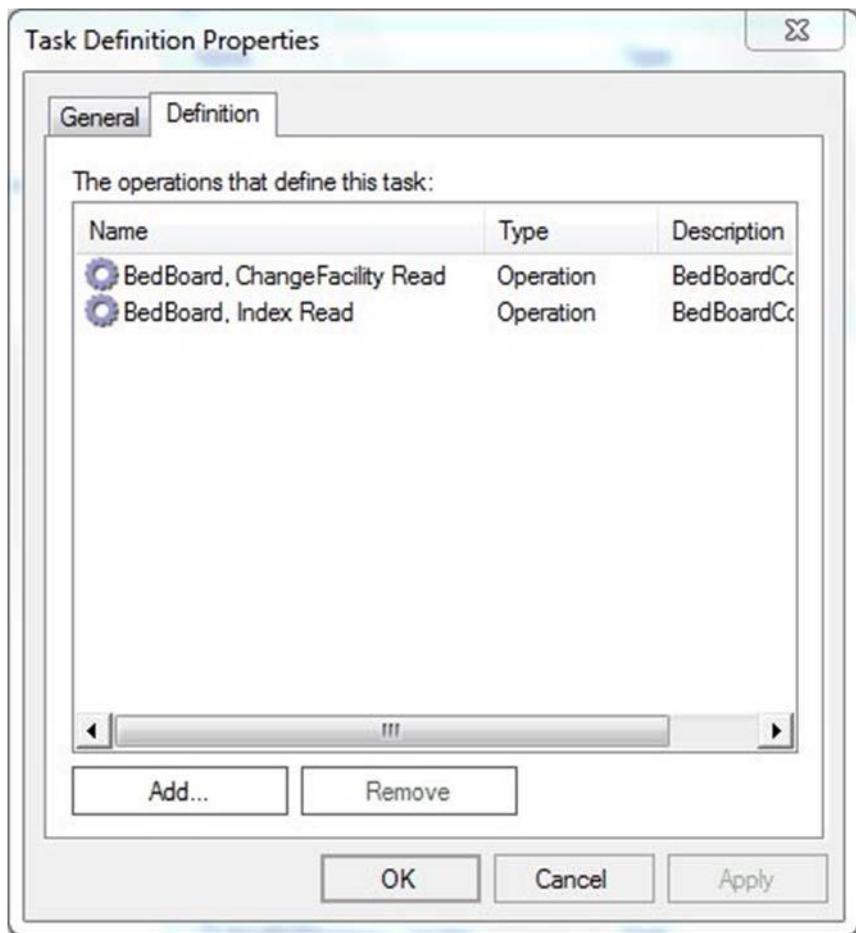

**Figure 80-Operations Defining a Task**

Use the Add and Remove buttons to add or remove operations from the list.

A list with all the tasks, along with corresponding operations of the BMS application, is presented below:

**Table 28- BMS Tasks**

Task Name	Task Description	Operation Name
Admin, Read	Admin Read permission, user has the right only to view data.	Admin, AddEditUser Read
		Admin, FacilityEdit Read
		Admin, Index Read
		Admin, SelectUser Read
		Admin, SisterSiteAddEdit Read
		Admin, AddUserOperations Read
		Admin, RemoveUsers Read
		Admin, SearchUser Read
		Admin, SearchUsers Read
		Admin, ClearCache Read
		Admin, AddEditUser Update
		Admin, FacilityEdit Update

Admin, Update	Admin Update permission, user has the right to modify data.	Admin, SisterSiteAddEdit Update Admin, AddUserOperations Admin, RemoveUserOperations
AdminComments, Read	AdminComments Read permission, user has the right only to view data.	AdminComments, Delete Read AdminComments, Edit Read AdminComments, Index Read
AdminComments, Update	AdminComments Update permission, user has the right to modify data.	AdminComments, Index Update
AdminIcon, Read	AdminIcon Read permission, user has the right only to view data.	AdminIcon, Delete Read AdminIcon, Edit Read AdminIcon, Index Read AdminIcon, Search Read AdminIcon, ViewIconReport Read
AdminIcon, Update	AdminIcon Update permission, user has the right to modify data.	AdminIcon, Delete Update AdminIcon, Edit Update

Task Name	Task Description	Operation Name
		AdminIcon, Index Update
AdminSpecialtyAssociation, Read	AdminSpecialtyAssociation Read permission, user has the right only to view data.	AdminSpecialtyAssociation, AdminSpecialtyAssociation,
AdminSpecialtyAssociation, Update	AdminSpecialtyAssociation Update permission, user has the right to modify data.	AdminSpecialtyAssociation, AdminSpecialtyAssociation,
AdminUnavailableReason, Read	AdminUnavailableReason Read permission, user has the right only to view data.	AdminUnavailableReason, AdminUnavailableReason, Edit AdminUnavailableReason, Index
AdminUnavailableReason, Update	AdminUnavailableReason Update permission, user has the right to modify data.	AdminUnavailableReason, AdminUnavailableReason, Edit AdminUnavailableReason, Index
AdminWaitingArea, Read	AdminWaitingArea Read permission, user has the right only to view data.	AdminWaitingArea, Delete Read AdminWaitingArea, Edit Read AdminWaitingArea, Index Read
AdminWaitingArea, Update	AdminWaitingArea Update permission, user has the right to modify data.	AdminWaitingArea, DeleteAction AdminWaitingArea, Edit Update AdminWaitingArea, Index Update
AdminWhiteboardReport, Read	AdminWhiteboardReport Read permission, user has the right only to view data.	AdminWhiteboardReport, Delete AdminWhiteboardReport, Edit AdminWhiteboardReport, Index
AdminWhiteboardReport, Update	AdminWhiteboardReport Update permission, user has the right to modify data.	AdminWhiteboardReport, Delete AdminWhiteboardReport, Edit
AdtOrderableItems, Read	AdtOrderableItems Read permission, user has the right only to view data.	AdtOrderableItems, Index Read
AdtOrderableItems, Update	AdtOrderableItems Update permission, user has the right to modify data.	AdtOrderableItems, Delete AdtOrderableItems, Index Update

BackgroundProcessors, Read	BackgroundProcessors Read permission, user has the right only to view data.	BackgroundProcessors, Index Read
BackgroundProcessors, Update	BackgroundProcessors Update permission, user has the right to modify data.	BackgroundProcessors, Index Update
AuditLogReport, Read	AuditLogReport Read permission, user has the	AuditLogReport, Index Read

Task Name	Task Description	Operation Name
	only to view data.	rep, Audit Log Report
BedBoard, Read	BedBoard Read permission, user has the right only to view data.	BedBoard, ChangeFacility Read
		BedBoard, Index Read
		BedBoard,
		BedBoard,
BedBoardModule, Read	BedBoardModule Read permission, user has the right only to view data.	BedBoardModule, Index Read
BedBoardModule, Update	BedBoardModule Update permission, user has the right to modify data.	BedBoardModule, Index Update
BedInformation, Read	BedInformation Read permission, user has the right only to view data.	BedInformation, Index Read
		BedInformation, ClearAll Read
		BedInformation, NotifyChange Read
BedInformation, Update	BedInformation Update permission, user has the right to modify data.	BedInformation, Index Update
ContingencySettings, Read	ContingencySettings Read permission, user has the right only to view data.	ContingencySettings, Index Read
ContingencySettings, Update	ContingencySettings Update permission, user has the right to modify data.	ContingencySettings, Index Update
DischargeClinic, Read	DischargeClinic Read permission, user has the right only to view data.	DischargeClinic, Index Read
DischargeClinic, Update	DischargeClinic Update permission, user has the right to modify data.	DischargeClinic, Delete Update
		DischargeClinic, Index Update
EmsBedStatusAdmin, EMS Supervisor	EmsBedStatusAdmin EMS Supervisor permission, user has the right to re-assign the bed cleaning to another person and to batch assign the cleaning to a person	EmsBedStatusAdmin, EMS
		EmsBedStatusAdmin,
		EmsBedStatusAdmin,
EmsBedStatusAdmin, Read	EmsBedStatusAdmin Read permission, user has the right only to view data.	EmsBedStatusAdmin, Edit Read
		EmsBedStatusAdmin, Index Read
		EmsBedStatusAdmin,
EmsBedStatusAdmin, Update	EmsBedStatusAdmin Update permission, user has the right to modify data.	EmsBedStatusAdmin, Edit Update
EMSMobile, Read	EMSMobile Read permission, user has the right only	EMSMobile, EMSList Read

Task Name	Task Description	Operation Name
	view data.	EMSMobile, Users Read
EMSMobile, Update	EMSMobile Update permission, user has the right to modify data.	EMSMobile, EMSList Update
		EMSMobile, Users Update
EmsNotification, Read	EmsNotification Read permission, user has the right only to view data.	EmsNotification, AddEdit Read
		EmsNotification, AddEditAction
		EmsNotification, Delete Read

		EmsNotification, Index Read
EmsNotification, Update	EmsNotification Update permission, user has the right to modify data.	EmsNotification, DeleteAction EmsNotification, Index Update
EmsStaff, Read	EmsStaff Read permission, user has the right only to view data.	EmsStaff, Delete Read EmsStaff, Edit Read EmsStaff, Index Read
EmsStaff, Update	EmsStaff Update permission, user has the right to modify data.	EmsStaff, Delete Update EmsStaff, Edit Update
EventNotification, Read	EventNotification Read permission, user has the right only to view data.	EventNotification, EventNotification, AddEdit Read EventNotification, EventNotification, Index Read
EventNotification, Update	EventNotification Update permission, user has the right to modify data.	EventNotification, Index Update
Exception, Read	Exception Read permission, user has the right only to view data.	Exception, Index Read
FacilityDiversion, Read	FacilityDiversion Read permission, user has the right only to view data.	FacilityDiversion, Add Read FacilityDiversion, FacilityDiversion, Edit Read FacilityDiversion, EditConfirmation FacilityDiversion, FilterDiversions FacilityDiversion, Index Read
FacilityDiversion, Update	FacilityDiversion Update permission, user has the right to modify data.	FacilityDiversion, Index Update

Task Name	Task Description	Operation Name
FacilitySettings, Read	FacilitySettings Read permission, user has the right only to view data.	FacilitySettings, Index Read
FacilitySettings, Update	FacilitySettings Update permission, user has the right to modify data.	FacilitySettings, Index Update
Home, Read	Home Read permission, user has the right only to view data.	Home, Index Read Home, Index2 Read Home, PatientInquiry Read Home, RemoveAdmission Read Home, UndoRemoveAdmission
Home, Update	Home Update permission, user has the right to modify data.	Home, RemoveAdmissionPost Home, UndoRemoveAdmissionPost
IconLegend, Read	IconLegend Read permission, user has the right only to view data.	IconLegend, Index Read
IconLibrary, Read	IconLibrary Read permission, user has the right only to view data.	IconLibrary, Edit Read IconLibrary, Index Read IconLibrary, ResetConfirmation
IconLibrary, Update	IconLibrary Update permission, user has the right	IconLibrary, Edit Update IconLibrary, Index Update

	to modify data.	IconLibrary, ResetConfirmation
Information, Read	Information Read permission, user has the right only to view data.	Information, Index Read
MaintainMarquee, Read	MaintainMarquee Read permission, user has the right only to view data.	MaintainMarquee, Index Read
MaintainMarquee, Update	MaintainMarquee Update permission, user has the right to modify data.	MaintainMarquee, ChangeMarquee Update
NationalAndRegional, Read	NationalAndRegional Read permission, user has the right only to view data.	NationalAndRegional, Index Read
NewEvents, Read	NewEvents Read permission, user has the right only to view data.	NewEvents, Index Read
Numi, Read	NUMI Read permission, user has the right only to view data.	Numi, Add Read
		Numi, Delete Read

Task Name	Task Description	Operation Name
		Numi, Edit Read
		Numi, Index Read
Numi, Update	NUMI Update permission, user has the right to modify data.	Numi, Delete Update
PAP, User	PAP permission, the right to access methods exposed by PAP service.	<a href="http://tempuri.org/IAdministrativeFunctions/GetDomains">http://tempuri.org/IAdministrativeFunctions/GetDomains</a> <a href="http://tempuri.org/IAdministrativeFunctions/GetCurrentDomain">http://tempuri.org/IAdministrativeFunctions/GetCurrentDomain</a>  <a href="http://tempuri.org/IAdministrativeFunctions/GetRoles">http://tempuri.org/IAdministrativeFunctions/GetRoles</a> <a href="http://tempuri.org/IAdministrativeFunctions/GetBulkPolicies">http://tempuri.org/IAdministrativeFunctions/GetBulkPolicies</a>  <a href="http://tempuri.org/IAdministrativeFunctions/GrantPermission">http://tempuri.org/IAdministrativeFunctions/GrantPermission</a>  <a href="http://tempuri.org/IAdministrativeFunctions/RevokePermission">http://tempuri.org/IAdministrativeFunctions/RevokePermission</a>  <a href="http://tempuri.org/IAdministrativeFunctions/GetRoleByName">http://tempuri.org/IAdministrativeFunctions/GetRoleByName</a>  <a href="http://tempuri.org/IAdministrativeFunctions/GetPermissionsByResourceType">http://tempuri.org/IAdministrativeFunctions/GetPermissionsByResourceType</a> <a href="http://tempuri.org/IAdministrativeFunctions/GetAllUsersAndDomain">http://tempuri.org/IAdministrativeFunctions/GetAllUsersAndDomain</a> <a href="http://tempuri.org/IAdministrativeFunctions/GetAllUserRoles">http://tempuri.org/IAdministrativeFunctions/GetAllUserRoles</a>  <a href="http://tempuri.org/IAdministrativeFunctions/AssignUser">http://tempuri.org/IAdministrativeFunctions/AssignUser</a> <a href="http://tempuri.org/IAdministrativeFunctions/DeassignUser">http://tempuri.org/IAdministrativeFunctions/DeassignUser</a>  <a href="http://tempuri.org/IAdministrativeFunctions/GetPolicy">http://tempuri.org/IAdministrativeFunctions/GetPolicy</a> <a href="http://tempuri.org/IAdministrativeFunctions/ClearPermissionsForResource">http://tempuri.org/IAdministrativeFunctions/ClearPermissionsForResource</a> <a href="http://tempuri.org/IAdministrativeFunctions/AddActionEntityType">http://tempuri.org/IAdministrativeFunctions/AddActionEntityType</a>  <a href="http://tempuri.org/IAdministrativeFunctions/AddOperation">http://tempuri.org/IAdministrativeFunctions/AddOperation</a>  <a href="http://tempuri.org/IAdministrativeFunctions/AddRole">http://tempuri.org/IAdministrativeFunctions/AddRole</a> <a href="http://tempuri.org/IAdministrativeFunctions/AddTask">http://tempuri.org/IAdministrativeFunctions/AddTask</a> <a href="http://tempuri.org/IAdministrativeFunctions/AssignOperations">http://tempuri.org/IAdministrativeFunctions/AssignOperations</a>

	<a href="http://tempuri.org/IAdministrativeFunctions/AssignRole">http://tempuri.org/IAdministrativeFunctions/AssignRole</a>
	<a href="http://tempuri.org/IAdministrativeFunctions/ChangeUser">http://tempuri.org/IAdministrativeFunctions/ChangeUser</a>

Task Name	Task Description	Operation Name
		<a href="#">Password</a> <a href="http://tempuri.org/IAdministrativeFunctions/DeassignOperations">http://tempuri.org/IAdministrativeFunctions/DeassignOperations</a> <a href="http://tempuri.org/IAdministrativeFunctions/DeassignRole">http://tempuri.org/IAdministrativeFunctions/DeassignRole</a> <a href="http://tempuri.org/IAdministrativeFunctions/DeleteActionEntityType">http://tempuri.org/IAdministrativeFunctions/DeleteActionEntityType</a> <a href="http://tempuri.org/IAdministrativeFunctions/DeleteOperation">http://tempuri.org/IAdministrativeFunctions/DeleteOperation</a> <a href="http://tempuri.org/IAdministrativeFunctions/DeletePermissionForResourceAndOperation">http://tempuri.org/IAdministrativeFunctions/DeletePermissionForResourceAndOperation</a> <a href="http://tempuri.org/IAdministrativeFunctions/DeletePermissionsForResourcesAndOperations">http://tempuri.org/IAdministrativeFunctions/DeletePermissionsForResourcesAndOperations</a> <a href="http://tempuri.org/IAdministrativeFunctions/DeleteRole">http://tempuri.org/IAdministrativeFunctions/DeleteRole</a> <a href="http://tempuri.org/IAdministrativeFunctions/DeleteTask">http://tempuri.org/IAdministrativeFunctions/DeleteTask</a> <a href="http://tempuri.org/IAdministrativeFunctions/GetActionEntityTypes">http://tempuri.org/IAdministrativeFunctions/GetActionEntityTypes</a> <a href="http://tempuri.org/IAdministrativeFunctions/GetAvailable Domains">http://tempuri.org/IAdministrativeFunctions/GetAvailable Domains</a> <a href="http://tempuri.org/IAdministrativeFunctions/GetCallerIsSuperUser">http://tempuri.org/IAdministrativeFunctions/GetCallerIsSuperUser</a> <a href="http://tempuri.org/IAdministrativeFunctions/GetConnectedRolesAndOperations">http://tempuri.org/IAdministrativeFunctions/GetConnectedRolesAndOperations</a> <a href="http://tempuri.org/IAdministrativeFunctions/GetEntityTypes">http://tempuri.org/IAdministrativeFunctions/GetEntityTypes</a> <a href="http://tempuri.org/IAdministrativeFunctions/GetOperationByName">http://tempuri.org/IAdministrativeFunctions/GetOperationByName</a> <a href="http://tempuri.org/IAdministrativeFunctions/GetOperationByNameExcludingId">http://tempuri.org/IAdministrativeFunctions/GetOperationByNameExcludingId</a> <a href="http://tempuri.org/IAdministrativeFunctions/GetOperations">http://tempuri.org/IAdministrativeFunctions/GetOperations</a> <a href="http://tempuri.org/IAdministrativeFunctions/GetRoleByNameExcludingId">http://tempuri.org/IAdministrativeFunctions/GetRoleByNameExcludingId</a> <a href="http://tempuri.org/IAdministrativeFunctions/GetRoleDefinition">http://tempuri.org/IAdministrativeFunctions/GetRoleDefinition</a> <a href="http://tempuri.org/IAdministrativeFunctions/GetRolesDefinitionIntersect">http://tempuri.org/IAdministrativeFunctions/GetRolesDefinitionIntersect</a> <a href="http://tempuri.org/IAdministrativeFunctions/GetRoleUsers">http://tempuri.org/IAdministrativeFunctions/GetRoleUsers</a> <a href="http://tempuri.org/IAdministrativeFunctions/GetSubscriptions">http://tempuri.org/IAdministrativeFunctions/GetSubscriptions</a>

Task Name	Task Description	Operation Name
		<a href="http://tempuri.org/IAdministrativeFunctions/GetTaskByName">http://tempuri.org/IAdministrativeFunctions/GetTaskByName</a> <a href="http://tempuri.org/IAdministrativeFunctions/GetTaskByNameExcludingId">http://tempuri.org/IAdministrativeFunctions/GetTaskByNameExcludingId</a> <a href="http://tempuri.org/IAdministrativeFunctions/GetTaskDefinition">http://tempuri.org/IAdministrativeFunctions/GetTaskDefinition</a> <a href="http://tempuri.org/IAdministrativeFunctions/GetTasks">http://tempuri.org/IAdministrativeFunctions/GetTasks</a> <a href="http://tempuri.org/IAdministrativeFunctions/ GetUserBySid">http://tempuri.org/IAdministrativeFunctions/ GetUserBySid</a>

		http://tempuri.org/IAdministrativeFunctions/GetUserByName
		http://tempuri.org/IAdministrativeFunctions/ GetUserDefinedRoles
		http://tempuri.org/IAdministrativeFunctions/ GetUserGroupId
		http://tempuri.org/IAdministrativeFunctions/ GetUserRoles
		http://tempuri.org/IAdministrativeFunctions/ InsertPermissionForResourceAndOperation
		http://tempuri.org/IAdministrativeFunctions/ InsertPermissionsForResourcesAndOperations
		http://tempuri.org/IAdministrativeFunctions/ InsertResource
		http://tempuri.org/IAdministrativeFunctions/ IsChild
		http://tempuri.org/IAdministrativeFunctions/ RefreshCache
		http://tempuri.org/IAdministrativeFunctions/ SearchUsers
		http://tempuri.org/IAdministrativeFunctions/ SetCurrentDomain
		http://tempuri.org/IAdministrativeFunctions/ SyncronizeAllSubscribers
		http://tempuri.org/IAdministrativeFunctions/ UpdateOperation
		http://tempuri.org/IAdministrativeFunctions/ UpdateRole
		http://tempuri.org/IAdministrativeFunctions/ UpdateTask
Patient, Read	Patient Read permission, user has the right only to view data.	Patient, Admission Read
		Patient, Select Read
Patient, Update	Patient Update permission, user has the right to modify data.	Patient, Admission Update
Reporting Services, Fetch	Reporting Services Fetch permission, the right to bring	rep, Active Admission Orders Report

Task Name	Task Description	Operation Name
	the list of reports from Reporting Services.	rep, Active Discharge Orders Report rep, Active Transfer Orders Report rep, Antic Discharge Orders Report rep, BED AVAILABILITY STATUS REPORT rep, Bed Specialty Report rep, Bed Specialty Roster rep, Bed Summary Report rep, Bed Turnaround Time Report rep, Beds Out of Service Report (All) rep, Beds Out of Service Report (By Date) rep, Discharges In Progress rep, Emergency Management Evacuation rep, Icon Usage Report rep, Patient Inquiry rep, Patient Movement Report rep, Patient Movements by Date

		rep, Patients w Discharge Appointments rep, Scheduled Admissions by Date rep, Scheduled Admissions Report rep, VISN Bed Summary Report rep, VISN Network Active Report rep, VISN Network Audit Report rep, VISN Network Contract Report rep, VISN Network Disposition Report rep, Wait List Status Report
Reports, Read	Reports permission, user has the right only to view data.	Reports, Index Read
SiteOptions, Read	SiteOptions permission, user has the right only to view data.	SiteOptions, Index Read SiteOptions, EvacuationConfirmation Read
SiteOptions,	SiteOptions Update permission, user has the right	SiteOptions, Index Update

Task Name	Task Description	Operation Name
	modify data.	SiteOptions, EvacuationConfirmation
Transfer, Read	Transfer permission, user has the right only to view data.	Transfer, AddTransfer Read Transfer, EditTransfer Read Transfer, FinalizeTransfer Read Transfer, Index Read
Transfer, Update	Transfer Update permission, user has the right to modify data.	Transfer, AddTransfer Update Transfer, EditTransfer Update Transfer, FinalizeTransfer Update
UnavailableReason, Read	UnavailableReason Read permission, user has the right only to view data.	UnavailableReason, Delete Read UnavailableReason, Edit Read UnavailableReason, Index Read
UnavailableReason, Update	UnavailableReason Update permission, user has the right to modify data.	UnavailableReason, Delete Update UnavailableReason, Edit Update UnavailableReason, Index Update
UserConfiguration, Read	UserConfiguration permission, user has the right only to view data.	UserConfiguration, Index Read UserConfiguration, SearchUser UserConfiguration, SelectUser Read
UserConfiguration, Update	UserConfiguration Update permission, user has the right to modify data.	UserConfiguration, Index Update
VistaIntegration, Read	VistaIntegration permission, user has the right only to view data.	VistaIntegration, Audit Read VistaIntegration, Categories Read VistaIntegration, DeleteScheduler VistaIntegration, Index Read VistaIntegration, Schedulers Read VistaIntegration, VistaIntegration, VistaIntegration, VistASites Read
		VistaIntegration, Categories Update

VistaIntegration, Update	VistaIntegration Update permission, user has the right to modify data.	VistaIntegration, DeleteScheduler VistaIntegration, Schedulers Update
--------------------------	--	--

Task Name	Task Description	Operation Name
		VistaIntegration, VistaSites Update
WaitingArea, Read	WaitingArea permission, user has the right only to view data.	WaitingArea, Delete Read
		WaitingArea, Edit Read
		WaitingArea, Index Read
WaitingArea, Update	WaitingArea Update permission, user has the right to modify data.	WaitingArea, DeleteAction Update
		WaitingArea, Edit Update
		WaitingArea, Index Update
WardConfiguration, Read	WardConfiguration permission, user has the right only to view data.	WardConfiguration, Delete Read
		WardConfiguration, Index Read
WardConfiguration, Update	WardConfiguration Update permission, user has the right to modify data.	WardConfiguration, Index Update
		WardConfiguration, DeleteWard
WardOccupancy, Read	WardOccupancy permission, user has the right only to view data.	WardOccupancy, Index Read
WardWhiteboard, Read	WardWhiteboard permission, user has the right only to view data.	WardWhiteboard, Edit Read
		WardWhiteboard, EditPT Read
		WardWhiteboard, Index Read
		WardWhiteboard, NotifyChange
		WhiteboardStaff, Index Read
		WardWhiteboard, ShowReport
		WardWhiteboard, Submit Read
		WardWhiteBoard, WardWhiteBoard
		WardWhiteboard, ClearAll Read
WardWhiteboard, Update	WardWhiteboard Update permission, user has the right to modify data.	WardWhiteBoard, WardWhiteBoard
		WhiteboardStaff, Index Update
		WardWhiteboard, Edit Update

## 7.4 Role Definitions

To view the actual definition of a BMS user role, from the Definitions folder select Role Definitions and double click the role name in the main panel of Policy Manager: in the Role Definition Properties dialog window, select the Definition tab to display it as in the following image:

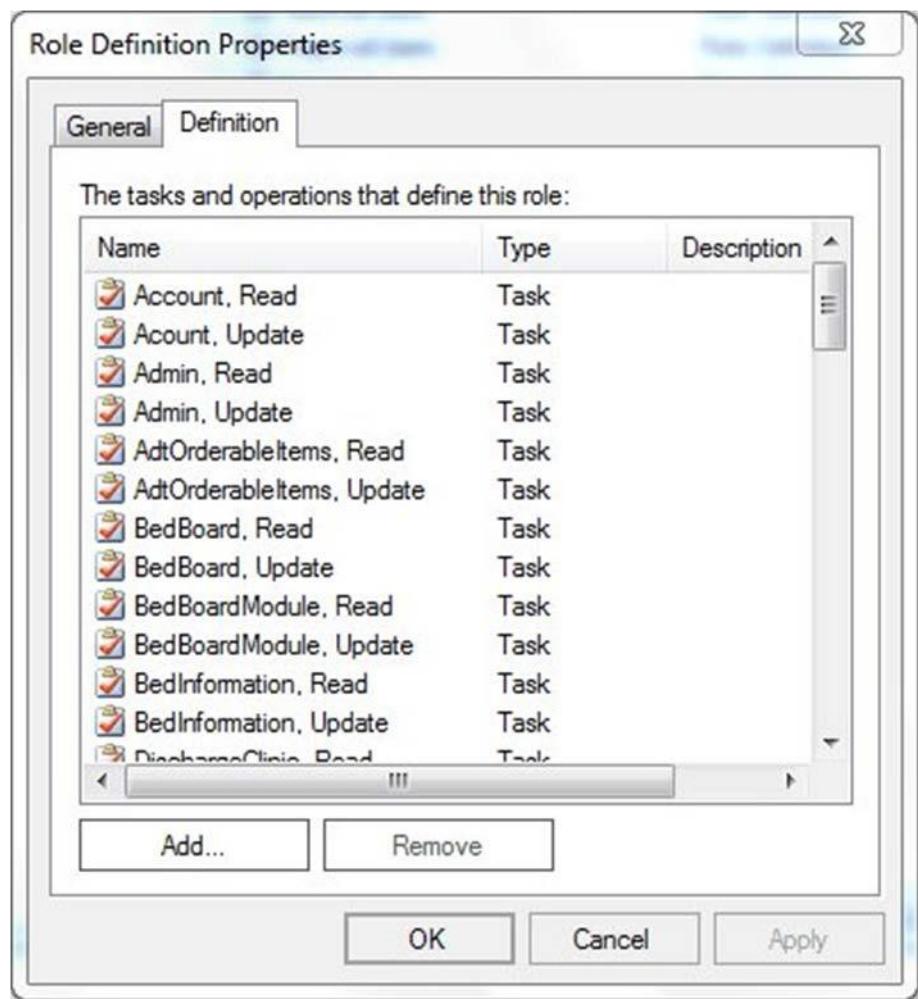


Figure 81-Role Definition

## 7.5 Assigning a Role to a User

To assign one of the roles defined for BMS to a user follow the steps below.

From the main page of Policy Manager, from Role assignments folder select a role then right-click and select “Assign Windows Users and Groups”: the following dialog is displayed.


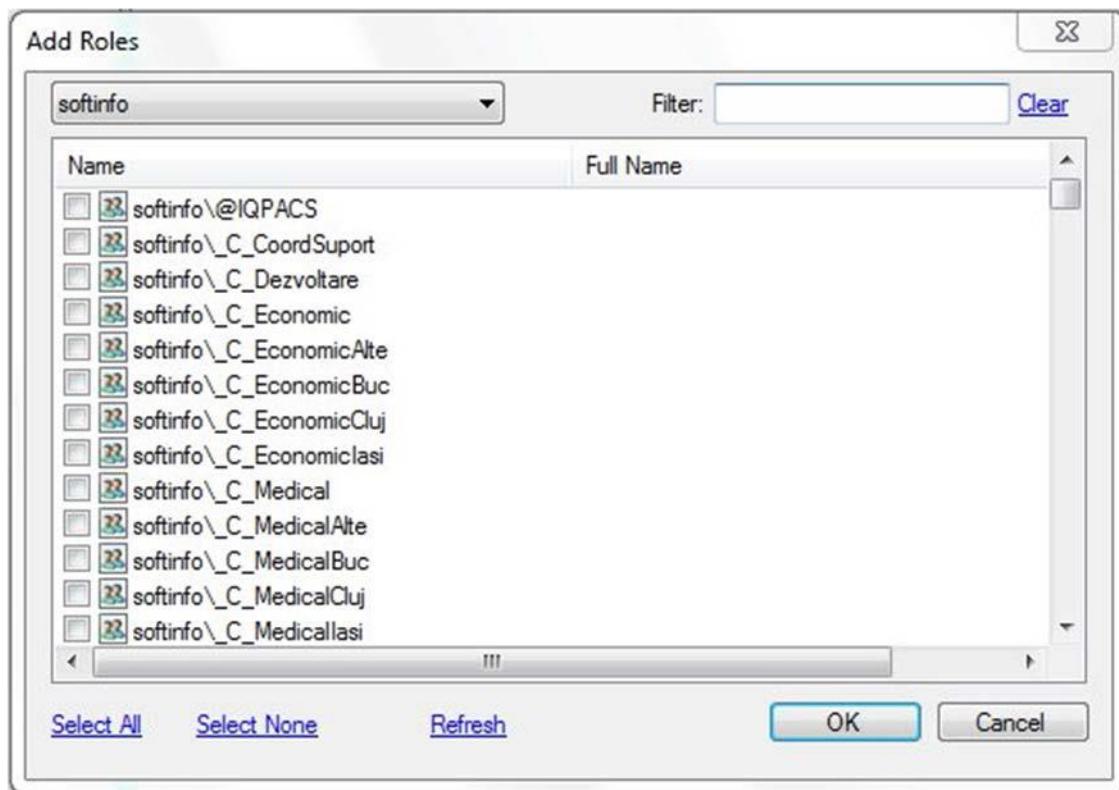


Figure 82-Assigning Roles to Users

A list of users and user groups existing in the current domain are displayed. Use the arrow button of the field in the upper left corner of the dialog to select the domain and the Filter field if necessary, and then click each applicable check box to select the user or group of users for which you want to assign the selected BMS role. Click OK to finalize the operation.

## 7.6 Adding a New Role


To add a new role, click the Add Role button from the main Policy Manager window or right-click Role Definitions folder and select New Role Definition...: the following dialog window is displayed:

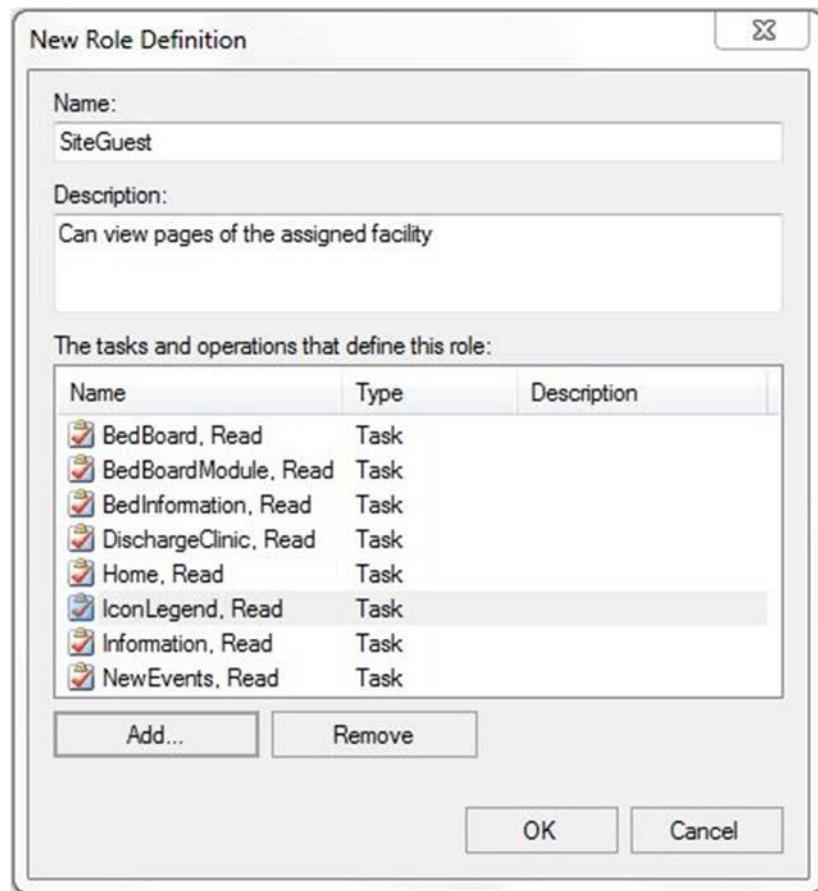

**Figure 83-New Role Definition**

Enter the name of the new role and a short description.


To add the tasks and operations that can be performed for this role click the Add button to display the following dialog window:

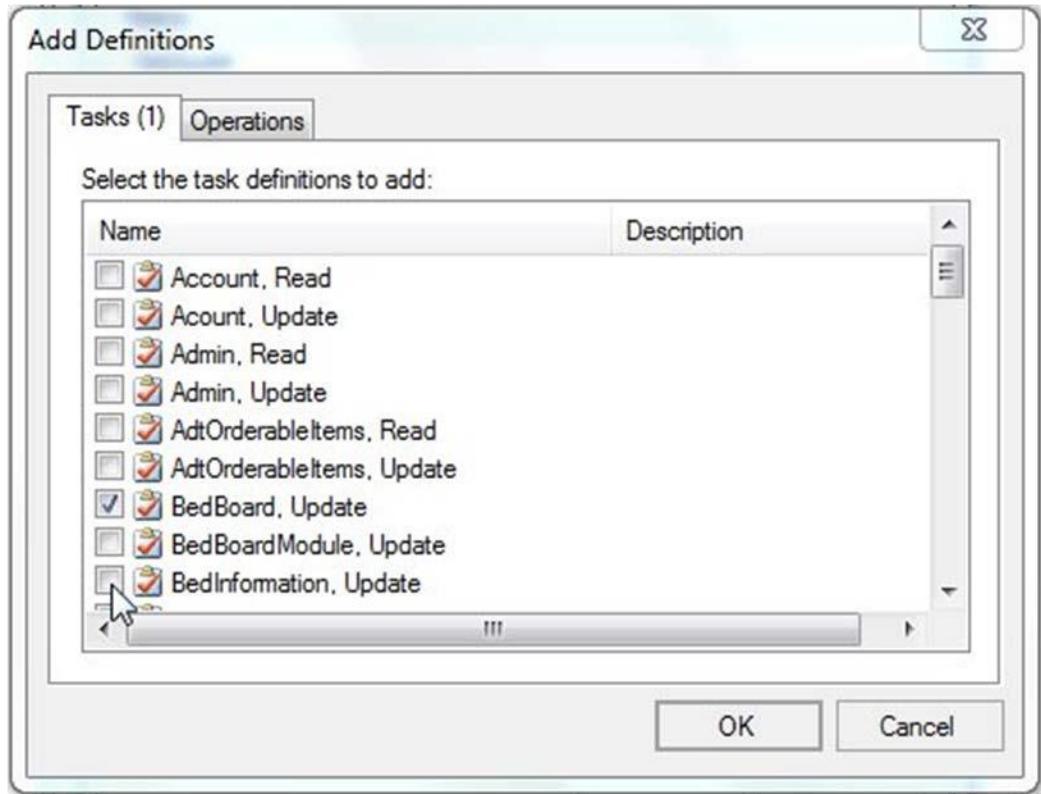

**Figure 84-Adding Tasks and Operations to a Role**

Tasks and operations that can be performed within the BMS system are available in separate tabs. Select the ones to be included in the definition of the current role (the number of selected tasks/operations will be displayed in the corresponding tab title) then press OK:

The selected tasks and operations will be displayed in the New Role Definition dialog box. Press OK to add the role to the list of roles defined for BMS: The Roles Definitions list will be updated to contain the new role. To add the new role to the Role Assignment folder, select the folder, right-click and select Assign Roles to display the following dialog window:

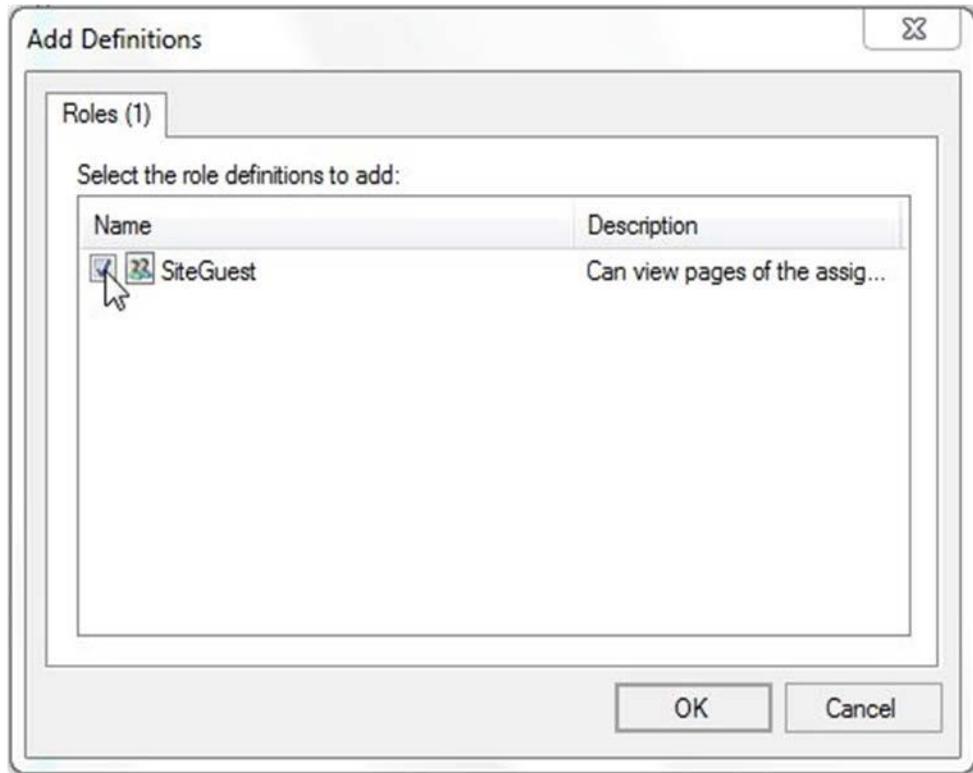


**Figure 85-Add Role to Role Assignments List**

Select the role then press OK: The newly added role will be displayed in the Role Assignments list and you will be able to assign the new role to BMS users.

## 7.7 Adding a New Task

To add a new task, click the Add Task button from the main Policy Manager window or right-click Task Definitions folder and select New Task Definition: The following dialog window is displayed:

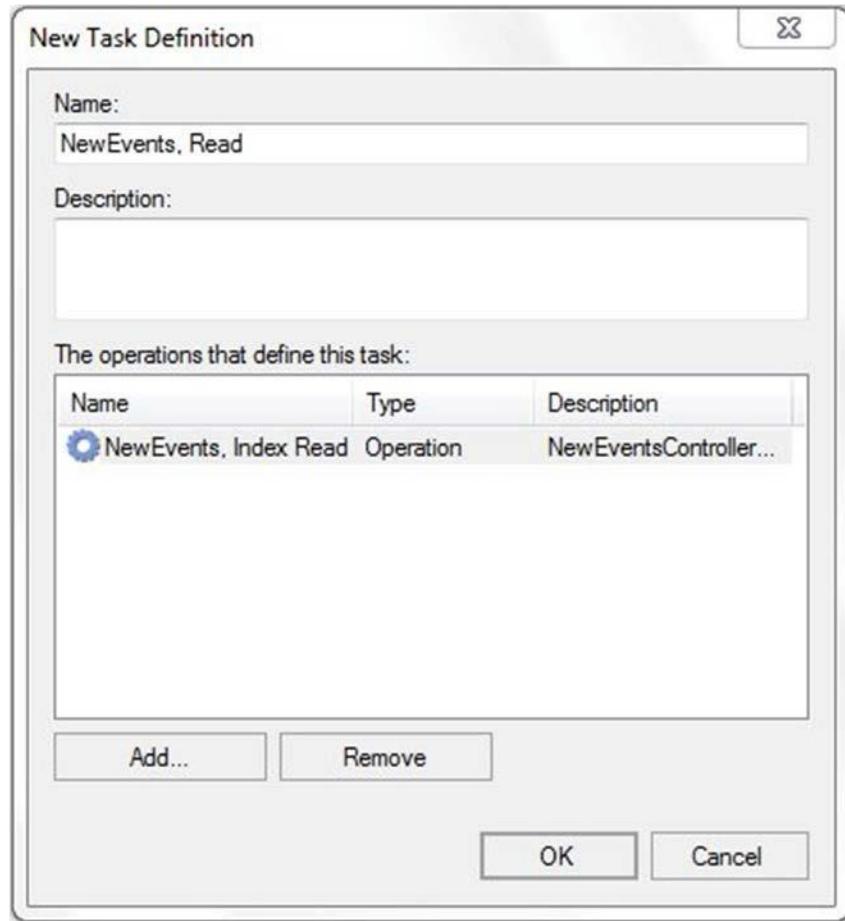

**Figure 86-New Task Definition**

Enter the name of the new task followed by read/write option and a short description.  
To add the operations that define the Task, click the Add button to display the following dialog window:

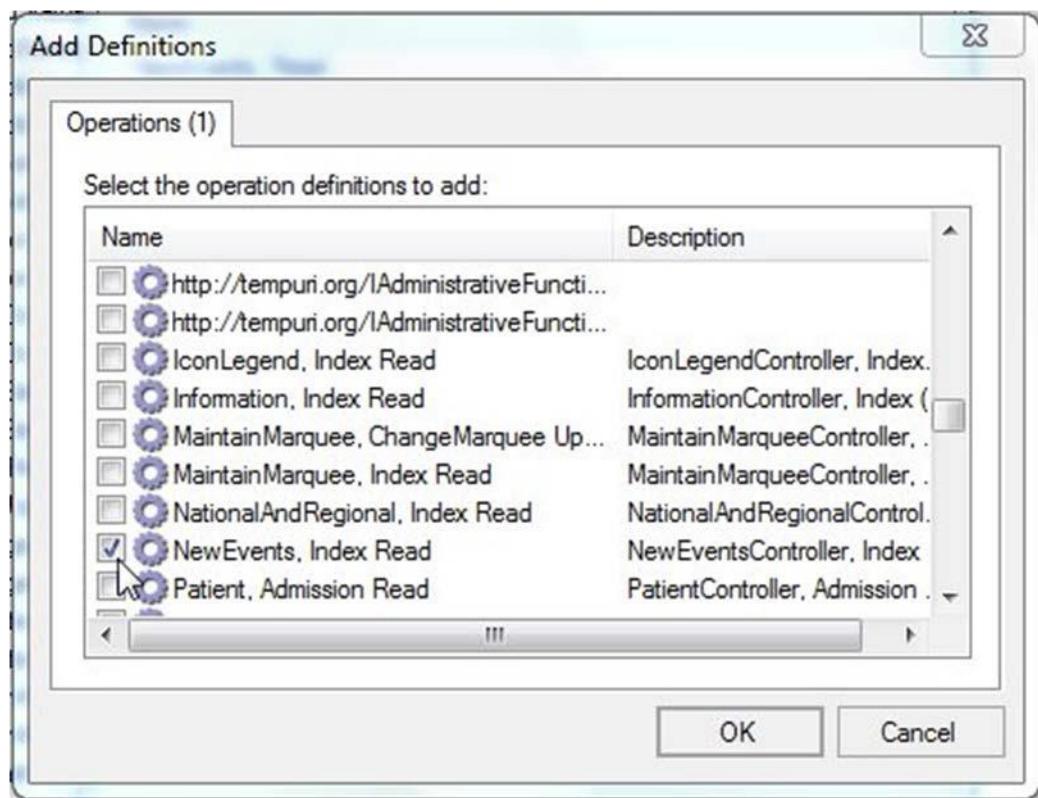


Figure 87-Adding Operations to a Task

Select the operations that define the selected task then click OK to return to the New Task Definition dialog box. Click OK to add the new task to the Task Definitions list.

## 7.8 Adding a New Operation

To add a new operation, click the Add Operation button from the main Policy Manager window or right-click Operation Definitions folder and select New Operation Definition: The following dialog window is displayed.


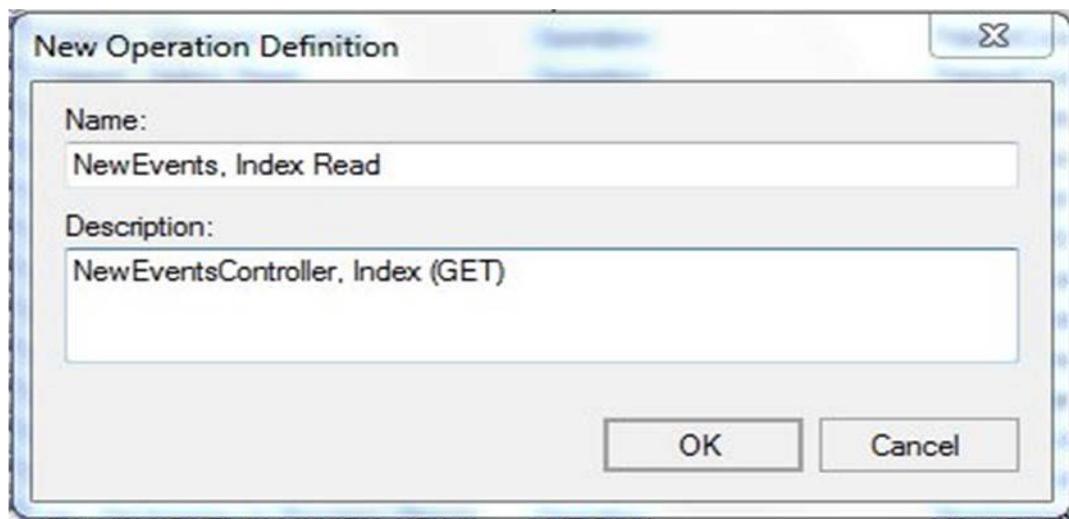


Figure 88-New Operation Definition

Enter the name of the new operation followed by read/write option and a short description. Click OK to add the new operation to the Operation Definitions list.

## 7.9 Business scenarios and use cases

### Authentication

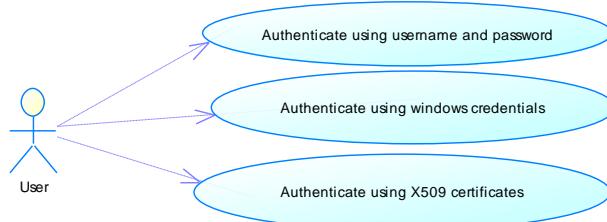

**Figure 89-Authentication Use Cases**


<b>Section</b>	<b>Description</b>
<b>Use Case Name</b>	User authentication
<b>Summary</b>	In the above diagram it is represented the methods that a client application can use to authenticate their users.
<b>Preconditions</b>	The users, that will use the client application, need to be defined in an Active Directory
<b>Triggers</b>	External
<b>Basic course of events</b>	<ol style="list-style-type: none"> <li>1. The client application will send the user and the password or windows credentials</li> <li>2. The system verifies the login information.</li> <li>3. The system returns the result of the verification to the client application.</li> </ol>
<b>Alternative paths</b>	<ol style="list-style-type: none"> <li>1. The client application will send the X509 certificate of his user</li> <li>2. The system verifies the certificate</li> <li>3. The system returns the result</li> </ol>

### Authorization



**Figure 90-Authorization Use Cases**

<b>Section</b>	<b>Description</b>
<b>Use Case Name</b>	User authorization
<b>Summary</b>	In the above diagram it is represented the methods that a client application can use to check if an authenticated user has access to a specified action on a resource.
<b>Preconditions</b>	The users, actions and resources must be defined in an Active Directory structure that the Security Service is using.
<b>Triggers</b>	External
<b>Basic course of events</b>	<ol style="list-style-type: none"> <li>1. The client application will invoke a check access method for a specified action on a specific resource</li> <li>2. The system will find the actions that the requesting users has access</li> <li>3. The system returns true/false if the action requested is among the users defined actions</li> </ol>

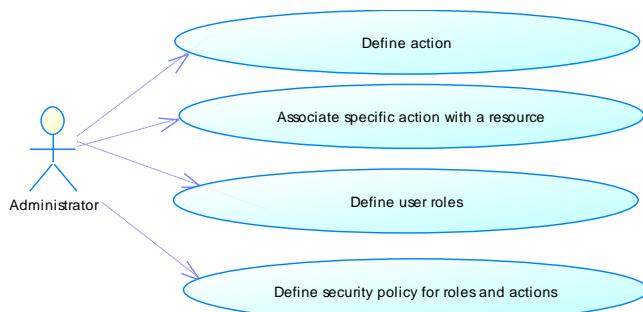

**Figure 91- Authorization Administration Use Cases**

<b>Section</b>	<b>Description</b>
<b>Use Case Name</b>	Action and resource management
<b>Summary</b>	Administrative console can define actions and resources and associate an action with a resource type.
<b>Preconditions</b>	The association method mandates that the action and the resource type should already be defined
<b>Triggers</b>	External
<b>Basic course of events</b>	<ol style="list-style-type: none"> <li>1. The client application will invoke a create action</li> <li>2. The system will try to create requested action.</li> <li>3. The system will fail if the specified action name already exists, or specified id already exists.</li> </ol>

<b>Section</b>	<b>Description</b>
<b>Use Case Name</b>	Role management
<b>Summary</b>	Administrative console can define user roles and associate users/user groups with roles.
<b>Preconditions</b>	The association method mandates that the role should already be defined
<b>Triggers</b>	External
<b>Basic course of events</b>	<ol style="list-style-type: none"> <li>1. The client application will invoke a create role</li> <li>2. The system will try to create requested role.</li> <li>3. The system will fail if the specified role name already exists, or specified id already exists.</li> </ol>

<b>Section</b>	<b>Description</b>
<b>Use Case Name</b>	Security policy management
<b>Summary</b>	Administrative console can associate users (groups of users) with roles. These roles are then associated with an action (operation).
<b>Preconditions</b>	The association method mandates that the action and the resource type should already be defined.
<b>Triggers</b>	External

## 8 Detailed Functional Model on Each Interface

### 8.1 Service contracts

#### Authentication

The security service for authentication is represented by STS – security token cache that will issue a token whether the authentication succeeded, otherwise it will deny access to the application server. This STS Service will authenticate the user through WS-Security and validate application servers through WS-Trust using SAML v2.0 Token (Security Assertion Markup Language).

#### Authorization

The security services for authorization are represented by a PDP and PAP implementation. PDP stands for policy decision point where the authenticated user can check the permission for a specified action on a specified resource. PAP stands for policy administration point. Here an administrative console can define actions, resource-types, roles and make associations with them (define security policies) that will serve for PDP. The PDP service exposes one method: CheckAccess, whilst PAP service has specific functions for policy administration.

#### Detailed functional model on each interface

## STS – Security Token Service

- Authenticate

<b>Business friendly name</b>	User authentication
<b>Description</b>	The function decides if the user and the password supplied as parameters are valid. Will return true on success and false on any failure.
<b>Inputs</b>	Windows client credentials or Username – representing the username of the requested user. Password – the password of the requested user.
<b>Outputs</b>	True - on success False – on failure

## PDP – Policy Decision Point

- CheckPermission

<b>Business friendly name</b>	User authorization – check Access
<b>Signature</b>	<i>Message CheckAccess (Message request);</i>
<b>Description</b>	The function decides if the user has the privilege to access the specified action(s) on the specified resource.
<b>Inputs</b>	Username, operation name and resource id are encapsulated in the SAML Message class
<b>Outputs</b>	A Message containing the permit or deny result.

## PAP – Policy Administration Point

Name	Description	Input	Output
<b>AddRole</b>	Adds a role	<i>String name</i> – name of the new role <i>String description</i> – role description	<i>String</i> – new role's id
<b>Delete Role</b>	Delete a role	<i>String id</i> – role's id	<i>String</i> – deleted role's id
<b>Update Role</b>	Update a role	<i>String id</i> – role's id <i>String name</i> – role's name <i>String description</i> – role's description	<i>bool</i> – operation result: <i>true</i> on succeeded; <i>false</i> if any error aroused
<b>Update Task</b>	Update a task	<i>String id</i> – task's id <i>String name</i> – task's name <i>String description</i> – task's description	<i>bool</i> – operation result: <i>true</i> on succeeded; <i>false</i> if any error aroused
<b>Update Operation</b>	Update an operation	<i>String id</i> – operation's id <i>String name</i> – operation's name <i>String description</i> – operation's description	<i>bool</i> – operation result: <i>true</i> on succeeded; <i>false</i> if any error aroused
<b>IsChild</b>	Verifies if the sent operation is part of a task	<i>String id</i> – operation id	<i>bool</i> – operation result
<b>Assign User</b>	Assign an user to a role	<i>String userId</i> – user's id (SID) <i>String roleId</i> – role's id	-
<b>DeassignUser</b>	Delete an association between an user and a role	<i>String userId</i> – user's id (SID) <i>String roleId</i> – role's id	-
<b>Grant</b>	Grant access to a	<i>string resourceId, string actionId,</i>	-

<b>Permission</b>	resource for a role on an action	<i>string roleId</i>	
<b>Revoke Permission</b>	Revokes a permission	<i>string resourceId, string actionId, string roleId</i>	-
<b>GetRoles</b>	Returns a list with all stored roles	<i>Bool assignedOnly - returns assigned roles if parameter is true</i>	<i>List&lt;Role&gt;</i> - retrieved roles
<b>Get Operations</b>	Returns a list with all stored operations	-	<i>List&lt;Operation&gt;</i> - retrieved operations
<b>GetTasks</b>	Returns a list with all stored tasks	-	<i>List&lt;Task&gt;</i> - retrieved tasks
<b>Add Operation</b>	Add a new operation	<i>String name – operation's name String description – operation's description</i>	<i>String id – operation's id</i>
<b>Delete Operation</b>	Delete an operation	<i>String – operation's id</i>	-
<b>AddTask</b>	Add a new task	<i>String name – task's name String description – task's description</i>	<i>String id – task's id</i>
<b>Delete Task</b>	Delete a task	<i>String id – task's id</i>	-
<b>Assign Operations</b>	Associate operations to a task	<i>List&lt;String&gt; operationIds – list of operations to be assigned String taskId – task's id</i>	-
<b>DeassignOperations</b>	Deassign operations from a task	<i>List&lt;String&gt; operationIds – list of operations to be assigned String taskId – task's id</i>	-
<b>GetTaskDefinition</b>	Retrieve a list with all operations of the specified task	<i>String id – task's id</i>	<i>List&lt;DefinitionBase&gt;</i> - operation list
<b>GetRole Definition</b>	Returns all associated operations to a specified role	<i>String roleId – role's id</i>	<i>List&lt;DefinitionBase&gt;</i> - operation list
<b>GetRole ByName</b>	Returns a role by name	<i>String name – role's name</i>	<i>Role</i> – returned role
<b>GetRole ByName Excluding</b>	Returns a role by name excluding the role id sent by parameter	<i>String name – role's name Guid id – role's id</i>	<i>Role</i> – returned role
<b>GetTask ByName</b>	Returns a task by name	<i>String name – task's name</i>	<i>Task</i> – returned task
<b>GetTask ByName ExcludingId</b>	Returns a task by name excluding the task id sent by parameter	<i>String name – task's name Guid id – task's id</i>	<i>Task</i> – returned task
<b>Get Operation ByName</b>	Returns an operation by name	<i>String name – operation's name</i>	<i>Operation</i> – returned operation
<b>Get Operation ByName ExcludingId</b>	Returns an operation by name excluding the operation id sent by parameter	<i>String name – operation's name Guid id – operation's id</i>	<i>Operation</i> – returned operation
<b>Get Permissions By Resource Type</b>	Returns a list with operations/task associated with a resource type	<i>String resourceType – Resource type</i>	<i>List&lt;DefinitionBase&gt;</i> – operation/task list
<b>GetPolicy</b>	Returns a list with all roles and operations associated with the resource	<i>String resourceId – resource's id</i>	<i>List&lt;Role&gt;</i> – role list. Each role has the associated operations.

<b>GetRole Users</b>	Returns a list with all users associated to a specific role	<i>Guid</i> roleId – role's id	<i>List&lt;User&gt;</i> – user list
<b>Assign Role</b>	Marks a role as assigned	<i>Guid</i> roleId – role's id	-
<b>Deassign Role</b>	Marks a role as unassigned	<i>Guid</i> roleId – role's id	-
<b>Get Connected RolesAndOperations</b>	Returns a list with all roles and operations associated with the resource	<i>String</i> resourceId – resource's id	<i>List&lt;Role_Operation&gt;</i> – list with role-operations associations
<b>Clear Permissions For Resource</b>	Removes all permissions for a certain resource (all associations to this resource)	<i>String</i> resourceId – resource's id	-
<b>Delete PermissionFor Resource And Operation</b>	Deletes a permission form a role based on the resource and operation sent.	<i>String</i> resourceId – resource's id <i>String</i> roleId – role's id <i>String</i> actionGUID – operation's id	-
<b>Insert PermissionFor Resource And Operation</b>	Creates a permission for a certain role and an operation on a resource. It automatically creates the association within the permission and the operation if it doesn't exist.	<i>String</i> resourceId – resource's id <i>String</i> roleId – role's id <i>String</i> actionGUID – operation's id	-

The security services do not expose a fault contract as usual web services do. Instead, these services deliver information about any issue in processing the request in the return message of the service call (such as authentication error, authorization error etc.).

## Data contracts

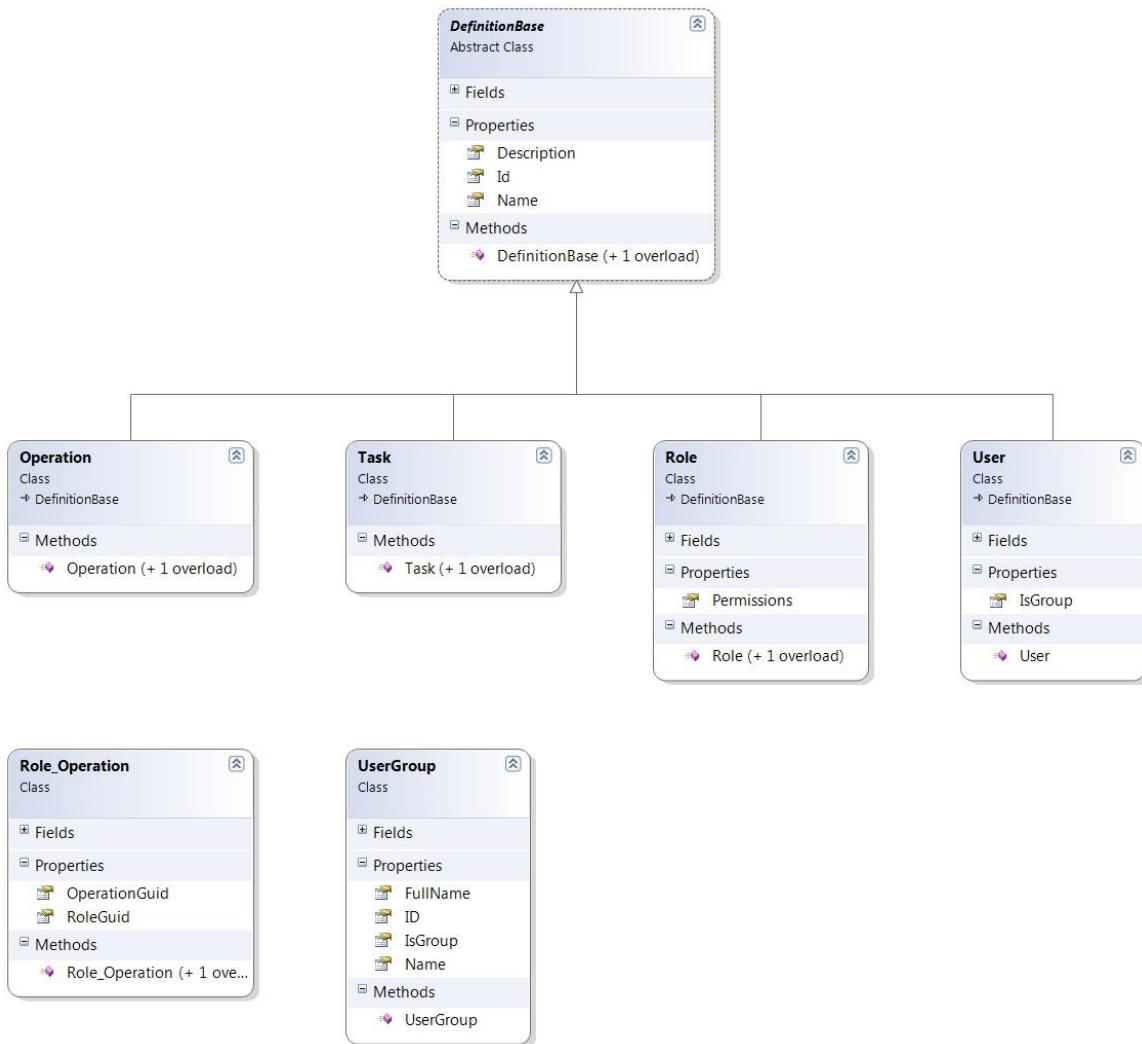


Figure 92-Class Diagram for Data Contracts in PAP and PDP

## 8.2 BMS Roles

BMS users fall under the following categories:

**Administrators:** This type of user will customize the BMS settings according to the needs of a facility. They will have access to the Site Options pages. This role refers to a group of users whose members are the person(s) responsible for setting up BMS options for the current facility.

**AuditLogUsers:** This type of user will have access to Audit Log Report. This role cannot be used alone, only together with another role.

**EmsStaff:** The EMS group of users will be allowed to edit and update the bed cleaning process but not the other parts of the bed board. Any member of your EMS staff that will be interacting with BMS must be in this group.

**EMSSupervisorUsers:** The EMS supervisor group of users will be allowed to view the requests for bed clean

operations, to filter existing requests by different criteria and to select requests in order to assign them to EMS staff. This role cannot be used alone, only together with EmsStaff role.

**Guests:** The guest user will be allowed to generate the National Bed Availability report from National/Regional page.

**National Users/Regional Users:** This type of user will have access to the National/Regional page only.

**Site Users:** This type of user only has access to the BMS facility page.

**Support Users:** This type of user will have access to the Administrative page of the BMS solution. They configure the sites for the BMS facilities and grant access and read/write rights to the users.

**VISN Users:** This type of user will have access to the pages of different facilities within the VISN where they have been granted access.

## 9 Troubleshooting

This section contains information on common issues with using BMS solution and how those may be resolved.

### Symptom 1

When you try to load the BMS application, one of the following error messages appear:

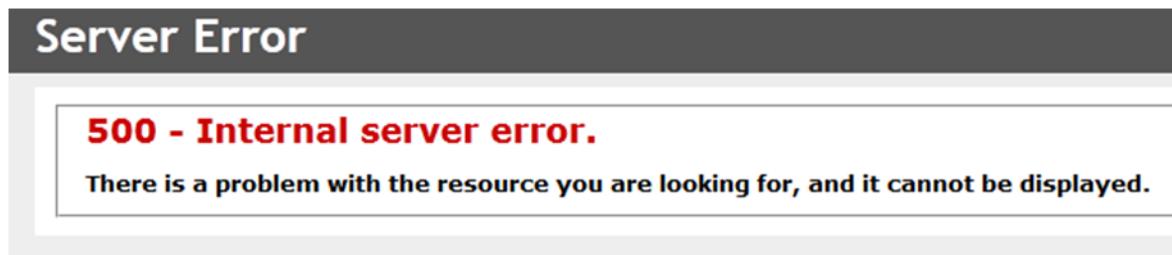


Figure 93-500 Server Error

### Problem

IIS is not started/running.

### Diagnoses and Solutions

Start the IIS Manager and check if the Application Pool Identity is set to the correct service account. (). Verify the BMS pool is started, If stopped right click on the BMS, Select ‘Start’.

Verify the Site ‘BMS’ is started. If not select ‘BMS’ under the Site folder in IIS Manager, select ‘Start’ from the ‘Manage Web Site’ panel on the right side of the IIS Manager.

## Symptom 2

When trying to load the BMS application, one of the following error messages appears:



**Figure 94-No Facilities Error**

## Diagnoses and Solutions

Go to the MULx5 machine and check if the BMS.ServiceHost service is stopped. Start the services.msc console and start the service.

Verify the service started.

## Symptom 3

When trying to load the BMS application, one of the following error messages appears:




**Figure 95-Unhandled Exception**

## Diagnoses and Solutions

- Check if BMS.BMService service is stopped or SQL Server might also have stopped.
- Go to the SQL Server machine and start the SQL Server from the SQL Server Configuration Manager. Verify if the connection string to the database server is set properly.
- Then go to the services' machine, start the services.msc console and start the BMS.BMService service.

## Symptom 4

When trying to log-in to the BMS application, the following error is displayed:

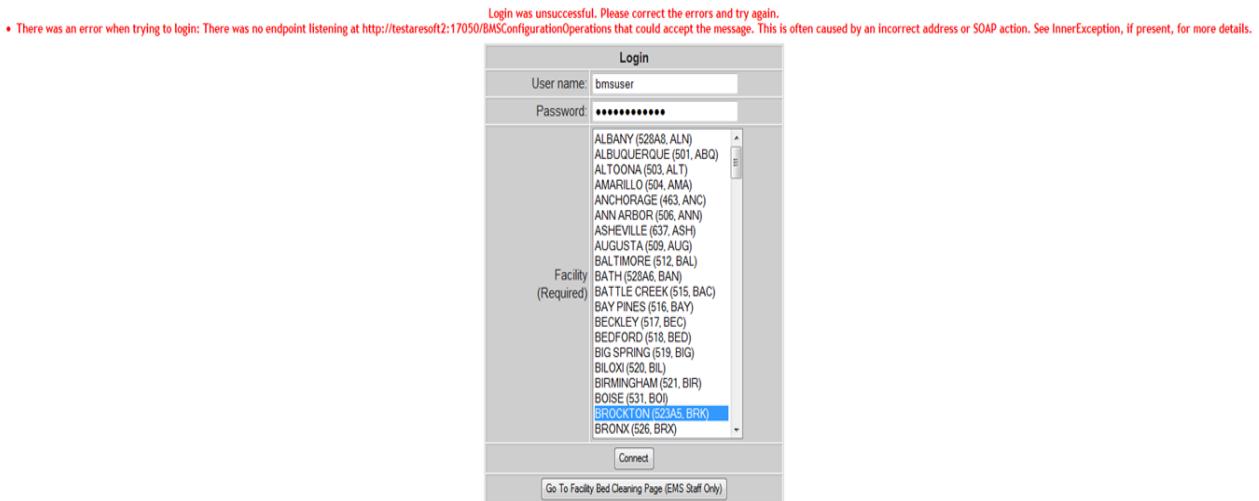

**Figure 96-Login Unsuccessful**

## Diagnoses and Solutions

Check if BMS.BMService service is stopped. Go to the services' machine, start the services.msc console and start the service.

### Symptom 5


Data does not appear in the reports. Data does not get refreshed in the reports.

## Diagnoses and Solutions

In SQL Configuration Manager, check if the SQL Server Agent is started, and if it isn't start it; then, in the SQL Server Management Studio, check if the *BMS - Reports Full* and *BMS - Reports Incremental* are deployed and run without errors. If the jobs are not deployed, install them.

### Symptom 6

A report is missing from Other Reports section on the Facility Home Page (e.g. *EMS Bed Status Report (Admin)*).

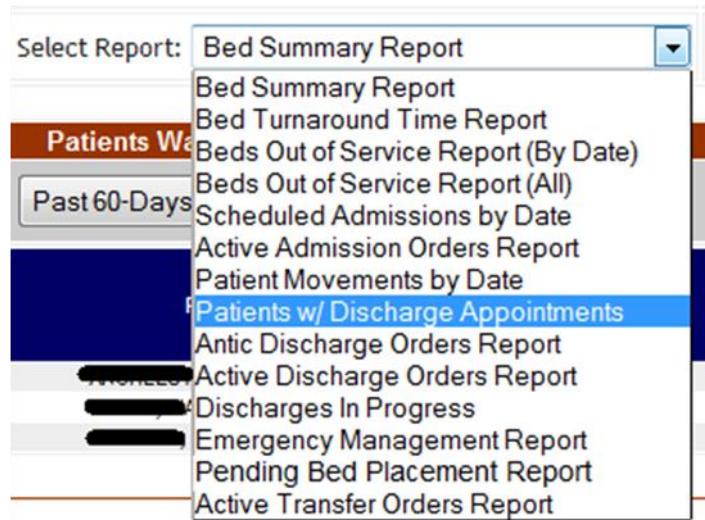

**Figure 97- EMS Bed Status Report is Missing**


### Diagnoses and Solutions

Check if the report is missing from the SQL Server Reporting Services. Go to the management web page and add the missing report (Upload File).

### Symptom 7

When trying to view one of the reports (other than the *Other Reports*) the following error appears:

[Return to Previous Page](#)



**Figure 98- Report Cannot be Found**

### Diagnoses and Solutions

Check if the mentioned report is missing from the Reporting Services. Go to the management web page and add the specified report.

### BMS Log Files

There are five log files available to anyone supporting the BMS system, the **WinServiceHost**, the **SecurityHost**, the **BMS.ServiceHost**, the **BMS.VI.ServiceHost** and the **WebTrace log**.

- The WinServiceHost log file is named BMS-Services.log and its location is on the application server (vaausbmsmulx5) D:\BMS\Bin.
- The SecurityHost log file is named BMS-Security.log and its location is on the application server

(vaausbmsmulx5) D:\BMS\Bin.

- The BMS.ServiceHost logfile is named BMS.trace.log and its location is on the application server (vaausbmsmulx5) at D:\BMS\Bin\BMS.
- The BMS.VI.ServiceHost logfile is named BMS.VI.trace.log and its location is on the application server (vaausbmsmulx6) at D:\BMS\Bin\BMS.
- The Web trace log is named WebTrace.log and its location is on the web server (vaausbmswebx5) at D:\BMS\BMS.Web.

These logs contain various types of information (informational, warnings, and errors) with the exception of the web trace log, which only contains error messages.

There is no log file for MDWS, those errors are captured through our integration calls and posted in the BMS.ServiceHost log file (Trace.log). These are bit trickier to debug as in any attempt requires the exact parameters to be passed to MDWS.

## 10 Appendix A – BMS Diagrams

### 10.1 Business Process Diagrams

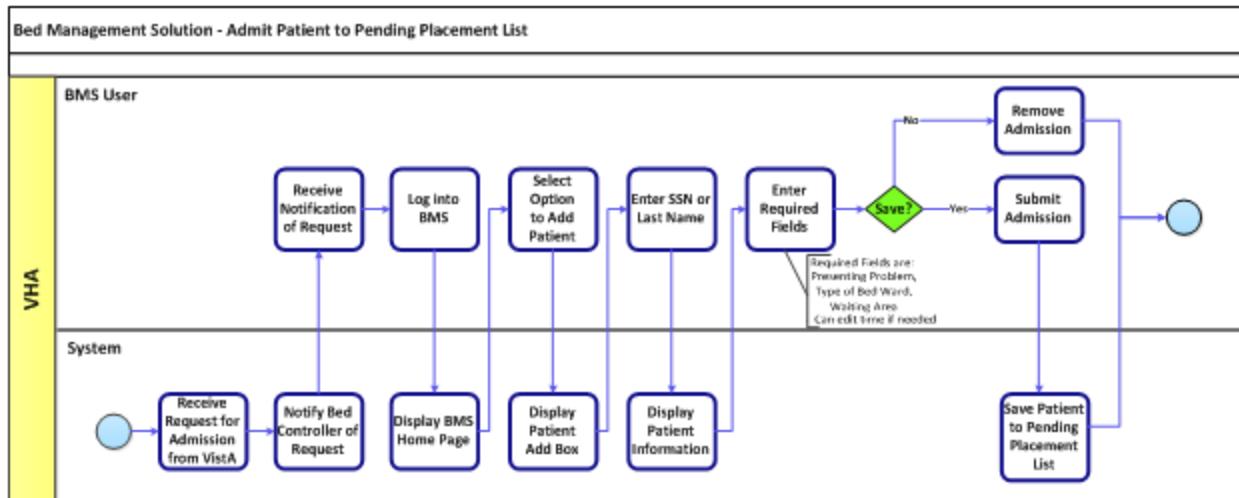


Figure 99-Admit Patient to PPBP Business Process

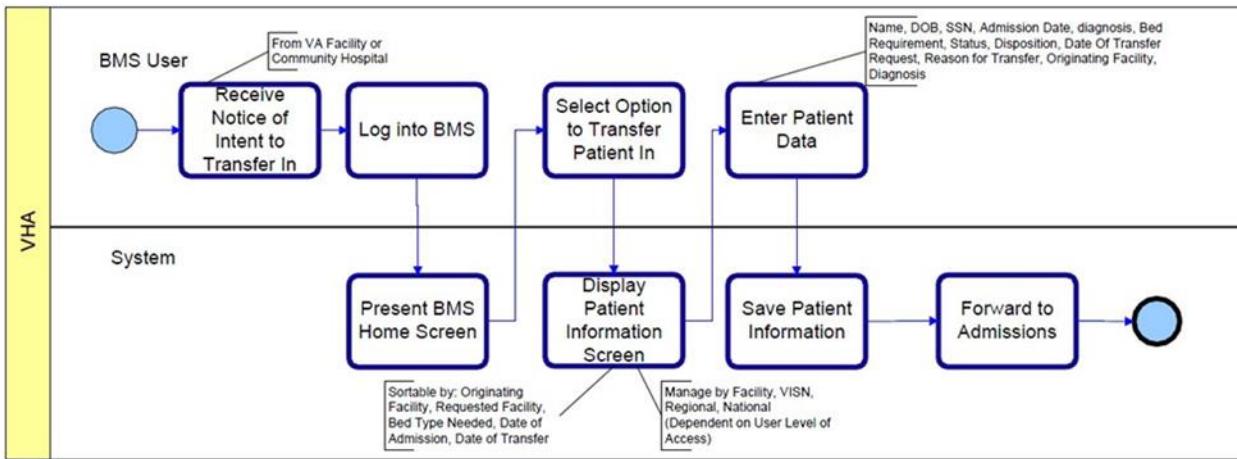


Figure 100-Transfer Patients to PPBP Business Process



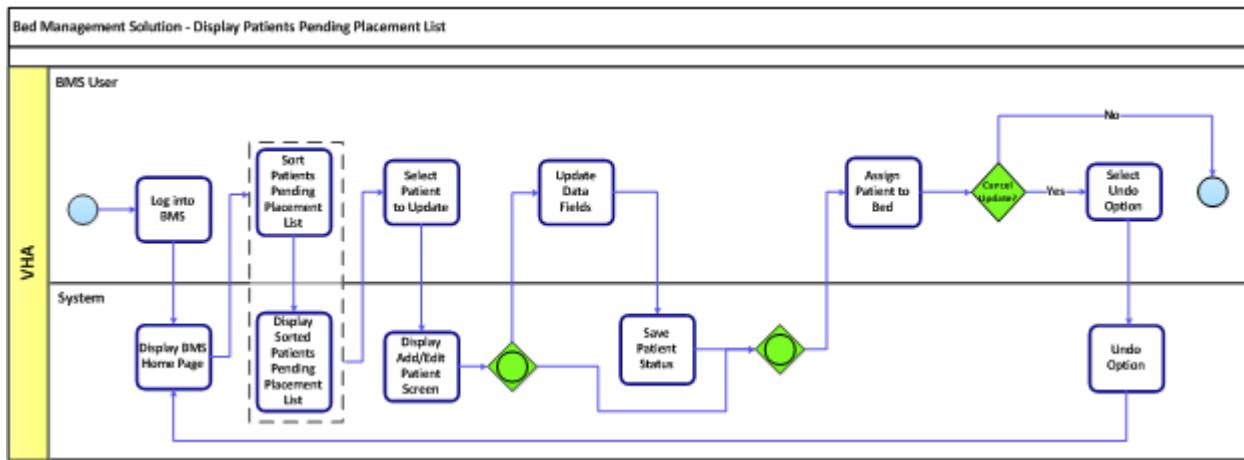



Figure 101-Display and Update PPBP Business Process

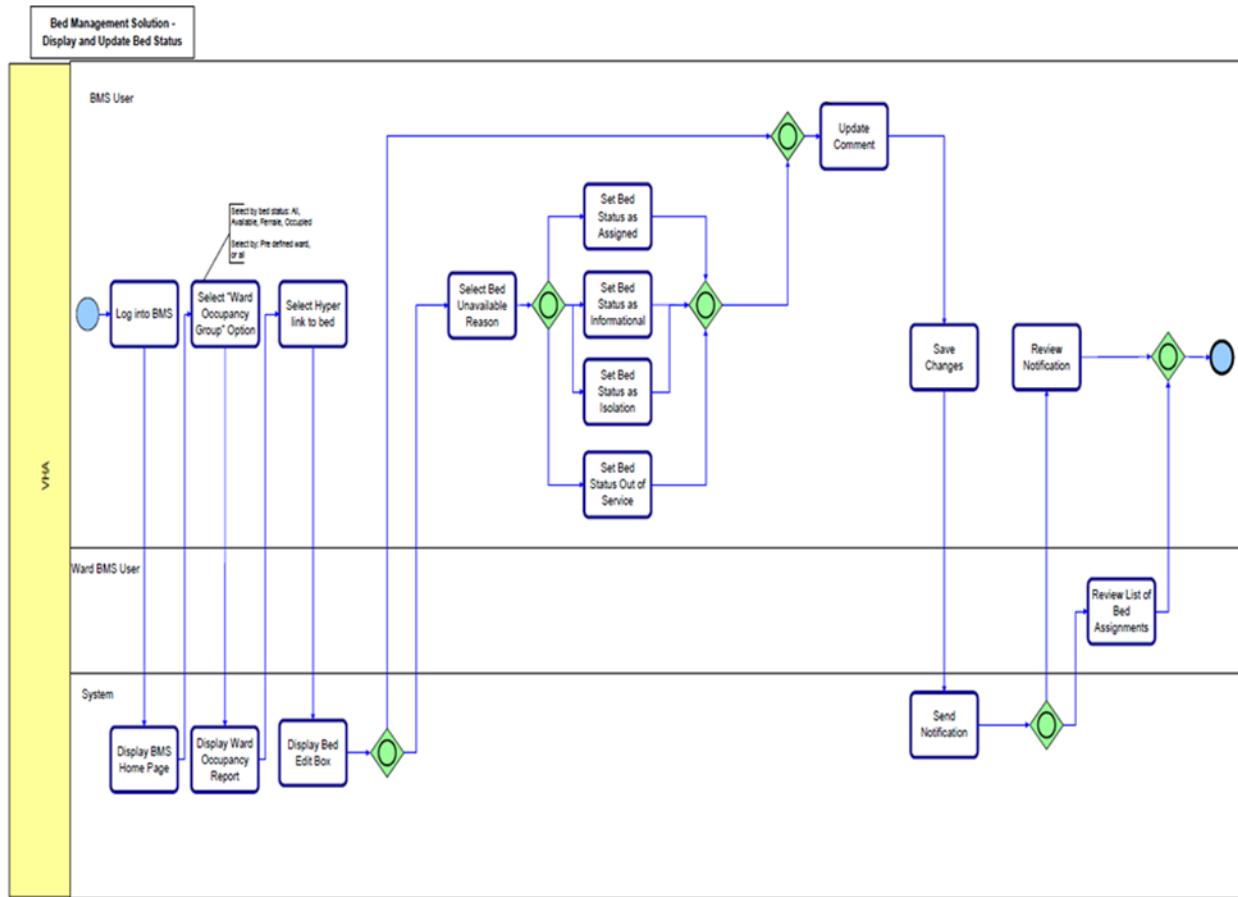


**Figure 102-Display and Update Bed Status Business Process**

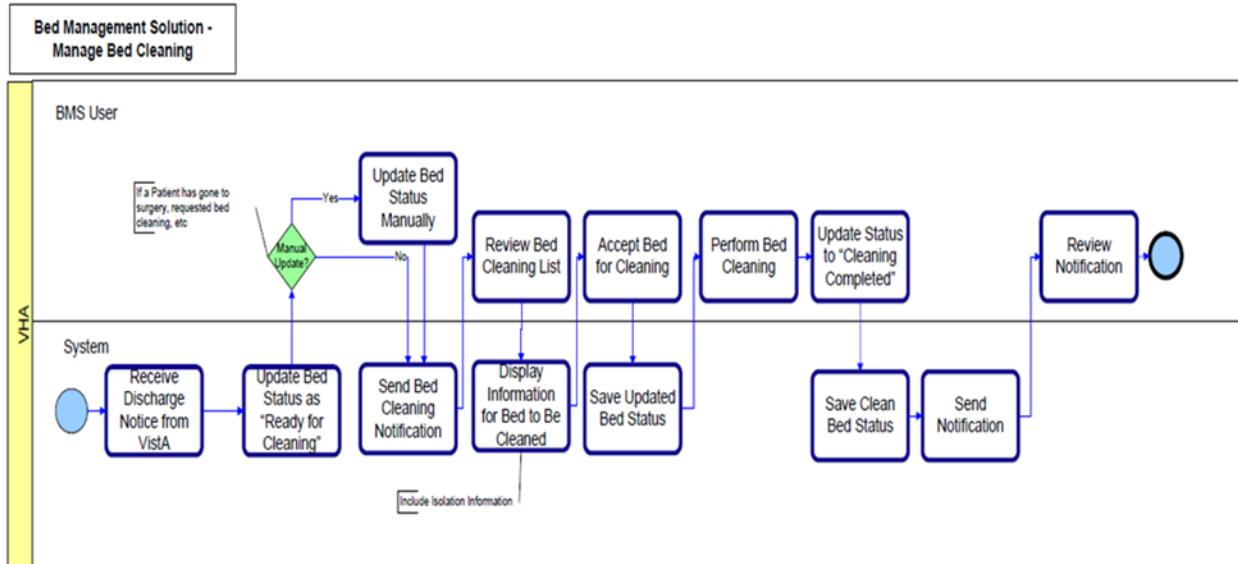


**Figure 103-Manage Bed Cleaning Business Process**

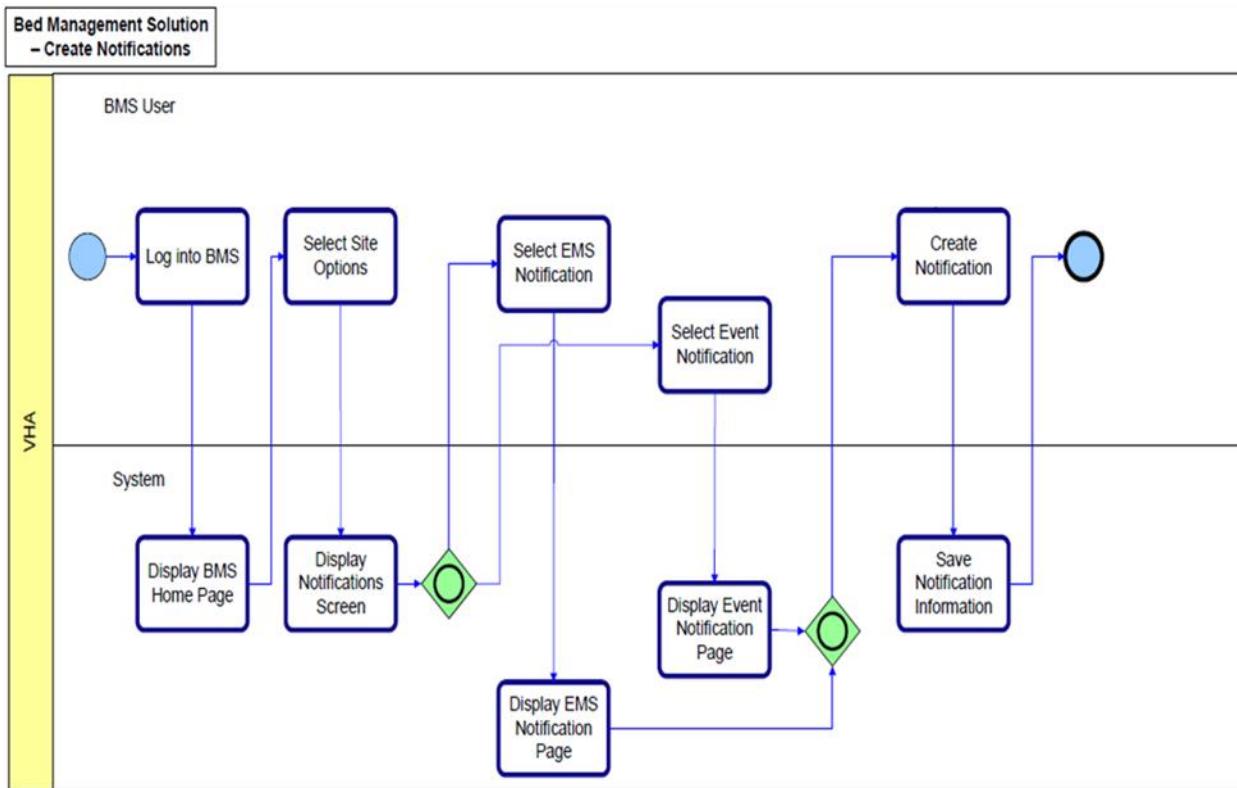


**Figure 104-Create Notification Business Process**

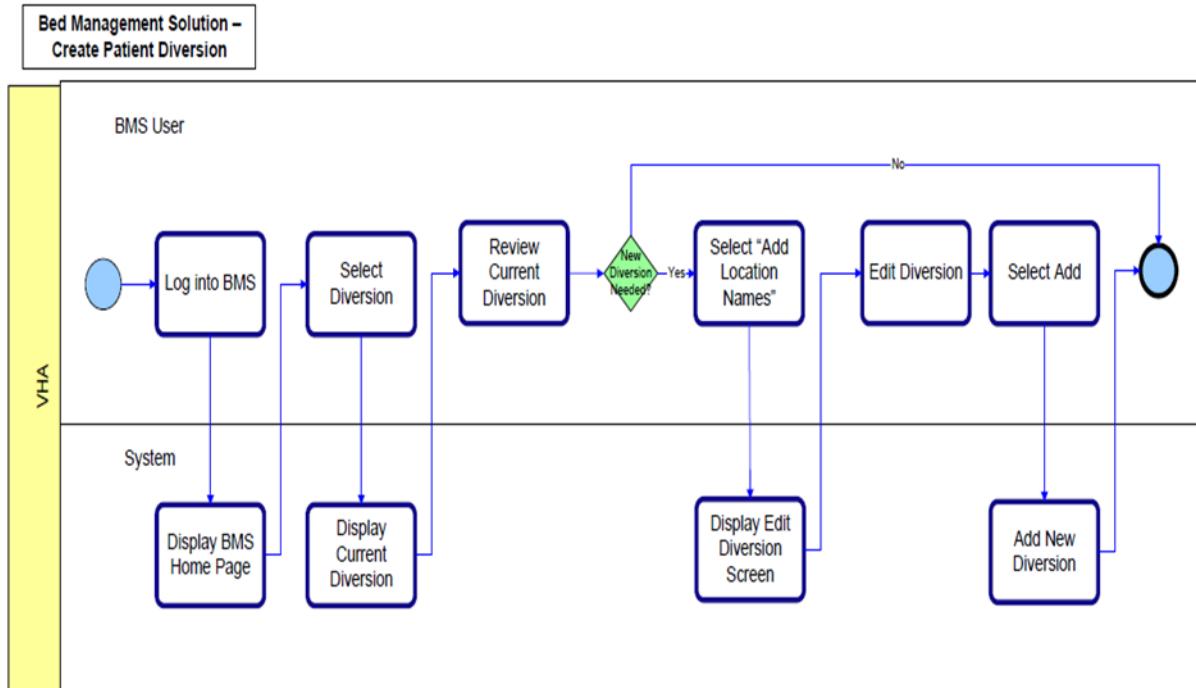

**Figure 105-Create Facility Diversion Business Process**

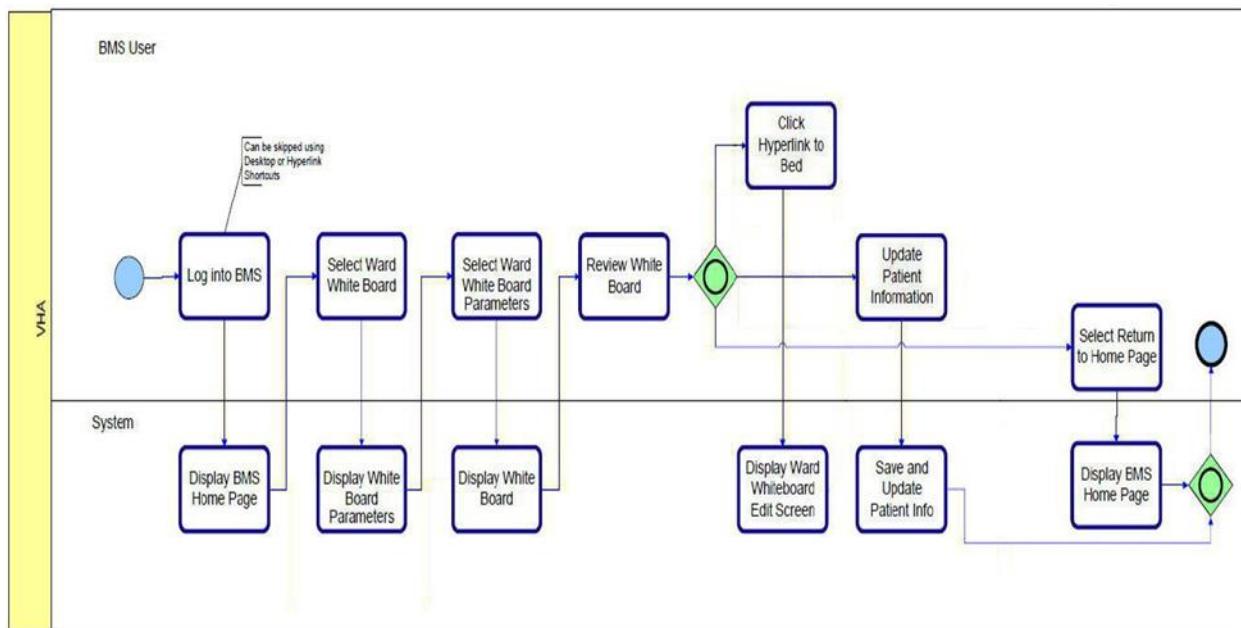


**Figure 106-Manage Whiteboard Business Process**

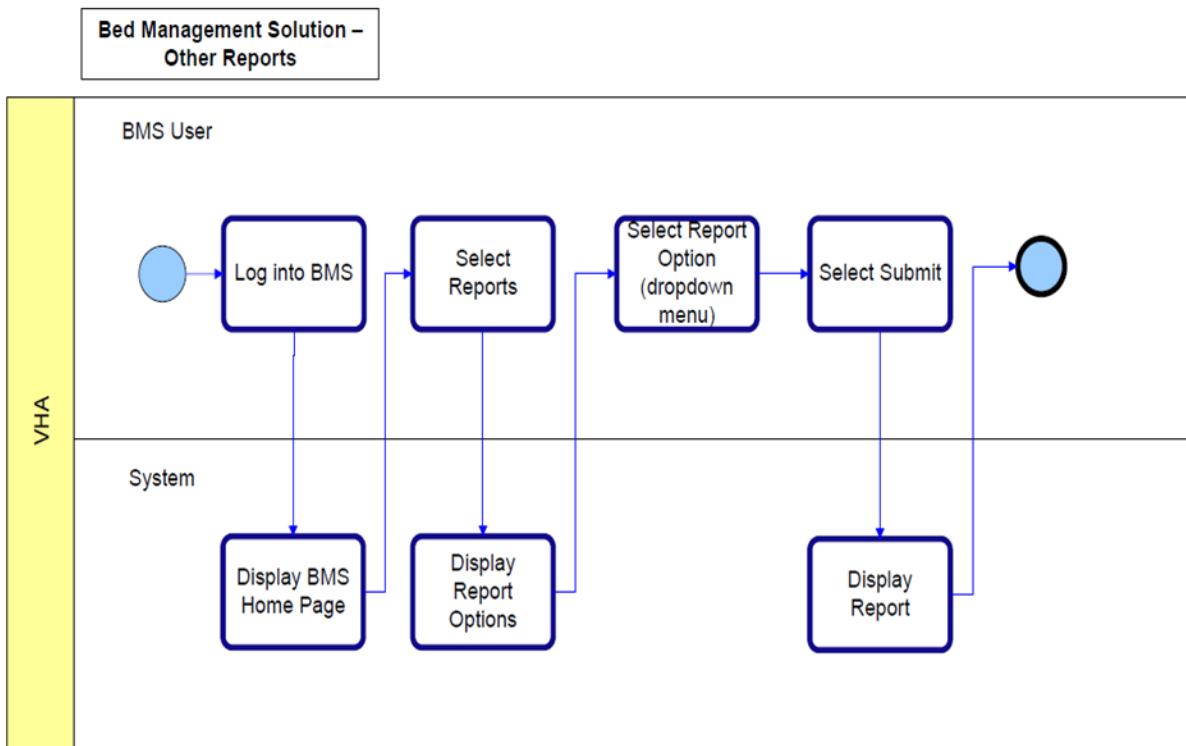

**Figure 107-Reports Business Process**

## 10.2 Activity Diagram

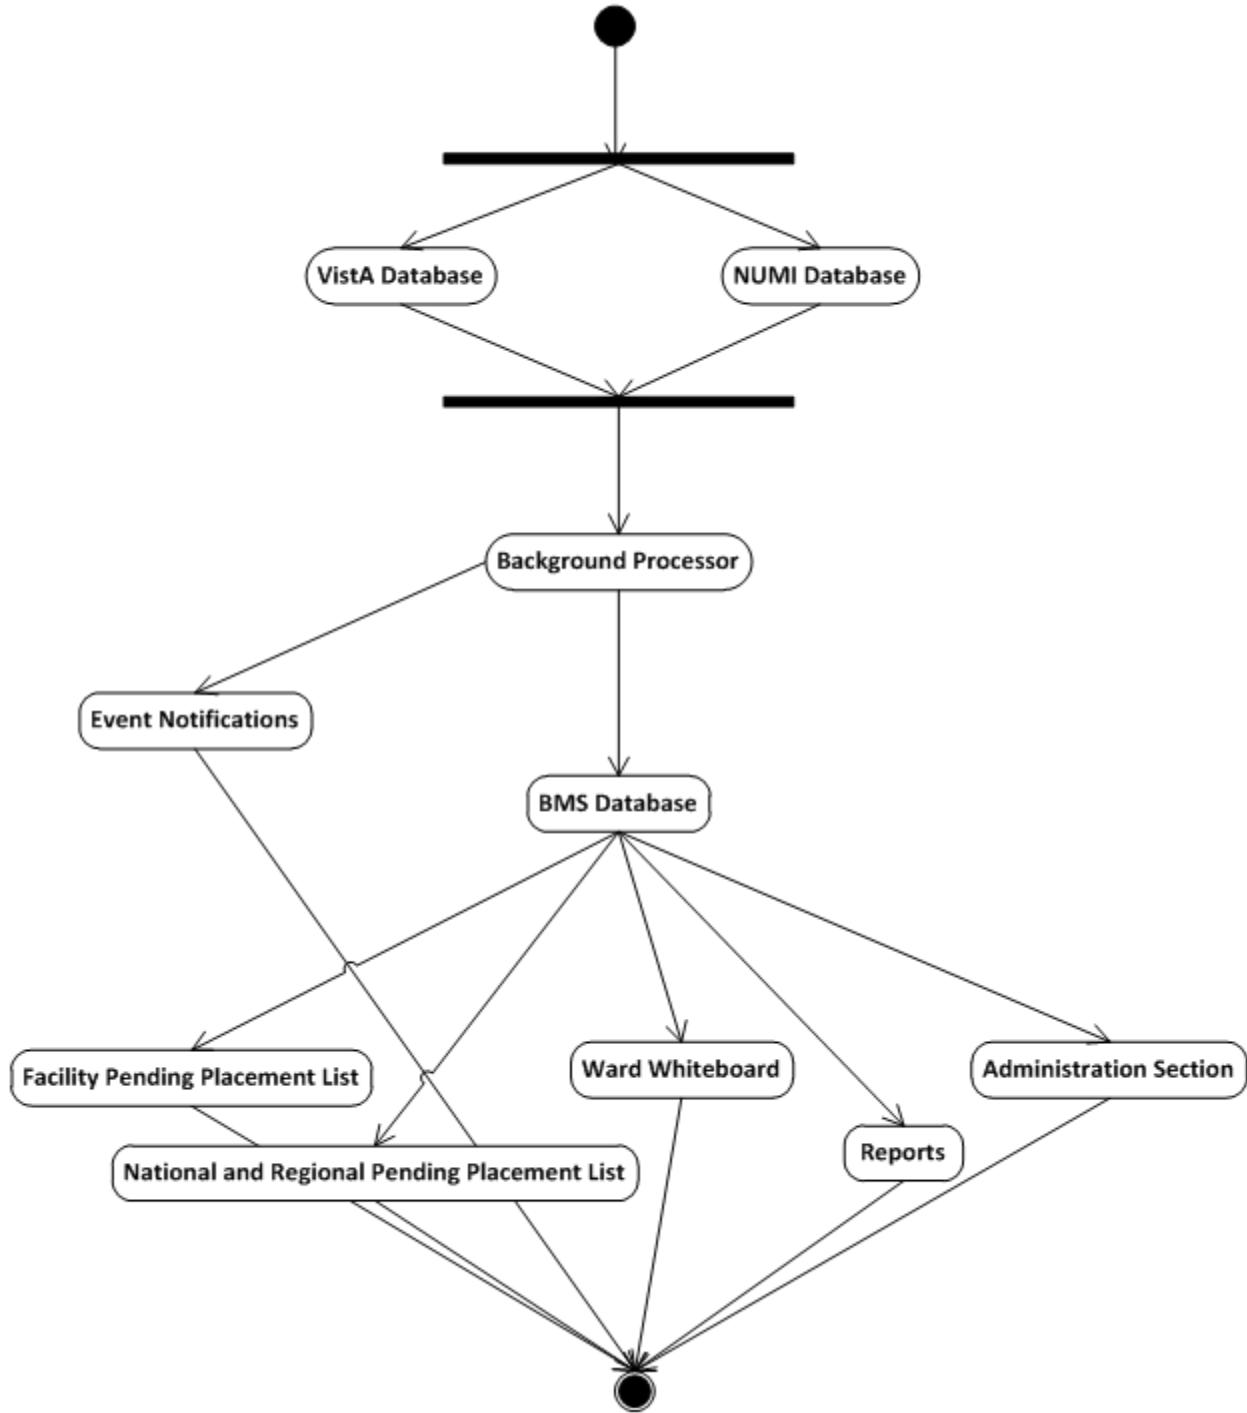

**Figure 108-BMS Overview Activity Diagram**

## 10.3 Functional Flow Diagram

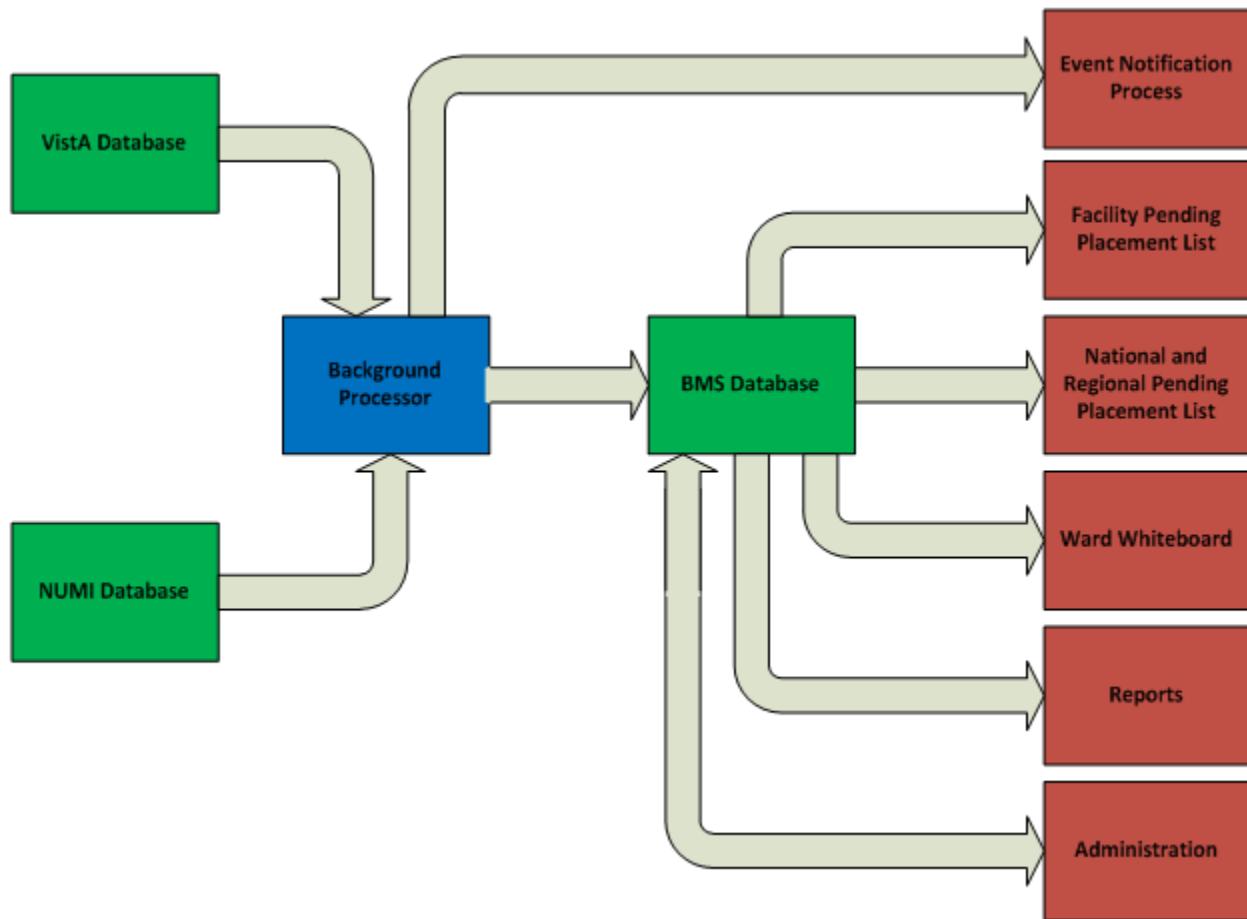


Figure 109-BMS Overview Functional Flow Diagram

## 9.4 Data Flow Diagram

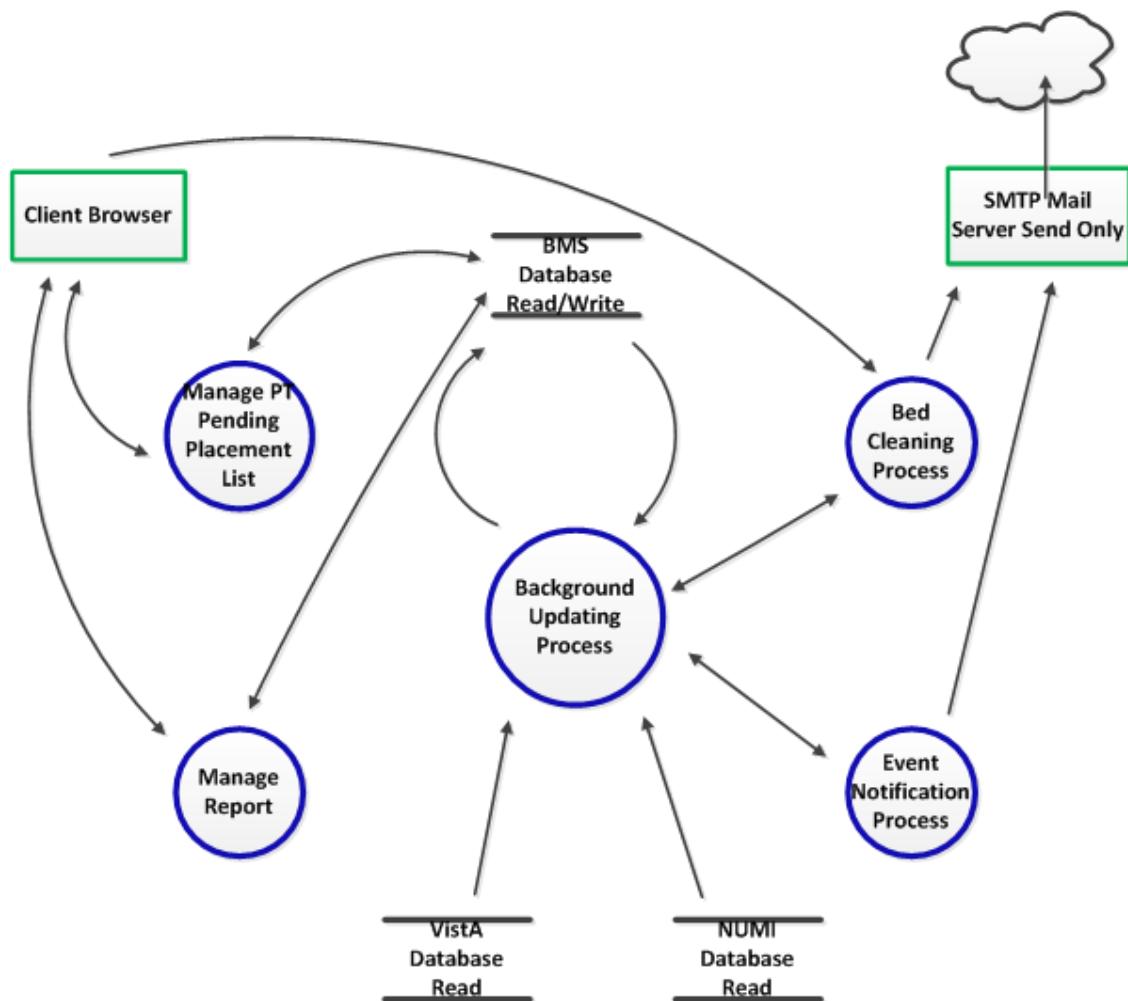


Figure 110-BMS Overview Data Flow Diagram

## 9.5 Application Flow Map from APPDYNAMICS

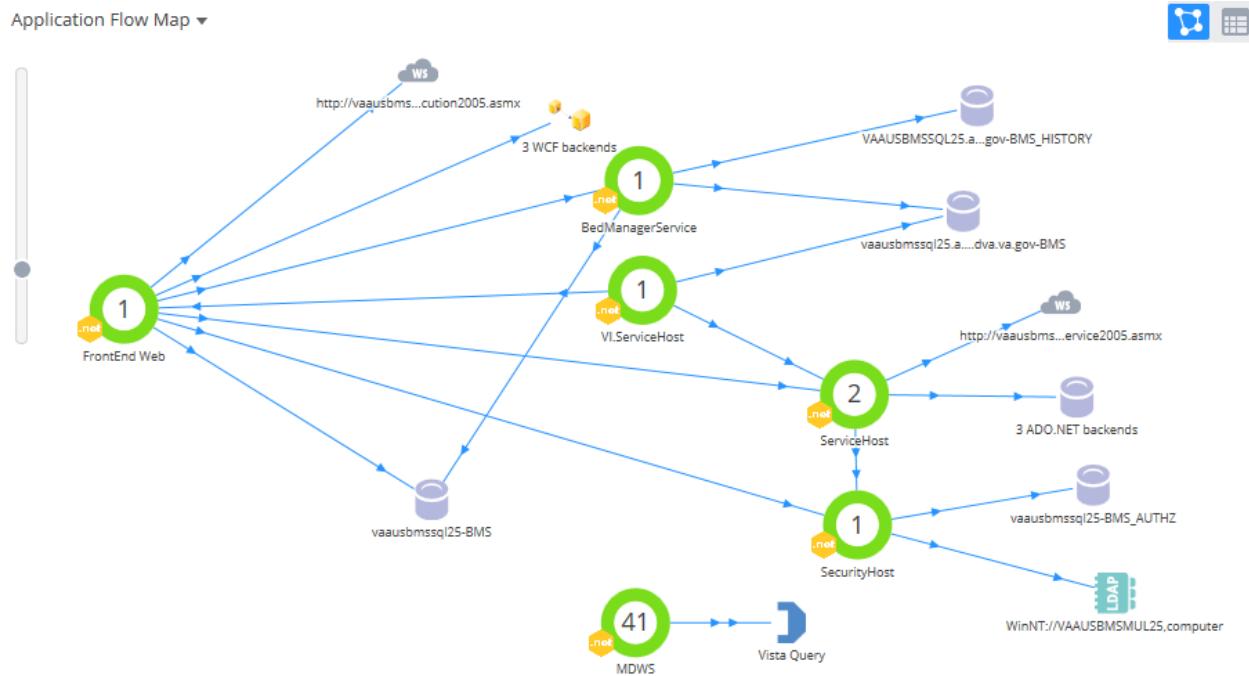


Figure 111-Application Flow map from APPDYNAMICS

## 11 Appendix B - Terms, Acronyms, and Abbreviations

Table 29-Terms, Acronyms, and Abbreviations

Terms, Acronyms, Abbreviations	Definitions
ASP	Active Server Pages
BMS	Bed Management Solution
CRUD	Create, Read, Update, Delete
EIS	Entity Identification Service
EMS	Environmental Management Service
ETL	Extract Transform Load
EVS	Enterprise Vocabulary Service
IE	Internet Explorer
IIS	Internet Information Services
IRM	Information Resources Management
MDO	Medical Domain Objects
MDWS	Medical Domain Web Services
MVC	Model-View-Controller
NUMI	National Utilization Management Integration

ODBC	Open Database Connectivity
PAP	Policy Administration Point
PPBPL	Patients Pending Bed Placement List . A list of patients in need of beds at VA facilities
PDP	Policy Decision Point
RS	Reporting Services
SOA	Service Oriented Architecture
SQL	Structured Query Language
STS	Secure Token Service
URI	Uniform Resource Identifier
URL	Uniform Resource Locator
VA	Department of Veterans Affairs
VAMC	VA Medical Center
VIA	Vista Integration Adapter
VISN	Veterans Integrated Service Network
VistA	Veterans Health Information Systems and Technology Architecture
WCF	Windows Communication Foundation
XAML	Extensible Application Markup Language
XML	eXtensible Markup Language
WMI	Windows Management Instrumentation